

collection 2013 2014

Chest Coolers & Freezers
Display Coolers
Upright Coolers & Freezers
Countertop & Can Coolers
Island Coolers & Serve Over Display Cabinets
Stainless Steel
Ice Makers



Top quality in a global brand



Innovative.

Environment-friendly.

Energy efficient.

Flexible.

Service-oriented.

Cooperative.

Close to you – wherever you are.

Let AHT be there for you!

Contents

Transport damage	6
Temperature requirements, Climate classes, Temperature classes	7

CHEST COOLERS & FREEZERS



08/39

DISPLAY COOLERS



40/59

UPRIGHT COOLERS & FREEZERS



60/69

COUNTERTOP & CAN COOLERS



70/79

ISLAND COOLERS & SERVE OVER DISPLAY CABINETS



80/91

STAINLESS STEEL COOLERS & FREEZERS



92/105

ICE MAKERS



106/115



Transport damage:

Attention! Once you have accepted the shipment, proving the origin of any damage will be your responsibility. Unconfirmed transport damages or claims made with a delay cannot be acknowledged.

Correct procedure:

■ **Obvious damage to packaging**

Refuse to accept the shipment, or unpack the delivery in the presence of the driver and have him acknowledge the damage on the waybill.


■ **Damage to contents**

In order to process the damage event, we require the original waybill as well as photographic evidence of the damage and a factual report. Please retain the packaging.

All damage reports must occur within 24 hours of delivery!

Please contact your AHT contact person!



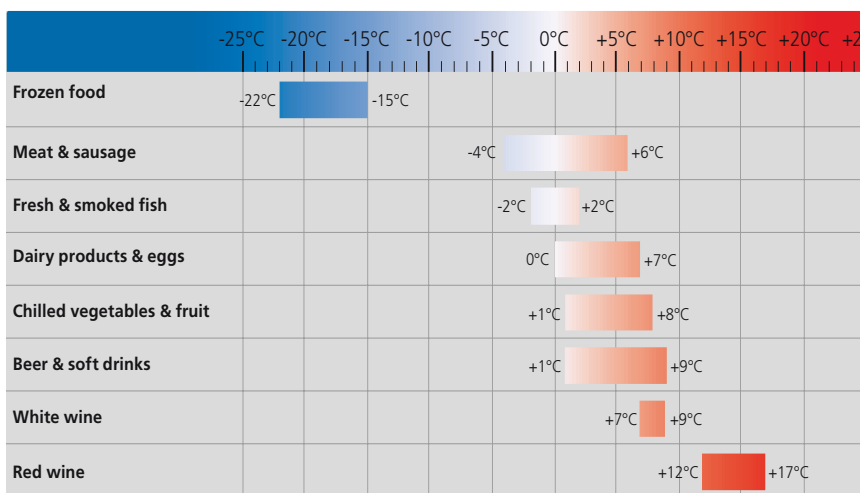

Temperature requirements for food and beverages

Climate class		Max. environmental conditions	
Climate class 3		25 °C	60 % RH
Climate class 4		30 °C	55 % RH
Climate class 5		40 °C	40 % RH
Climate class 6		27 °C	70 % RH
Climate class 7		35 °C	70 % RH
Climate class 8		24 °C	60 % RH
Extended normal	SN	10 °C to 32 °C	
Normal	N	16 °C to 38 °C	
Subtropics	ST	18 °C to 38 °C	
Tropics	T	16 °C to 43 °C	

Overview of climate classes

Class	Highest temperature of warmest M-package equal or lower than °C	Highest temperature of coldest M-package equal or higher than °C	Lowest temperature of warmest M-package equal or lower than °C
L1	-15	-	-18
L2	-12	-	-18
M1	+5	-1	-
M2	+7	-1	-
H	+10	+1	-
S	Special class		

Overview of temperature classes



Chest Coolers & Freezers

ATHEN XL ECO	10
ATHEN XL	12
MIAMI	14
PARIS	16
MANHATTAN	18
MALTA	20
SALZBURG	22
Accessories	24
IMPULSE FREEZER WITH CURVED GLASS SLIDING LID	
RIO S/G	36
IMPULSE FREEZER WITH FLAT GLASS SLIDING LID	
RIO H/G	36
IMPULSE FREEZER WITH INSULATED GLASS SLIDING LID	
RIO H/S	37
SHOWCASE DISPLAY FREEZERS WITH FLAT GLASS SLIDING LIDS FOR SCOOPING ICE CREAM	
SAO PAULO H/G	37
Accessories	38
ACAPULCO	39
STORAGE FREEZERS	39



ATHEN XL ECO



The perfect solution – built in semi-automatic defrost! (AD)

Regular defrosting...

...with goods kept at a constant temperature

KEY BENEFIT:

- High energy savings compared with conventional open units
- Maximum energy efficiency thanks to electronic speed-controlled compressor (VS)
- AHT e-conomize: Massive additional power saving potential due to extensive optimizations in technology and construction
- New synthetic interior casing for better hygiene and easy cleaning
- Improved viewing of merchandise and optimized capacity
- Ecologically sound thanks to the natural refrigerant propane (R290)
- 100 % CFC- and PFC-free
- Constant interior temperature and high power reserves ensure high merchandise quality
- Ready to plug in – no additional assembly required
- Low costs for investment and operation
- Maintenance-free cooling technology

FLEXIBLE LOCATION OPTIONS

- Stand alone unit
- Line up
- Can be used as an island
- Maximizes the use of floor space by use with an end cabinet
- Can be extended using standard shelving systems

Universal cabinet(U):

Cabinet covers all three temperature ranges of refrigeration +3 °C to +15 °C** / meat and minced meat refrigeration 0°C to +2 °C / freezing –18 °C to –23 °C.

* Preset is fixed at 4 °C – possibility to change to another temperature by a service technician



e-conomize POWER SAVER PLUS

ATHEN XL ECO 207 End cabinet

Model	(-) AD VS LED	(U) AD VS LED
External Dimensions (WxDxH f/r) [mm]	2080x994x800/910	2080x994x800/910
Internal Dimensions (WxDxH f/r) [mm]	1948x863x684/785	1948x863x684/785
Volume gross /net [l]	1167 /868	1167 /(+)848/(S)566/(-)817
Inner temperature range [°C]	–18 to –23	+3 to +15/0 to +2/ –18 to –23
Refrigerant type	R290	R290
Nominal voltage/frequency [V/Hz]	220–240/50	220–240/50
Nominal power cabinet (incl. internal LED-light) [W]	511	511
Energy consumption (at 25 °C) [kWh/24 h]	7,2	(+)3,3/(S)3,6/(-)7,2
Weight gross/net [kg]	149/138	158/147





ATHEN XL ECO 175-210

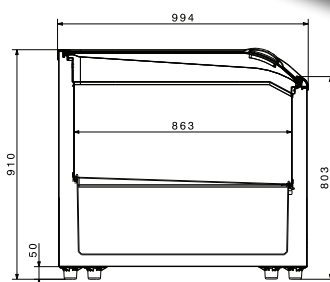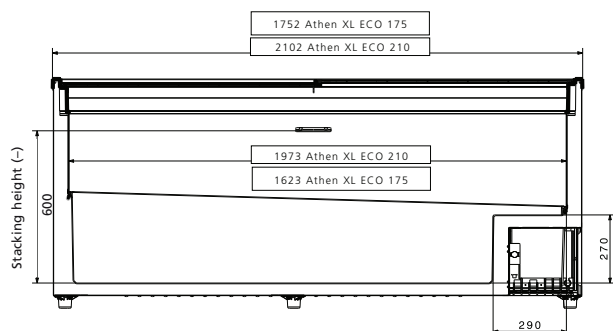

● For optional accessories see page 26-35


End cabinet ATHEN XL ECO 207

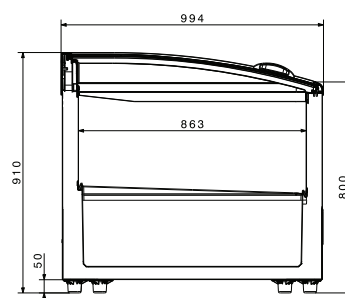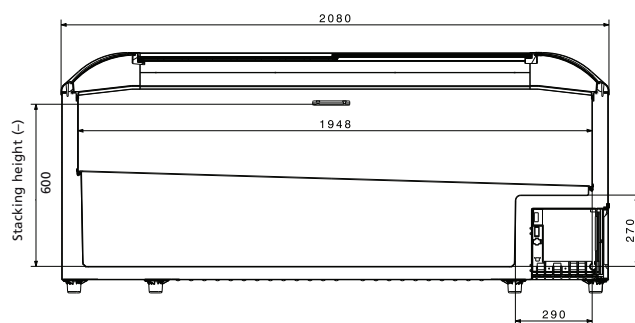


e-conomize POWER SAVER PLUS

ATHEN XL ECO 175		ATHEN XL ECO 210	
(-) AD VS LED	(U) AD VS LED	(-) AD VS LED	(U) AD VS LED
1752x994x803/910	1752x994x803/910	2102x994x803/910	2102x994x803/910
1623x863x684/785	1623x863x684/785	1973x863x684/785	1973x863x684/785
961/709	961/(+)684/(S)455/(-)659	1183/880	1183/(+)860/(S)575/(-)830
-18 to -23	+3 to +15/0 to +2/ -18 to -23	-18 to -23	+3 to +15/0 to +2/ -18 to -23
R290	R290	R290	R290
220-240/50	220-240/50	220-240/50	220-240/50
463	463	502	502
6,2	(+)3,0/(S)3,1/(-)6,2	6,4	(+)3,1/(S)3,4/(-)6,4
136/125	147/136	150/139	164/153

ATHEN XL

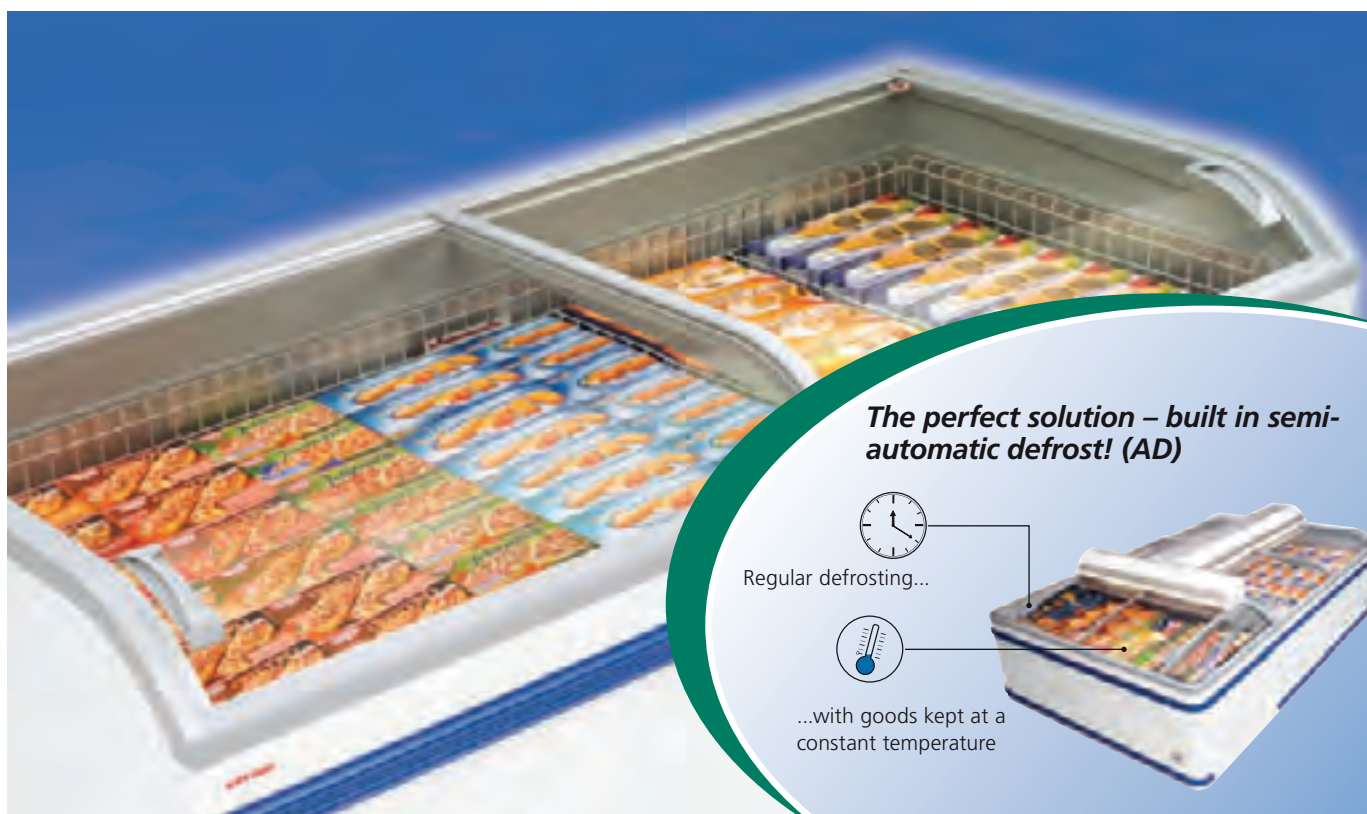

The perfect solution – built in semi-automatic defrost! (AD)

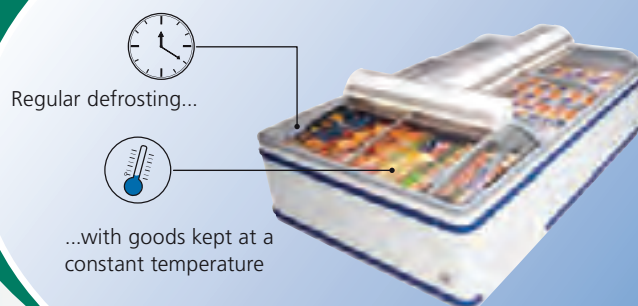


KEY BENEFIT:

- High energy savings compared with conventional open units
- Maximum energy efficiency thanks to electronic speed-controlled compressor (VS)*
- Improved viewing of merchandise and optimized capacity
- Ecologically sound thanks to the natural refrigerant propane (R290)
- 100 % CFC- and PFC-free
- Constant interior temperature and high power reserves ensure high merchandise quality
- Ready to plug in – no additional assembly required
- Low costs for investment and operation
- Maintenance-free
- Intelligent fan motor for more energy efficiency – saves approximately 0,5 kWh daily (optional)

FLEXIBLE LOCATION OPTIONS

- Stand alone unit
- Line up
- Can be used as an island
- Maximizes the use of floor space by use with an end cabinet
- Can be extended using standard shelving systems





Universal cabinet(U):

Cabinet covers all three temperature ranges of refrigeration +3 °C to +15 °C** / meat and minced meat refrigeration 0°C to +2 °C / freezing –18 °C to –23 °C.

* RPM-regulated compressor only available with refrigerant R290.



* Preset is fixed at 4 °C – possibility to change to another temperature by a service technician

STANDARD COMPRESSOR WITH REFRIGERANT R404A							
		ATHEN XL 207 End cabinet		ATHEN XL 210		ATHEN XL 175	
Model		(-) AD	(U) AD	(-) AD	(U) AD	(-) AD	(U) AD
External Dimensions (WxDxH f/r)	[mm]	2080x996x800/910	2080x996x800/910	2102x993x800/910	2102x993x800/910	1752x993x800/910	1752x993x800/910
Internal Dimensions (WxDxH f/r)	[mm]	1945x860x684/785	1945x860x684/785	1970x860x684/785	1970x860x684/785	1620x860x684/785	1620x860x684/785
Volume gross/net	[l]	1158/863	1158/(+)843/(S)528/(-)813	1177/875	1177/(+)856/(S)536/(-)825	956/710	956/(+)680/(S)452/(-)655
Inner temperature range	[°C]	–18 to –23	+3 to +15/0 to +2/–18 to –23	–18 to –23	+3 to +15/0 to +2/–18 to –23	–18 to –23	+3 to +15/0 to +2/–18 to –23
Refrigerant type		R404A	R404A	R404A	R404A	R404A	R404A
Nominal voltage/frequency	[V/Hz]	220–240/50	220–240/50	220–240/50	220–240/50	220–240/50	220–240/50
Nominal power cabinet	[W]	530	530	510	510	490	490
Energy consumption (at 25 °C)[kWh/24 h]		13,5	(+)3,5/(S)6,3/(-)13,5	11,5	(+)3,0/(S)5,3/(-)11,5	9,7	(+)2,7/(S)4,5/(-)9,7
Weight gross/net	[kg]	149/138	158/147	152/141	163/152	136/125	145/134

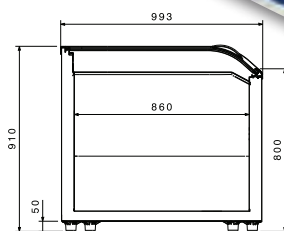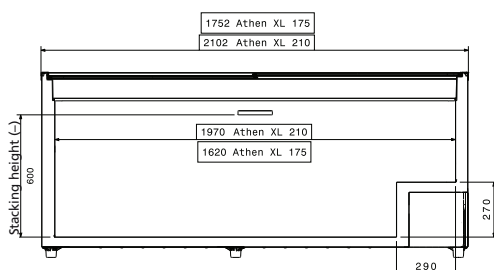

For optional accessories see page 26-35

End cabinet ATHEN XL 207

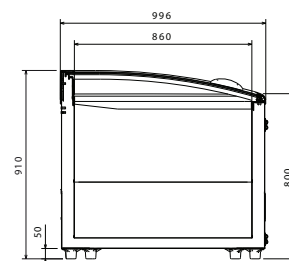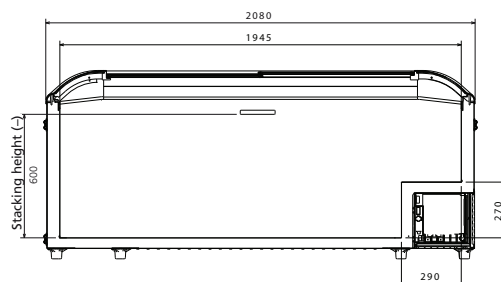


For version AD/U the inner dimensions are reduced due to the necessary use of wire grids along the inside walls.

RPM-REGULATED COMPRESSOR ONLY AVAILABLE WITH REFRIGERANT R290.							
ATHEN XL 207 End cabinet			ATHEN XL 210			ATHEN XL 175	
(-) VS	(-) AD VS	(U) AD VS	(-) VS	(-) AD VS	(U) AD VS	(-) AD VS	(U) AD VS
2080x996x800/910	2080x996x800/910	2080x996x800/910	2102x993x800/910	2102x993x800/910	2102x993x800/910	1752x993x800/910	1752x993x800/910
1945x860x684/785	1945x860x684/785	1945x860x684/785	1970x860x684/785	1970x860x684/785	1970x860x684/785	1620x860x684/785	1620x860x684/785
1158/936	1158/863	1158/(+)849/(S)566/(-)817	1177/949	1177/875	1177/(+)860/(S)595/(-)830	956/705	956/(+)680/(S)417/(-)655
-18 to -23	-18 to -23	+3 to +15/0 to +2/-18 to -23	-18 to -23	-18 to -23	+3 to +15/0 to +2/-18 to -23	-18 to -23	+3 to +15/0 to +2/-18 to -23
R290	R290	R290	R290	R290	R290	R290	R290
220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
470	470	470	450	450	450	400	400
9,4	9,9	(+)4,4/(S)4,7/(-)9,9	8,2	8,7	(+)4,2/(S)4,4/(-)8,7	8,5	(+)4,0/(S)4,2/(-)8,5
140/129	149/138	158/147	143/132	152/141	163/152	136/125	145/134

MIAMI



The perfect solution – built in semi-automatic defrost! (AD)

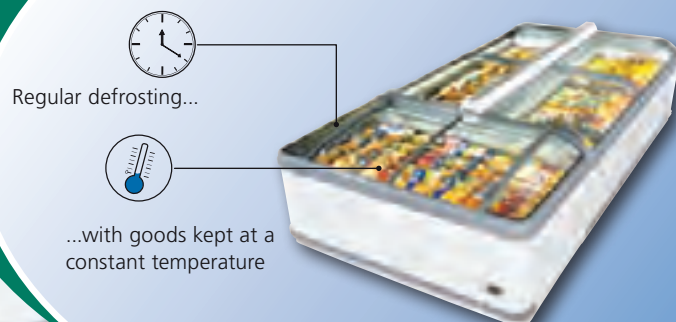


KEY BENEFIT:

- High energy savings compared with conventional open units
- Maximum energy efficiency thanks to electronic speed-controlled compressor (VS)
- AHT e-conomize: Massive additional power saving potential due to extensive optimizations in technology and construction
- New synthetic interior casing for better hygiene and easy cleaning
- Improved viewing of merchandise and optimized capacity
- Ecologically sound thanks to the natural refrigerant propane (R290)
- 100 % CFC- and PFC-free
- Ready to plug in – no additional assembly required
- Low costs for investment and operation
- Maintenance-free
- Low front access height for convenient merchandise placement and withdrawal

FLEXIBLE LOCATION OPTIONS

- Stand alone unit
- Line up
- Can be used as an island
- Maximizes the use of floor space by use with an end cabinet
- Can be extended using standard shelving systems



Universal cabinet(U):



Cabinet covers all three temperature ranges of refrigeration +3 °C to +15 °C** / meat and minced meat refrigeration 0°C to +2 °C / freezing –18 °C to –23 °C.

* Preset is fixed at 4 °C – possibility to change to another temperature by a service technician



E-CONOMIZE POWER SAVER PLUS

MIAMI 185 End cabinet

Model	(-) AD VS ECO LED	(U) AD VS ECO LED
External Dimensions (WxDxH f/r) [mm]	1850x994x722/834	1850x994x722/834
Internal Dimensions (WxDxH f/r) [mm]	1723x863x655/705	1723x863x655/705
Volume gross/net [l]	912/595	912/(+574/(S)342/(-)547
Inner temperature range [°C]	-18 to -23	+3 to +15/0 to +2/ -18 to -23
Refrigerant type	R290	R290
Nominal voltage/frequency [V/Hz]	220-240/50	220-240/50
Nominal power cabinet (incl. internal LED-light) [W]	539	539
Energy consumption (at 25 °C) [kWh/24 h]	5,1	(+)2,1/(S)3,3/(-)5,1
Weight gross/net [kg]	133/123	142/132

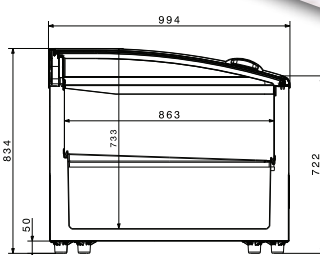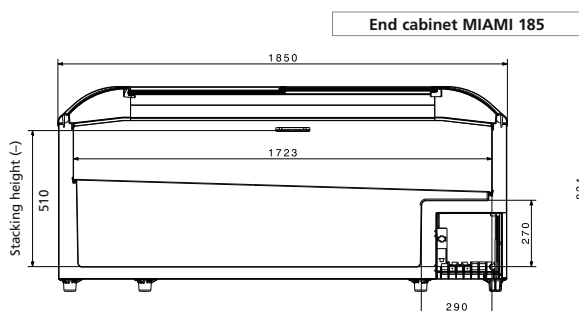

● For optional accessories see page 26-35

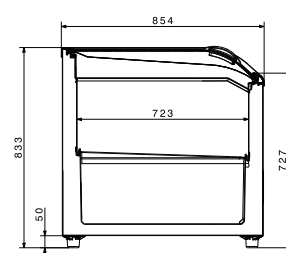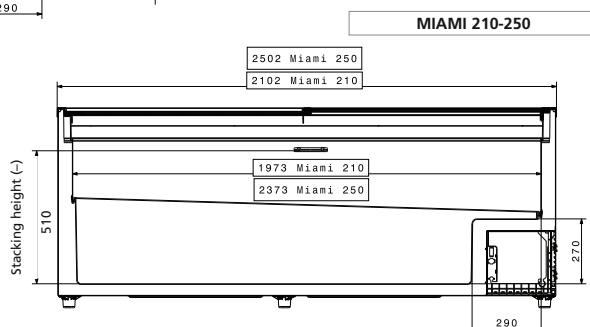


For version AD/U the inner dimensions are reduced due to the necessary use of wire grids along the inside walls.

E-CONOMIZE POWER SAVER PLUS					
MIAMI 145		MIAMI 210		MIAMI 250	
(-) AD VS ECO LED	(U) AD VS ECO LED	(-) AD VS ECO LED	(U) AD VS ECO LED	(-) AD VS ECO LED	(U) AD VS ECO LED
1457x854x727/833	1457x854x727/833	2102x854x727/833	2102x854x727/833	2502x854x727/833	2502x854x727/833
1328x723x655/705	1328x723x655/705	1973x723x655/705	1973x723x655/705	2373x723x655/705	2373x723x655/705
592/390	592/(+367/(S)226/(-)350	908/612	908/(+597/(S)373/(-)572	1104/749	1104/(+740/(S)465/(-)709
-18 to -23	+3 to +15/0 to +2/ -18 to -23	-18 to -23	+3 to +15/0 to +2/ -18 to -23	-18 to -23	+3 to +15/0 to +2/ -18 to -23
R290	R290	R290	R290	R290	R290
220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
436	436	542	542	552	552
4,5	(+1,8/(S)2,8/(-)4,5	4,9	(+2,2/(S)3,3/(-)4,9	5,3	(+2,5/(S)3,9/(-)5,3
103/97	112/106	150/139	159/148	168/157	177/166

PARIS



The perfect solution – built in semi-automatic defrost! (AD)

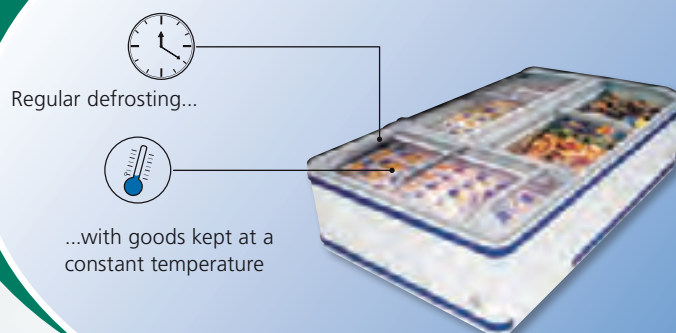

KEY BENEFIT:

- High energy savings compared with conventional open units
- Maximum energy efficiency thanks to electronic speed-controlled compressor (VS)*
- Improved viewing of merchandise and optimized capacity
- Ecologically sound thanks to the natural refrigerant propane (R290)
- 100 % CFC- and PFC-free
- Ready to plug in – no additional assembly required
- Low costs for investment and operation
- Maintenance-free cooling technology
- Intelligent fan motor for more energy efficiency – saves approximately 0,5 kWh daily (optional)
- All cabinets also available with semi-automatic defrost system (AD).***

FLEXIBLE LOCATION OPTIONS

- Stand alone unit 
- Line up 
- Can be used as an island 
- Maximizes the use of floor space by use with an end cabinet 
- Can be extended using standard shelving systems

Universal cabinet(U):

Cabinet covers all three temperature ranges of refrigeration +3 °C to +15 °C** / meat and minced meat refrigeration 0°C to +2 °C / freezing –18 °C to –23 °C.

** Preset is fixed at 4 °C – possibility to change to another temperature by a service technician



* RPM-regulated compressor only available with refrigerant R290.

STANDARD COMPRESSOR WITH REFRIGERANT R404A							
		PARIS 145	PARIS 185 End cabinet		PARIS 210		PARIS 250
Model		(–)	(–)	(U)	(–)	(U)	(U)
External Dimensions [mm]		1457x853x770/833	1854x853x770/833	1854x853x770/833	2102x853x770/833	2102x853x770/833	2502x853x770/833
Internal Dimensions [mm]		1325x720x655/705	1720x720x655/705	1720x720x655/705	1970x720x655/705	1970x720x655/705	2370x720x655/705
Volume gross/net [l]		592/468	785/625	785/(+615/(S)358/(–)590)	908/724	908/(+718/(S)422/(–)689)	1104/882
Inner temperature range [°C]		–18 to –23	–18 to –23	+3 to +15/ 0 to +2/–18 to –23	–18 to –23	+3 to +15/ 0 to +2/–18 to –23	–18 to –23
Refrigerant type		R404A	R404A	R404A	R404A	R404A	R404A
Nominal voltage/frequency [V/Hz]		220–240/50	220–240/50	220–240/50	220–240/50	220–240/50	220–240/50
Nominal power cabinet [W]		415	520	520	530	530	547
Energy consumption (at 25 °C) [kWh/24 h]		6,7	7,7	(+2,6/(S)5,1/(–)8,3	8,2	(+2,5/(S)5,1/(–)8,2	8,7
Weight gross/net [kg]		96/89	122/112	139/129	138/127	156/145	156/145
							174/163


***For version AD/U, the inner dimensions and net volume are reduced due to the required wire grids along the inside walls.




End cabinet PARIS 185

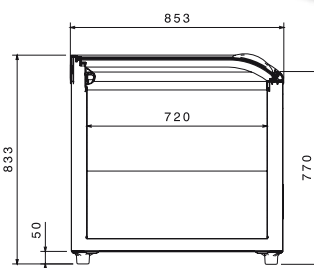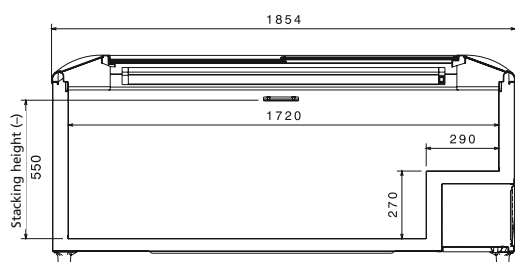

● For optional accessories see page 26-37

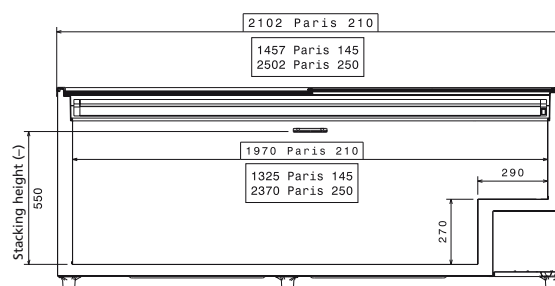

PARIS 145-250

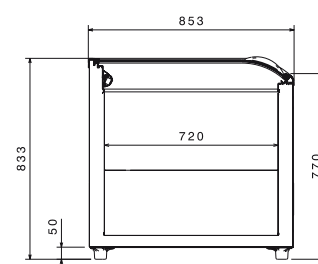


For version AD/U the inner dimensions are reduced due to the necessary use of wire grids along the inside walls.

RPM-REGULATED COMPRESSOR ONLY AVAILABLE WITH REFRIGERANT R290.							
PARIS 145		PARIS 185 End cabinet		PARIS 210		PARIS 250	
(-) AD VS	(U) AD VS	(-) AD VS	(U) AD VS	(-) AD VS	(U) AD VS	(-) AD VS	(U) AD VS
1457x853x770/833	1457x853x770/833	1854x853x770/833	1854x853x770/833	2102x853x770/833	2102x853x770/833	2502x853x770/833	2502x853x770/833
1325x720x655/705	1325x720x655/705	1720x720x655/705	1720x720x655/705	1970x720x655/705	1970x720x655/705	2370x720x655/705	2370x720x655/705
592/422	592/ (+)398/(S)258/(-)381	785/567	785/ (+)549/(S)358/(-)527	908/660	908/ (+)644/(S)422/(-)619	1104/807	1104/ (+)797/(S)524/(-)766
-18 to -23	-18 to -23	-18 to -23	+3 to +15/ 0 to +2/-18 to -23	-18 to -23	+3 to +15/ 0 to +2/-18 to -23	-18 to -23	+3 to +15/ 0 to +2/-18 to -23
R290	R290	R290	R290	R290	R290	R290	R290
220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
440	440	440	440	450	450	514	514
5,9	(+)2,0/(S)3,6/(-)5,9	6,7	(+)2,4/(S)3,8/(-)6,7	6,9	(+)2,6/(S)4,1/(-)6,9	7,5	(+)2,9/(S)4,5/(-)7,5
101/95	110/104	130/120	139/129	147/136	156/145	166/155	174/163

MANHATTAN



The perfect solution – built in semi-automatic defrost! (AD)

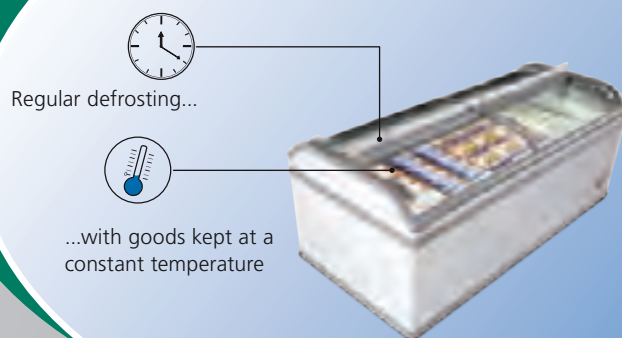

KEY BENEFIT:

- High energy savings compared with conventional open units
- Maximum energy efficiency thanks to electronic speed-controlled compressor (VS)
- AHT e-conomize: Massive additional power saving potential due to extensive optimizations in technology and construction
- New synthetic interior casing for improved hygiene and easy cleaning
- Ecologically sound thanks to the natural refrigerant propane (R290)
- 100 % CFC- and PFC-free
- Constant interior temperature and high power reserves ensure high merchandise quality
- Ready to plug in – no additional assembly required
- Low costs for investment and operation
- Maintenance-free
- Consumers can shop both sides at the same time without interference

FLEXIBLE LOCATION OPTIONS

- Stand alone unit
- Line up



Universal cabinet(U):

Cabinet covers all three temperature ranges of refrigeration +3 °C to +15 °C** / meat and minced meat refrigeration 0°C to +2 °C / freezing –18 °C to –23 °C.

* Preset is fixed at 4 °C – possibility to change to another temperature by a service technician

E-CONOMIZE POWER SAVER PLUS



MANHATTAN 210

Model	(-) AD VS ECO LED	(U) AD VS ECO LED
External Dimensions (WxDxH) [mm]	2103x995x910	2103x995x910
Internal Dimensions (WxDxH) [mm]	1973x863x684	1973x863x684
Volume gross/net [l]	1166/817	1166/(+)799/(S)513/(-)768
Inner temperature range [°C]	–18 to –23	+3 to +15/0 to +2/ –18 to –23
Refrigerant type	R290	R290
Nominal voltage/frequency [V/Hz]	220–240/50	220–240/50
Nominal power cabinet (incl. internal LED-light) [W]	472	472
Energy consumption (at 25 °C) [kWh/24 h]	6,4	(+)3,2/(S)3,5/(-)6,4
Weight gross/net [kg]	156/145	165/154



● For optional accessories see page 26-35

EXCELLENT
MERCHANDISE VISIBILITY
FROM ALL SIDES

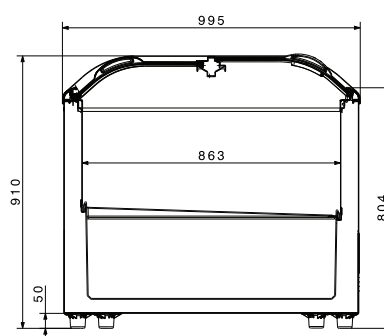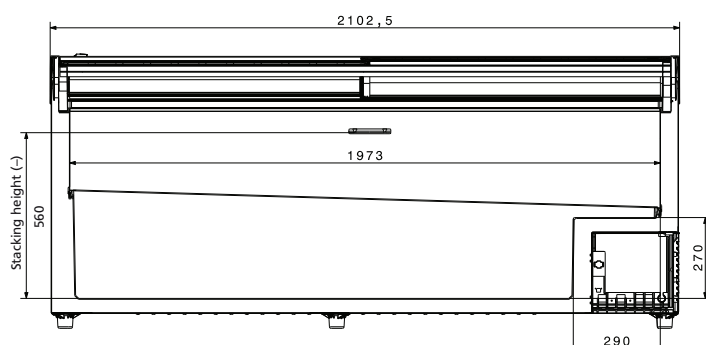

For version AD/U the inner dimensions are reduced due to the necessary use of wire grids along the inside walls.

MALTA



KEY BENEFIT:

- Higher energy-saving can be achieved in comparison to conventional open units
- Improved viewing of merchandise and optimized capacity
- Constant interior temperature and high power reserves ensure high merchandise quality
- Ready to plug in immediately as it is an integral cabinet
- Low costs for investment and operation
- Maintenance-free
- Intelligent fan motor for more energy efficiency – saves approximately 0,5 kWh daily (optional)
- Easy access from both sides

Universal cabinet(U):

Cabinet covers all three temperature ranges of refrigeration +3 °C to +15 °C** / meat and minced meat refrigeration 0°C to +2 °C / freezing –18 °C to –23 °C.

** Preset is fixed at 4 °C – possibility to change to another temperature by a service technician


REFRIGERANT TYPE R404A		
MALTA 145		
Model	(–)	(U) AD
External Dimensions (WxDxH) [mm]	1456x855x833	1456x855x833
Internal Dimensions (WxDxH) [mm]	1325x720x655	1325x720x655
Volume gross/net [l]	555/411	555/(+348/ (S)241/(–)331
Inner temperature range [°C]	–18 to –23	+3 to +15/0 to +2/ –18 to –23
Refrigerant type	R404A	R404A*
Nominal voltage/frequency [V/Hz]	220–240/50	220–240/50
Nominal power cabinet (incl. internal LED-light) [W]	495	495
Energy consumption (at 25 °C) [kWh/24 h]	8,8	(+)2,0/ (S)4,0/(–)9,4
Weight gross/net [kg]	104/97	125/117

* Also available with refrigerant R290 on request; depending on quantity



EXCELLENT
MERCHANDISE VISIBILITY
FROM ALL SIDES


● For optional accessories see page 26-35

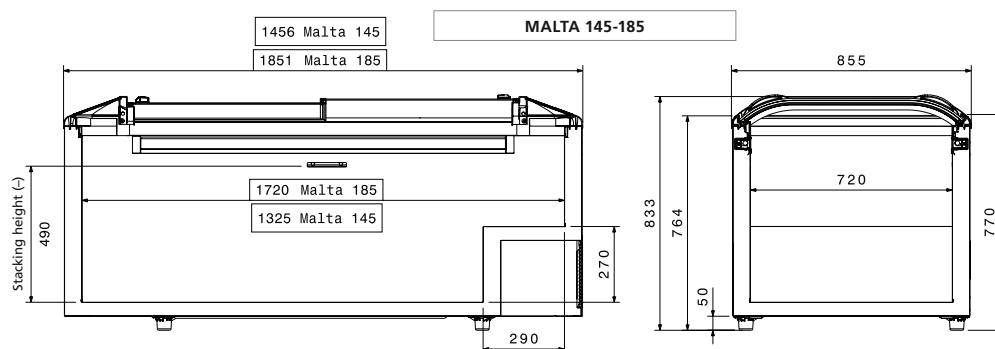

For version AD/U the inner dimensions are reduced due to the necessary use of wire grids along the inside walls.

REFRIGERANT TYPE R404A			
MALTA 185			
(-)	(-) AD	(U)	(U) AD
1851 x 855 x 833	1851 x 855 x 833	1851 x 855 x 833	1851 x 855 x 833
1720 x 720 x 655	1720 x 720 x 655	1720 x 720 x 655	1720 x 720 x 655
754/550	754/500	754/(+)546/ (S)356/(-)522	754/(+)543/ (S)358/(-)467
-18 to -23	-18 to -23	+3 to +15/0 to +2/ -18 to -23	+3 to +15/0 to +2/ -18 to -23
R404A*	R404A	R404A*	R404A*
220-240/50	220-240/50	220-240/50	220-240/50
545	545	545	545
9,6	10,2	(+)2,2/ (S)4,2/(-)9,6	(+)2,2/ (S)4,2/(-)10,2
124/114	132/122	141/131	147/137

* Also available with refrigerant R290 on request; depending on quantity

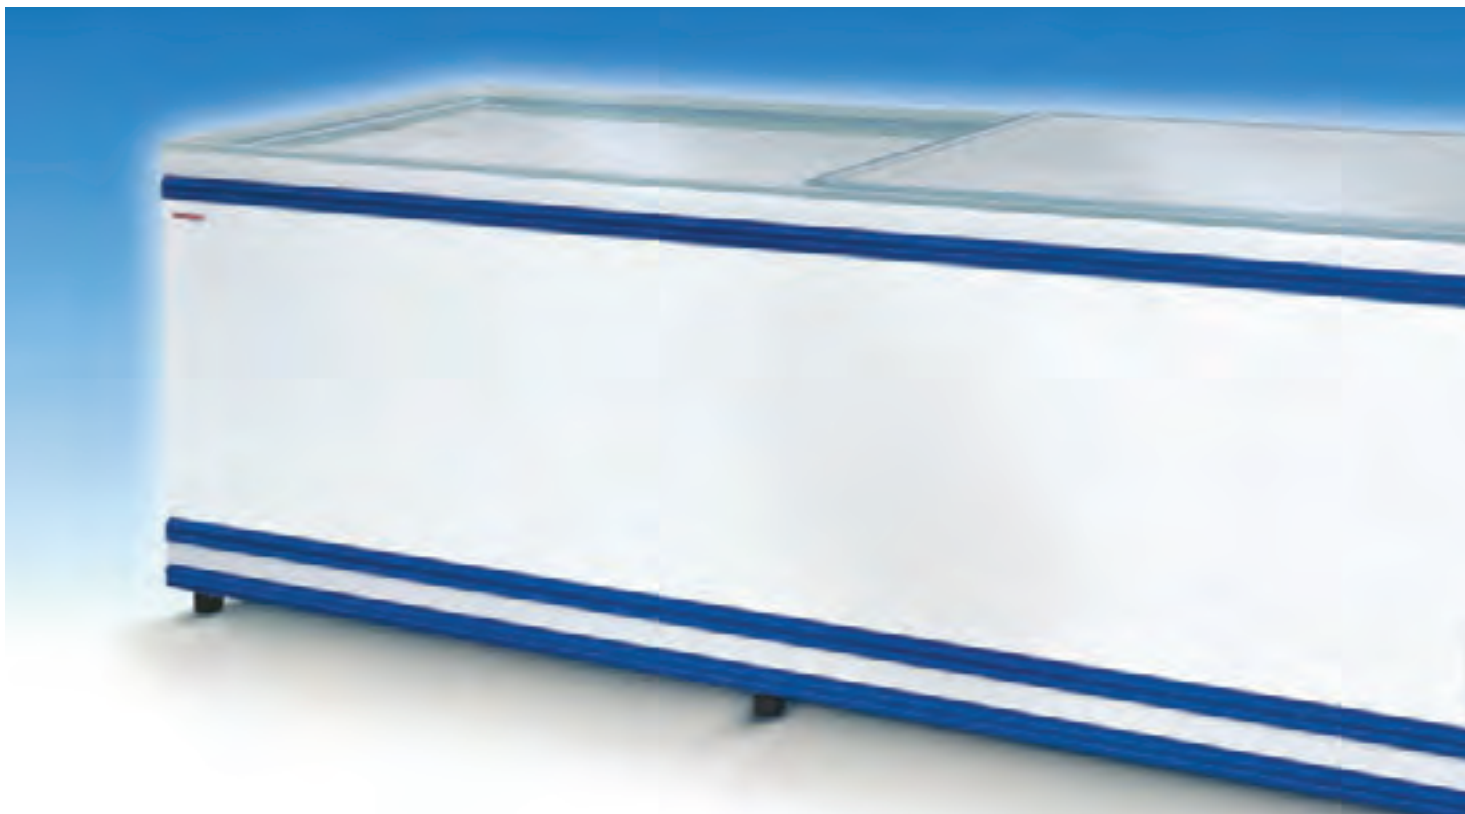**KEY BENEFIT:**

- High energy savings compared with conventional open units
- Constant interior temperature and high power reserves ensure high merchandise quality
- Ready to plug in immediately as it is an integral cabinet
- Low costs for investment and operation
- Maintenance-free
- Improved profitability per square meter
- Intelligent fan motor for more energy efficiency – saves approximately 0,5 kWh daily (optional)
- Provides perfect storage conditions due to high net volume
- Operates silently and gives off low heat emissions

FLEXIBLE LOCATION OPTIONS

- Stand alone unit 
- Line up 
- Can be used as an island 
- Maximizes the use of floor space by use with an end cabinet 
- Can be extended using standard shelving systems

Universal cabinet(U):


Cabinet covers all three temperature ranges of refrigeration +3 °C to +15 °C** / meat and minced meat refrigeration 0°C to +2 °C / freezing –18 °C to –23 °C.

* Preset is fixed at 4 °C – possibility to change to another temperature by a service technician

Model	STANDARD COMPRESSOR WITH REFRIGERANT R404A		
	SALZBURG 83/175 End cabinet	SALZBURG 83/210	SALZBURG 83/250
	(–)	(–)	(–)
External Dimensions (WxDxH) [mm]	1750x800x830	2100x800x830	2500x800x830
Internal Dimensions (WxDxH) [mm]	1620x670x668	1970x670x668	2370x670x668
Volume gross/net [l]	672/575	829/710	1008/865
Inner temperature range [°C]	–18 to –23	–18 to –23	–18 to –23
Refrigerant type	R404A	R404A	R404A
Nominal voltage/frequency [V/Hz]	220–240/50	220–240/50	220–240/50
Nominal power cabinet [W]	400	400	455
Energy consumption (at 25 °C) [kWh/24 h]	7,4	7,9	9,7
Weight gross/net [kg]	117/106	133/121	158/142



● For optional accessories see page 26-35

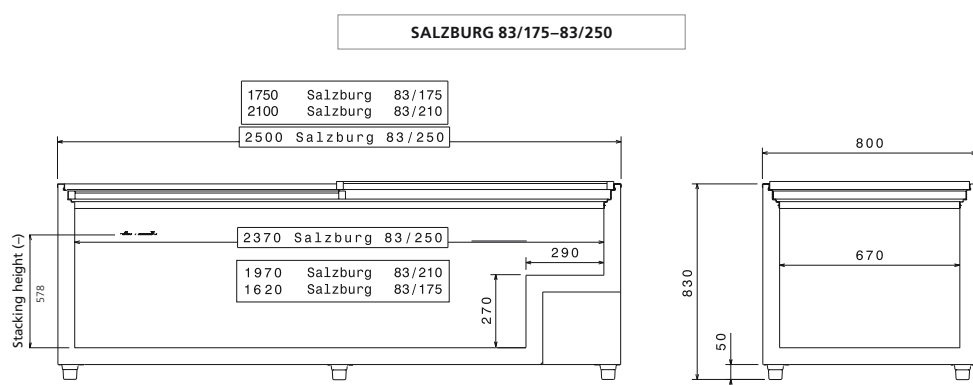

ACCESSORIES RANGE



Kick plate



Cover (flat, top)



Side cover



Cover (high, top)




Lighting unit




Product label




Pricetag holder

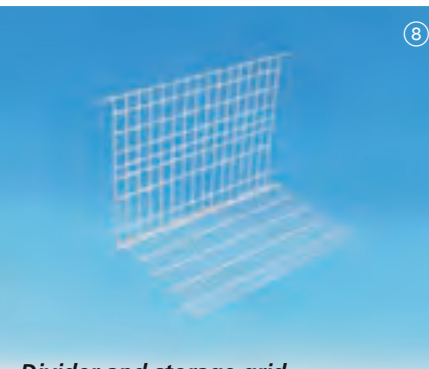

Divider and storage grid

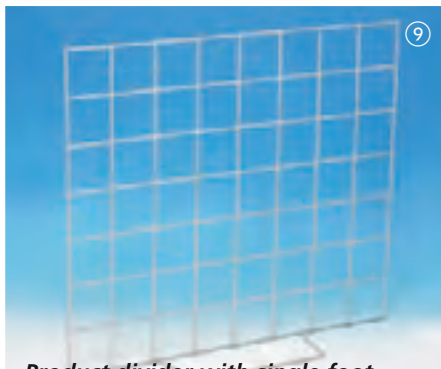


Product divider with single foot

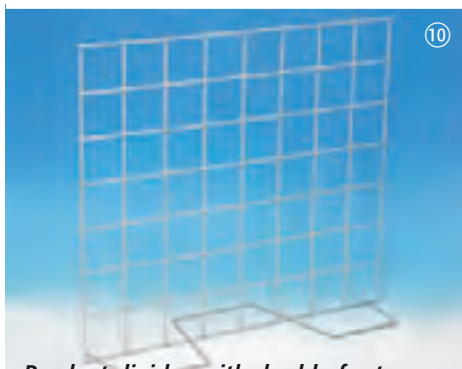

Product divider with double foot



Standing basket

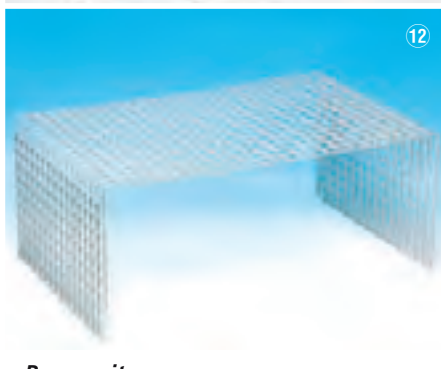

Base unit



Extension feet



Bumpers



Trolley guards

Functionality and well thought-out solutions characterise the AHT accessories system. Variably and individually, we offer the ideal solutions and extensions for all areas of application - from the optimised product presentation up to attractive brandings.



- ① **Kick plate:** prevents cleaning water and dust from dirtying and penetrating under the cabinets
- ② **Cover (flat, top):** for covering the space between cabinets for block installation
- ③ **Side cover:** for covering the side spaces and fastening the cabinets
- ④ **Cover (high, top):** for covering the space between cabinets and for mounting product group signage
- ⑤ **Lighting unit:** for optimum product presentation, illumination of the cabinets and product identification
- ⑥ **Product label:** for precise product descriptions
- ⑦ **Pricetag holder:** for attaching price signs to the cabinet
- ⑧ **Divider and storage grid:** to maximize merchandising opportunities
- ⑨ **Product divider with single foot:** for individual interior arrangement – optimum space structuring – first-class product placement
- ⑩ **Product divider with double foot:** for individual interior arrangement – optimum space structuring – first-class product placement
- ⑪ **Standing basket:** improves product presentation possibilities, interior space organisation, and product access height
- ⑫ **Base unit:** optimises product placement and product access height
- ⑬ **Extension feet:** for optimized product access height
- ⑭ **Bumpers:** used for protection against physical impact from the outside – available in various colours
- ⑮ **Trolley guards:** used for protection against pallet trucks, trolleys and physical impact from the outside

ACCESSORIES RANGE

ATHEN XL

Art-No.	COVER PLATE FLAT	
270460	ATHEN XL 175	Distance 100 mm, white RAL 9003, to be used with art-no. 269292, 282655
286686	ATHEN XL 175	Distance 100 mm, grey RAL 7045, to be used with art-no. 269292, 282655
265406	ATHEN XL 210	Distance 100 mm, white RAL 9003, to be used with art-no. 269292, 282655
282653	ATHEN XL 210	Distance 100 mm, grey RAL 7045, to be used with art-no. 269292, 282655
COVER PLATE HIGH		
292163	ATHEN XL 175	Form D, distance 100 mm, closed at side, white RAL 9003, to be used with art-no. 269292, 282655
292227	ATHEN XL 175	Form D, distance 100 mm, closed at side, grey RAL 7045, to be used with art-no. 269292, 282655
286734	ATHEN XL 175	Form D, distance 100 mm, closed at side, white RAL9003, to be used with art-no. 269292, 282655
292225	ATHEN XL 175	Form D, distance 100 mm, closed at side, grey RAL7045, to be used with art-no. 269292, 282655
LIGHT CANOPIES AND COVERS		
270976	ATHEN XL 175	(LA-A 175) white RAL 9003, to be used with art-no.: 271432, 271031
285598	ATHEN XL 175	(LA-A 175) grey RAL 7035, to be used with art-no.: 271432, 271031
276389	ATHEN XL 207	(LA-A 153) white RAL 9003
278430	ATHEN XL 207	(LA-A 153) grey RAL 7045
285597	ATHEN XL 207	(LA-A 153) grey RAL 7035
269109	ATHEN XL 210	(LA-A 210) white RAL 9003
285599	ATHEN XL 210	(LA-A 210) grey RAL 7035
283802	ATHEN XL 210	(LA-A 210) grey RAL 7045
271432	ATHEN XL 175	(for LAK/LA-A 175) distance 100 mm, white RAL 9003
271438	ATHEN XL 210	(LAK/LA-A 210) distance 100 mm, white RAL 9003
292154	ATHEN XL 210	(LAK/LA-A 210) distance 100 mm, grey RAL 7045
271031	ATHEN XL 175/210	Side cover (2 pcs.), distance 100 mm, white RAL 9003
292156	ATHEN XL 175/210	Side cover (2 pcs.), distance 100 mm, grey RAL 7045
SIDE PANEL FLAT		
269292	ATHEN XL 175/210	(2 pcs.) left and right, distance 100 mm, white RAL 9003
282655	ATHEN XL 175/210	(2 pcs.) left and right, distance 100 mm, grey RAL 7045
269999	ATHEN XL 175/210	left or right, distance 100 mm, white RAL 9003
BUMPERS-SET		
275829	ATHEN XL 175	Wall consists of: 2 x SSL front, grey RAL 7045
273908	ATHEN XL 175	Wall consists of: 2 x SSL front, red RAL 3020
274111	ATHEN XL 175	Wall consists of: 2 x SSL front, silver RAL 9006
271761	ATHEN XL 175/210	sideways, 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill) grey RAL 7045
212858	ATHEN XL 175/210	white RAL 9003
278662	ATHEN XL 175/210	yellow RAL 1021
248689	ATHEN XL 210	Wall consists of: 2 x SSL front, grey RAL 7045
248684	ATHEN XL 210	Wall consists of: 2 x SSL front, blue RAL 5010
247990	ATHEN XL 210	Wall consists of: 2 x SSL front, green RAL 6029
248687	ATHEN XL 210	Wall consists of: 2 x SSL front, yellow RAL 1021
248691	ATHEN XL 210	Wall consists of: 2 x SSL front, red RAL 3020
248693	ATHEN XL 210	Wall consists of: 2 x SSL front, black RAL 9005
248703	ATHEN XL 210	Wall consists of: 2 x SSL front, white RAL 9003
278557	ATHEN XL 207	Set consists of: 4 x side wall, 2 x VW, grey RAL 7045
278555	ATHEN XL 207	Set consists of: 4 x side wall, 2 x VW, red RAL 3020
278554	ATHEN XL 207	Set consists of: 4 x side wall, 2 x VW, blue RAL 5010
278666	ATHEN XL 207	Set consists of: 4 x side wall, 2 x VW, yellow RAL 1021
278556	ATHEN XL 207	Set consists of: 4 x side wall, 2 x VW, silver RAL 9006
GRID SYSTEMS AND DIVIDERS		
269246	ATHEN XL 175/210/207 AD	Grid set, base unit small Athen XL (S) 3 pcs.
269247	ATHEN XL 175/210/207 AD	Grid Set, base unit wide Athen XL (S) 2 pcs.
203679	Athen XL AD u. ECO	Grid Set, basket dividers, 3 pcs.
284640	ATHEN XL 175 AD	Grid Set, (basket dividers flexibe top and bottom)
269246	ATHEN XL 175 AD	Base unit small Athen XL (S) 4 Pcs.
284558	ATHEN XL 175 AD	Base unit Athen XL (S) compressor step 1 Pcs.
284559	ATHEN XL 175 AD	Basket dividers upper Athen XL AD 4 Pcs.
284560	ATHEN XL 175 AD	Basket dividers lower Athen XL AD 4 Pcs.
284642	ATHEN XL 210 AD	Grid set, (basket dividers flexibe top and bottom)
269246	ATHEN XL 210 AD	Base unit small Athen XL (S) 5 Pcs.
284558	ATHEN XL 210 AD	Base unit Athen XL (S) compressor step 1 Pcs.
284559	ATHEN XL 210 AD	Basket dividers upper Athen XL AD 4 Pcs.

284560	ATHEN XL 210 AD	Basket dividers lower Athen XL AD 4 Pcs.
284641	ATHEN XL 207 AD	Grid set, (basket dividers flexibe top and bottom)
269247	ATHEN XL 207 AD	Base unit wide Athen XL (S) 4 Pcs.
284558	ATHEN XL 207 AD	Base unit Athen XL (S) compressor step 1 Pcs.
284559	ATHEN XL 207 AD	Basket dividers upper Athen XL AD 4 Pcs.
284560	ATHEN XL 207 AD	Basket dividers lower Athen XL AD 4 Pcs.
269246	ATHEN XL 175/210/207 (U)	Base unit small
269247	ATHEN XL 175/210/207 (U)	Base unit wide
203679	ATHEN XL 175/210/207 with AD	Divider
269167	ATHEN XL 175/210/207 without AD	Divider, with two stabilizing feet
269285	ATHEN XL 175/210/207 269167	Set 20 Pcs. Divider, With two stabilizing feet (without AD) 269167
KICK PLATES / WATER LISTS		
269863	ATHEN XL 175	Set of kick plates for a block of 2 front, consists of: 2 x kick plate front, white RAL 9003
278682	ATHEN XL 175	Set of kick plates for a block of 2 front, consists of: 2 x kick plate front, grey RAL 7045
278682	ATHEN 207	Kick plate front Set, front and side, grey RAL 7045
269400	ATHEN 207	Kick plate front Set, front and side, white RAL 9003
255811	ATHEN XL 210	Set of kick plates stand alone unit front, is mounted at the feet, consists of: 1 x kick plate front front, white RAL 9003
255709	ATHEN XL 210	Kick plate for a block of 2 front, is mounted at the feet, consists of: 2 x kick plate front, white RAL 9003
276751	ATHEN XL 210	Kick plate for a block of 2 front, is mounted at the feet, consists of: 2 x kick plate front, grey RAL 7045
255812	ATHEN XL 210	Kick plate for a block of 4 front, is mounted at the feet, consists of: 4 x kick plate front, white RAL 9003
278692	ATHEN XL 210	Kick plate for a block of 4 front, is mounted at the feet, consists of: 4 x kick plate front, grey RAL 7045
255813	ATHEN XL 210	Kick plate for a block of 8 front, is mounted at the feet, consists of: 8 x kick plate front 210
269998	ATHEN XL 175/210	Set of kick plates for 1 side wall, consists of: kick plate front (2x) for 1 x side, distance 100 mm, white ral 9003
278693	ATHEN XL 175/210	Set of kick plates for 1 side wall, consists of: kick plate front (2x) for 1 x side, distance 100 mm, grey ral 7045
PRICETAG HOLDERN		
231282	ATHEN XL 175/210/207	Pricetag label, length 210 mm, height 40mm, adhesive
289221	JUMBO 175	Pricetag holder (PA 4), length 1380 mm, adhesive
253180	ATHEN XL 207	Pricetag holder (PA 4), length 1380 mm, adhesive, white RAL 9003
276964	ATHEN XL 207	Pricetag holder (PA 4), length 1380 mm, adhesive, blue RAL 5010
265391	JUMBO 210	Pricetag holder (PA 4), length 1380 mm, adhesive, white RAL 9003
265724	JUMBO 210	Pricetag holder (PA 4), length 1380 mm, adhesive, orange RAL 2003
252229	JUMBO 210	Pricetag holder (PA 2), length 2092 mm, screwed, white RAL 9003
203784	JUMBO 210	Pricetag holder (PA 2), length 2092 mm, screwed, grey RAL 7045
276722	ATHEN XL 207	Pricetag holder (PA 2), length 1380 mm, screwed, white RAL 9003
203782	ATHEN XL 207	Pricetag holder (PA 2), length 1380 mm, screwed, grey RAL 7045
286738	ATHEN XL 207	Pricetag holder (PA 3), length 1300 mm, screwed, white RAL 9003
292229	ATHEN XL 207	Pricetag holder (PA 3), length 1300 mm, screwed, grey RAL 7045
297694	ATHEN XL 207	Pricetag holder (PA 3), length 1300 mm, screwed, grey RAL 7024
298006	ATHEN XL 207	Pricetag holder (PA 3), length 1300 mm, screwed, silver RAL 9006
FIXING BRACKETS AND POSITIONING RAILS		
269289	ATHEN XL 175/210	Fixing plate 100 mm (1 Pcs.)
269846	ATHEN XL 175/210	Positioning plate 100/1750
265545	ATHEN XL 175/210	Positioning plate 100/2100
MISCELLANEOUS		
270431	Terminal resistance Secop	
270437	Bus-connection 15 m Secop	
270430	Bus-connection 3 m Secop	
230898	Terminal resistance for WURM-controller	
230997	BUS-connection 6-pole WURM for cabinets with electronic Wurm-system	
215143	Plug for external warning	
213010	Lubricant stick	

MIAMI

TOP COVER PLATES / AIRCHANNELS		
246743	MIAMI/PARIS 145	Cover plate flat, distance 155 mm, white RAL 9003, to be used with art-No. 245721 white, 274351 grey
296342	MIAMI/PARIS 145	Cover plate flat, distance 155 mm, grey RAL 7045, to be used with art-No. 245721 white, 274351 grey
246743	MIAMI/PARIS 185	Cover plate flat, distance 155 mm, white RAL 9003, cabintes placed back to back, to be used with art-no. 250890
274350	MIAMI/PARIS 210	Cover plate flat, distance 155 mm, grey RAL 7045, to be used with art.Nr. 274351 grey
246702	MIAMI/PARIS 210	Cover plate flat, distance 155 mm, white RAL 9003, to be used with art-No. 274582 (preferred), 245721
274353	MIAMI/PARIS 250	Cover plate flat, distance 155 mm, grey RAL 7045, to be used with art-no. 274351
247812	MIAMI/PARIS 250	Cover plate flat, distance 155 mm, white RAL 9003, to be used with art-no. 274582 (preferred), 245721

ACCESSORIES RANGE

246831	MIAMI/PARIS 145	Cover plate high, distance 155 mm, white RAL 9003, to be used with art-no. 253779
278678	MIAMI/PARIS 210	Cover plate high, Form C, distance 155 mm, (with 8 slots), to be used with art-no. 292288, 297612, white RAL 9003
297610	MIAMI/PARIS 210	Cover plate high, Form C, distance 155 mm, (with 8 slots), to be used with art-no. 292288, 297612, grey RAL 7045
296264	MIAMI/PARIS 250	Cover plate high, Form C, distance 155 mm, to be used with art-no. 292288, 297612, white RAL 9003
292004	MIAMI/PARIS 250	Cover plate high, Form C, distance 155 mm, to be used with art-no. 292288, 297612, grey RAL 7045
LIGHT CANOPIES AND COVERS		
283797	MIAMI/PARIS 145/185	Lighting unit, grey RAL 7045, (LA-A 145)
283802	MIAMI/PARIS 210	Lighting unit, grey RAL 7045, (LA-A 210), to be used with art-no. 253165
288420	MIAMI/PARIS 250	Lighting unit, grey RAL 7045, (LA-A 250)
253165	LAK/LA-A 210	Lighting unit-cover upper, distance 155 mm, white RAL 9003, to be used with art-no. 283802
250157	LAK/LA-A 250	Lighting unit-cover upper, distance 155 mm, white RAL 9003, 2-parts, to be used with art-no. 288420
SIDE COVEREN		
282336	MIAMI/PARIS 145/210/250	Side cover left and right, with LAK/LA-A - distance 155 mm, white RAL 9003
253779	MIAMI/PARIS 145/210/250	Side cover high, left and right (2 pcs.), pentagonal with pricing, distance 155 mm, white RAL 9003, to be used with art-no. 243371
274582	MIAMI/PARIS 145/210/250	Side panel flat left or right (1 pcs.), height 83, distance 155 mm, white RAL 9003, without air slits, preferred option to be used, if there is no lighting unit, to be used with art-no. 246743
245721	MIAMI/PARIS 145/210/250	Side cover left and right, (2 pcs.), height 83, distance 155 mm, with air slits, to be used if there is no lighting unit, to be used with art-no. 246743, white RAL 9003
274351	MIAMI/PARIS 145/210/250	Side cover left and right, (2 pcs.), height 83, distance 155 mm, with air slits, to be used if there is no lighting unit, to be used with art-no. 246743, grey RAL 7045
292288	MIAMI/PARIS 210/250	Side cover high left and right (2 pcs.), Form C, distance 155 mm to be used with art-no. 278678, 297610, white RAL 9003
297612	MIAMI/PARIS 210/250	Side cover high left and right (2 pcs.), Form C, distance 155 mm to be used with art-no. 278678, 297610, grey RAL 7045
BUMPERS		
251637	MIAMI/PARIS 145	Set of bumpers for front wall consists of: 2 x SSL VW, grey RAL 7045
255549	MIAMI/PARIS 145	Set of bumpers for front wall consists of: 2 x SSL VW, white RAL 9003
269545	MIAMI/PARIS 145	Set of bumpers for front wall consists of: 2 x SSL VW, black RAL 9005
269547	MIAMI/PARIS 145	Set of bumpers for front wall consists of: 2 x SSL VW, red RAL 3020
255202	MIAMI/PARIS 145	Set of bumpers for front wall consists of: 2 x SSL VW, green RAL 6029
269551	MIAMI/PARIS 145	Set of bumpers for front wall consists of: 2 x SSL VW, yellow RAL 1021
269543	MIAMI/PARIS 145	Set of bumpers for front wall consists of: 2 x SSL VW, blue RAL 5010
210667	MIAMI 185	Bumpers set, 2 x SSL front, 4 x SSL SW curved, 8 x sheet-metal screw, grey RAL 7045
208916	MIAMI 185	Bumpers set, 2 x SSL front, 4 x SSL SW curved, 8 x sheet-metal screw, blue RAL 5010
208915	MIAMI 185	Bumpers set, 2 x SSL front, 4 x SSL SW curved, 8 x sheet-metal screw, red RAL 3020
248689	MIAMI/PARIS 210	Set of bumpers for front wall consists of: 2 x SSL front, grey RAL 7045
248684	MIAMI/PARIS 210	Set of bumpers for front wall consists of: 2 x SSL front, blue RAL 5010
247990	MIAMI/PARIS 210	Set of bumpers for front wall consists of: 2 x SSL front, green RAL 6029
248687	MIAMI/PARIS 210	Set of bumpers for front wall consists of: 2 x SSL front, yellow RAL 1021
248691	MIAMI/PARIS 210	Set of bumpers for front wall consists of: 2 x SSL front, red RAL 3020
248693	MIAMI/PARIS 210	Set of bumpers for front wall consists of: 2 x SSL front, black RAL 9005
248703	MIAMI/PARIS 210	Set of bumpers for front wall consists of: 2 x SSL front, white RAL 9003
252074	MIAMI/PARIS 250	Set of bumpers for front wall consists of: 2 x SSL front 250, grey RAL 7045
252068	MIAMI/PARIS 250	Set of bumpers for front wall consists of: 2 x SSL front 250, blue RAL 5010
252078	MIAMI/PARIS 250	Set of bumpers for front wall consists of: 2 x SSL front 250, green RAL 6029
252072	MIAMI/PARIS 250	Set of bumpers for front wall consists of: 2 x SSL front 250, yellow RAL 1021
252082	MIAMI/PARIS 250	Set of bumpers for front wall consists of: 2 x SSL front 250, red RAL 3020
252086	MIAMI/PARIS 250	Set of bumpers for front wall consists of: 2 x SSL front 250, black RAL 9005
252090	MIAMI/PARIS 250	Set of bumpers for front wall consists of: 2 x SSL front 250, white RAL 9003
246380	MIAMI/PARIS 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), grey RAL 7045
248123	MIAMI/PARIS 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), blue RAL 5010
247987	MIAMI/PARIS 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), green RAL 6029
248256	MIAMI/PARIS 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), yellow RAL 1021
248127	MIAMI/PARIS 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), red RAL 3020
248264	MIAMI/PARIS 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), black RAL 9005
248707	MIAMI/PARIS 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), white RAL 9003

GRID SYSTEMS AND BASKETS		
209000	MIAMI 145 (U) AD and (-) AD	Grid-set inside consists of: 2 x bottom grid with handle 383 mm - art-no. 265986, 1 x bottom grid with handle 315 mm - art-no. 265987, 2 x divider - art-no. 298160
209038	MIAMI 185 (U) AD u. (-) AD	Grid-set inside consists of 3 x base unit 383 mm - art-no. 200719, 1 x base unit 315 mm - art-no. 200720, 3 x divider art-no. 200718
209015	MIAMI 210 (U) AD and (-) AD	Grid-set inside consists of: 2 x base unit with handle 383 mm - art-no. 265986, 3 x bottom grid with handle 315 mm - art-no. 265987, 3 x divider- art-no. 298160
209023	MIAMI 250 (U) AD and (-) AD	Grid-set inside consists of 3 x bottom grid with handle 383 mm - art-no. 265986, 3 x bottom grid with handle 315 mm - art-no. 265987, 3 x divider - art-no. 298160
298160	MIAMI 145/210/250 (U) AD	Divider 432,5 mm, high
206247	MIAMI 145/210/250 (U) AD	Divider 270 mm, high
209005	MIAMI 145/210/250 AD	Divider 496,5 mm, up to the bottom
200718	MIAMI 185 (U) AD	Divider 432,5 mm high
206248	MIAMI 185 (U) AD	Divider 235 mm high
209098	MIAMI 185 AD	Divider 465 mm, up to the bottom
265987	MIAMI 145/210/250	Bottom grid with handle (U/S) 315 mm, Miami 145: 2 pcs. (265986) and 1 pcs. (265987), Miami 210: 2 pcs. (265986) and 3 pcs. (265987), Miami 250: 3 pcs. (265986) and 3 pcs. (265987)
265986	MIAMI 145/210/250	Bottom grid with handle (U/S) 383 mm, Miami 145: 2 pcs. (265986) and 1 pcs. (265987), Miami 210: 2 pcs. (265986) and 3 pcs. (265987), Miami 250: 3 pcs. (265986) and 3 pcs. (265987)
200720	MIAMI 185	Bottom grid with handle (U/S) 315 mm, fully equipped: 1 x 200720 and 3 x 200719
200719	MIAMI 185	Bottom grid with handle (U/S) 383 mm, fully equipped: 1 x 200720 and 3 x 200719
KICK PLATES / WATER LISTS		
209048	MIAMI 145	Set of kick plates for a block of 2, is mounted at the feet, consists of: 2 x kick plate front front white RAL 9003
203528	MIAMI 185	Set of kick plates for end cabinet, is mounted at the feet - consists of: 1 x kick plate front front with radius - left and right, 2 x kick plate front sideways, white RAL 9003 without air slits
209276	MIAMI 185	Set of kick plates for end cabinet, is mounted at the feet - consists of: 1 x kick plate front front with radius - left and right, 2 x kick plate front sideways, grey RAL 7045 without air slits
209047	MIAMI 210	Set of kick plates, 1 x kick plate front front, white RAL 9003
203529	MIAMI 210	Kick plate front- set for a block of 2, is mounted at the feet, consists of: 2 x kick plate front front, white RAL 9003
209277	MIAMI 210	Kick plate front- set for a block of 2, is mounted at the feet, consists of: 2 x kick plate front front, grey RAL 7045
208973	MIAMI 210	Set of kick plates for a block of 4, is mounted at the feet, consists of: 4 x kick plate front front, white RAL 9003
209278	MIAMI 210	Set of kick plates for a block of 4, is mounted at the feet, consists of: 4 x kick plate front front, grey RAL 7045
208974	MIAMI 210	Set of kick plates for a block of 8, is mounted at the feet, consists of: 8 x kick plate front front, white RAL 9003
209046	MIAMI 250	Set of kick plates, 1 x kick plate front, white RAL 9003
203530	MIAMI 250	Set of kick plates for for a block of 2, is mounted at the feet, consists of: 2 x kick plate front front, white RAL 9003
209279	MIAMI 250	Set of kick plates for for a block of 2, is mounted at the feet, consists of: 2 x kick plate front front, grey RAL 7045
208975	MIAMI 250	Set of kick plates for for a block of 4, is mounted at the feet, consists of: 4 x kick plate front 250 front, white RAL 9003
208976	MIAMI 250	Set of kick plates for for a block of 8, is mounted at the feet, consists of: 8 x kick plate front front, white RAL 9003
203618	MIAMI 145/210/250	Set of kick plates for 1 side wall, consists of: 2 x kick plate front, distance 155 mm, white RAL 9003
209280	MIAMI 145/210/250	Set of kick plates for 1 side wall, consists of: 2 x kick plate front, distance 155 mm, grey RAL 7045
208977	MIAMI 145/210/250	Set of kick plates for 2 end walls of the block, consists of: 4 x kick plate front , distance 155 mm, white RAL 9003
PRICETAG HOLDERN		
231282	MIAMI 145/185/210/250	Pricetag label, transparent, length 210 mm, height 40mm, adhesive
253180	MIAMI/PARIS 145/185	Pricetag holder (PA 4), length 1380 mm, adhesive, white RAL 9003
276964	MIAMI/PARIS 145/185	Pricetag holder (PA 4), length 1380 mm, adhesive, blue RAL 5010
276722	MIAMI/PARIS 185	Pricetag holder (PA 2), length 1380 mm, screwed, white RAL 9003
203782	MIAMI/PARIS 185	Pricetag holder (PA 2), length 1380 mm, screwed, grey RAL 7045
286738	MIAMI/PARIS 185	Pricetag holder (PA 3), length 1300 mm, screwed, white RAL 9003
292229	MIAMI/PARIS 185	Pricetag holder (PA 3), length 1300 mm, screwed, grey RAL 7045
297694	MIAMI/PARIS 185	Pricetag holder (PA 3), length 1300 mm, screwed, grey RAL 7024
298006	MIAMI/PARIS 185	Pricetag holder (PA 3), length 1300 mm, screwed, silver RAL 9006
252229	JUMBO 210	Pricetag holder (PA 2), length 2092 mm, screwed, white RAL 9003
203784	JUMBO 210	Pricetag holder (PA 2), length 2092 mm, screwed, grey RAL 7045
265391	JUMBO 210	Pricetag holder (PA 4), length 2092 mm, adhesive, white RAL9003
278658	JUMBO 250	Pricetag holder (PA 2), length 2492 mm, screwed, white RAL 9003
203786	JUMBO 250	Pricetag holder (PA 2), length 2492 mm, screwed, grey RAL 7045
269342	JUMBO 250	Pricetag holder (PA 4), length 2400 mm, adhesive, white RAL 9003
FIXING BRACKETS / POSITIONING RAILS		
245814	MIAMI 145/210/250	Fixing bracket for distance 155 mm
249463	MIAMI 145/210/250	Fixing bracket for distance 155 mm, with A cutout for shelf-foot
274584	MIAMI/PARIS 185	Fixing bracket for head unit
251569	MIAMI 145/210/250	Positioning plate; LxB 500/155 mm

ACCESSORIES RANGE

228142	MIAMI 210	Positioning plate LxB 2100/155 mm
239727	MIAMI 250	Positioning plate LxB 2500/155 mm
MISCELLANEOUS		
270431	Terminal resistance Secop	
270437	Bus-connection 15 m Secop	
270430	Bus-connection 3 m Secop	
230898	Terminal resistance for WURM-controller	
230997	Bus-connection 3 m, for cabinets with electronic Wurm-controller	
215143	Plug for external warning	
083801	Ice scraper	
213010	Lubricant stick	

PARIS / MIAMI

COVER PLATE FLAT		
246743	PARIS/MIAMI 145	Distance 155 mm, white RAL 9003, to be used with art-no. 245721 white, 274351 grey
296342	PARIS/MIAMI 145	Distance 155 mm, grey RAL 7045, to be used with art-no. 245721 white, 274351 grey
246743	PARIS/MIAMI 185	Distance 155 mm, white RAL 9003, cabinets placed back to back, to be used with art-no. 250890
246702	PARIS/MIAMI 210	Distance 155 mm, white RAL 9003, to be used with art-no. 274582 (preferred), 245721
274350	PARIS/MIAMI 210	Distance 155 mm, grey RAL 7045, to be used with art-no. 274351 grey
247812	PARIS/MIAMI 250	Distance 155 mm, white RAL 9003, to be used with art-no. 274582 (preferred), 245721
274353	PARIS/MIAMI 250	Distance 155 mm, grey RAL 7045, to be used with art-no. 274351
COVEREN UPPER HIGH		
246831	PARIS/MIAMI 145	Distance 155 mm, white RAL 9003, to be used with art-no. 253779
243371	PARIS/MIAMI 210	Distance 155 mm, white RAL 9003, to be used with art-no. 253779
278678	PARIS/MIAMI 210	Form C, distance 155 mm, (with 8 slots), to be used with art-no. 292288, 297612, white RAL 9003
297610	PARIS/MIAMI 210	Form C, distance 155 mm, (with 8 slots), to be used with art-no. 292288, 297612, grey RAL 7045
296264	PARIS/MIAMI 250	Form C, distance 155 mm, to be used with art-no. 292288, 297612, white RAL 9003
292004	PARIS/MIAMI 250	Form C, distance 155 mm, to be used with art-no. 292288, 297612, grey RAL 7045
LIGHT CANOPIES AND COVERS		
283797	PARIS/MIAMI 145/185	Lighting unit LA-A, grey RAL 7045, (LA-A 145)
283802	PARIS/MIAMI 210	Lighting unit LA-A, grey RAL 7045, (LA-A 210), to be used with art-no. 253165
288420	PARIS/MIAMI 250	Lighting unit, grey RAL 7045, (LA-A 250)
253165	LAK/LA-A 210	Lighting unit-cover upper, distance 155 mm, white RAL 9003 to be used with art-no. 283802
250157	LAK/LA-A 250	Lighting unit-cover upper, distance 155 mm, white RAL 9003, 2-parts to be used with art-no. 288420
282336	PARIS 145/210/250	Side cover left and right, with LAK, LA-A - distance 155 mm, white RAL 9003
SIDE COVEREN		
253779	PARIS/MIAMI 145/210/250	Side cover high, left and right (2 pcs.), pentagonal with pricing, distance 155 mm, white RAL9003, to be used with art-no. 243371
274582	PARIS/MIAMI 145/210/250	Side panel flat left or right (1 pcs.), height 83, distance 155mm, white RAL9003, without air slits, preferred option to be used, if no lighting unit; to be used with art-no. 246743
245721	PARIS/MIAMI 145/210/250	Side cover left and right (2 pcs.), height 83, distance 155 mm, with air slits; to be used if there is no lighting unit to be used with art-no. 246743, white RAL9003
274351	PARIS/MIAMI 145/210/250	Side cover left and right (2 pcs.), height 83, distance 155 mm, with air slits; to be used if there is no lighting unit to be used with art-no. 246743, grey RAL7045
292288	PARIS/MIAMI 210/250	Side cover high left and right (2 pcs.), Form C, distance 155 mm, to be used with art-no. 278678,297610, white RAL 9003
297612	PARIS/MIAMI 210/250	Side cover high left and right (2 pcs.), Form C, distance 155 mm, to be used with art-no. 278678,297610, grey RAL 7045
BUMPERS		
251637	PARIS/MIAMI 145	Set of bumpers for front wall consists of: 2 x SSL VW, grey RAL 7045
255549	PARIS/MIAMI 145	Set of bumpers for front wall consists of: 2 x SSL VW, white RAL 9003
269545	PARIS/MIAMI 145	Set of bumpers for front wall consists of: 2 x SSL VW, black RAL 9005
269547	PARIS/MIAMI 145	Set of bumpers for front wall consists of: 2 x SSL VW, red RAL 3020
255202	PARIS/MIAMI 145	Set of bumpers for front wall consists of: 2 x SSL VW, green RAL 6029
269551	PARIS/MIAMI 145	Set of bumpers for front wall consists of: 2 x SSL VW, yellow RAL 1021
269543	PARIS/MIAMI 145	Set of bumpers for front wall consists of: 2 x SSL VW, blue RAL 5010
250986	PARIS 185	Bumpers-set consists of: 2 x SSL front, 4 x SW SSL curved, 5 x sheet metal screw, grey RAL 7045
250971	PARIS 185	Bumpers-set consists of: 2 x SSL front, 4 x SW SSL curved, 5 x sheet metal screw, blue RAL 5010
251007	PARIS 185	Bumpers-set consists of: 2 x SSL front, 4 x SW SSL curved, 5 x sheet metal screw, green RAL 6029
251036	PARIS 185	Bumpers-set consists of: 2 x SSL front, 4 x SW SSL curved, 5 x sheet metal screw, yellow RAL 1021
250995	PARIS 185	Bumpers-set consists of: 2 x SSL front, 4 x SW SSL curved, 5 x sheet metal screw, red RAL 3020
251025	PARIS 185	Bumpers-set consists of: 2 x SSL front, 4 x SW SSL curved, 5 x sheet metal screw, black RAL 9005
251030	PARIS 185	Bumpers-set consists of: 2 x SSL front, 4 x SW SSL curved, 5 x sheet metal screw, white RAL 9003

248689	PARIS/MIAMI 210	Set of bumpers for front wall consists of: 2 x SSL front, grey RAL 7045
248684	PARIS/MIAMI 210	Set of bumpers for front wall consists of: 2 x SSL front, blue RAL 5010
247990	PARIS/MIAMI 210	Set of bumpers for front wall consists of: 2 x SSL front, green RAL 6029
248687	PARIS/MIAMI 210	Set of bumpers for front wall consists of: 2 x SSL front, yellow RAL 1021
248691	PARIS/MIAMI 210	Set of bumpers for front wall consists of: 2 x SSL front, red RAL 3020
248693	PARIS/MIAMI 210	Set of bumpers for front wall consists of: 2 x SSL front, black RAL 9005
248703	PARIS/MIAMI 210	Set of bumpers for front wall consists of: 2 x SSL front, white RAL 9003
252074	PARIS/MIAMI 250	Set of bumpers for front wall consists of: 2 x SSL front, grey RAL 7045
252068	PARIS/MIAMI 250	Set of bumpers for front wall consists of: 2 x SSL front, blue RAL 5010
252078	PARIS/MIAMI 250	Set of bumpers for front wall consists of: 2 x SSL front, green RAL 6029
252072	PARIS/MIAMI 250	Set of bumpers for front wall consists of: 2 x SSL front, yellow RAL 1021
252082	PARIS/MIAMI 250	Set of bumpers for front wall consists of: 2 x SSL front, red RAL 3020
252086	PARIS/MIAMI 250	Set of bumpers for front wall consists of: 2 x SSL front, black RAL 9005
252090	PARIS/MIAMI 250	Set of bumpers for front wall consists of: 2 x SSL front, white RAL 9003
246380	PARIS/MIAMI 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), grey RAL 7045
248123	PARIS/MIAMI 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), blue RAL 5010
247987	PARIS/MIAMI 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), green RAL 6029
248256	PARIS/MIAMI 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), yellow RAL 1021
248127	PARIS/MIAMI 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), red RAL 3020
248264	PARIS/MIAMI 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), black RAL 9005
248707	PARIS/MIAMI 145/210/250	Set of bumpers for side wall for a block, consists of: 2 x 2 SSL for left side wall, 2 x 1 SSL for right side wall (only 1, because of the airgrill), white RAL 9003
GRID SYSTEMS AND BASKETS		
269437	PARIS 145/185/210 AD	Grid set (standard): 249352 base unit Paris (S) small 313 mm 3 pcs., 249353 base unit Paris (S) wide 390 mm 2 pcs., 274864 basket dividers Paris (U) AD 3 pcs.
269439	PARIS 250 AD	Grid set (standard): 249352 base unit Paris (S) small 313 mm 3 pcs., 249353 base unit Paris (S) wide 390 mm 3 pcs., 274864 basket dividers Paris (U) AD 4 pcs.
249352	PARIS	Base unit small 313 mm, separately
249353	PARIS	Base unit wide 390 mm, separately
275037	PARIS 145 (U) AD	Grid set (with handles): 265986 bottom grid with handle Paris (U/S) 383 mm 2 pcs., 265987 bottom grid with handle Paris (U/S) 315 mm, 1 pcs., 274864 basket dividers Paris (U) AD 2 pcs.
274847	PARIS 185 (U) AD	Grid set (with handles): 265986 bottom grid with handle Paris (U/S) 383 mm 3 pcs., 265987 bottom grid with handle Paris (U/S) 315 mm 1 pcs., 274864 basket dividers Paris (U) AD 3 pcs.
274848	PARIS 210 (U) AD	Grid set (with handles): 265986 bottom grid with handle Paris (U/S) 383 mm 2 pcs., 265987 bottom grid with handle Paris (U/S) 315 mm 3 pcs., 274864 basket dividers Paris (U) AD 3 pcs.
274849	PARIS 250 (U) AD	Grid Set with handles: 265986 bottom grid with handle Paris (U/S) 383 mm 3 pcs., 265987 bottom grid with handle Paris (U/S) 315 mm 3 pcs., 274864 basket dividers Paris (U) AD 3 pcs.
246667	PARIS	Basket - distance 25 mm: PARIS 145 - 3 pcs., PARIS 185 - 5 pcs., PARIS 210 - 6 pcs., PARIS 250 - 7 pcs., to be used with art-no.: 250156 basket dividers
246668	PARIS	Basket - distance 40 mm: PARIS 145 - 3 pcs., PARIS 185 - 5 pcs., PARIS 210 - 6 pcs., PARIS 250 - 7 pcs., to be used with art-no.: 250156 basket dividers
269149	PARIS 145/185/210/250	Basket - distance 25 mm, 1 x per cabinet - to use on compressor compartment, no divider available
246274	PARIS	Base unit high 270 mm: PARIS 145: 2 pcs., PARIS 185: 3 pcs., PARIS 210: 4 Pcs., PARIS 250: 5 Pcs.
246275	PARIS	Base unit low 160 mm: PARIS 145: 2 pcs., PARIS 185: 3 pcs., PARIS 210: 4 Pcs., PARIS 250: 5 Pcs.
250156	PARIS 145/185/210/250	Divider for basket, to be used with art-no.: 246667, 246668
251486	PARIS 145/185/210/250	Product divider with double foot
251413	PARIS 145/185/210/250	Product divider with single foot (for compressor step)
274864	PARIS 145/185/210/250	Divider PARIS AD
KICK PLATES / WATER LISTS (STANDARD, W/O EXTENSION FEET)		
274079	Set of kick plates for a block of 2 for PARIS 145 is mounted at the feet, consists of: 2 x kick plate front front, white RAL 9003 with air slits	
276772	Set of kick plates for a block of 2 for PARIS 145 is mounted at the feet, consists of: 2 x kick plate front front, grey RAL 7045 with air slits	
278535	Set of kick plates for a block of 2 for PARIS 145 is mounted at the feet, consists of: 2 x kick plate front front, black RAL 9005 with air slits	
209048	Set of kick plates for a block of 2 for PARIS 145 is mounted at the feet, consists of: 2 x kick plate front front, white RAL9003 without air slits, preferred option	
255635	Set of kick plates for end cabinet PARIS 185 is mounted at the feet, consists of: 1 x kick plate front front with radius - left and right, 2 x kick plate front sideways, white RAL9003 with air slits	
276756	Set of kick plates for end cabinet PARIS 185 is mounted at the feet, consists of: 1 x kick plate front front with radius - left and right, 2 x kick plate front sideways, grey RAL7045 with air slits	

ACCESSORIES RANGE

210670	Set of kick plates for end cabinet PARIS 185 is mounted at the feet, consists of: 1 x kick plate front front with radius - left and right, 2 x kick plate front sideways, white RAL 9003 without air slits, preferred option	
210671	Set of kick plates for end cabinet PARIS 185 is mounted at the feet, consists of: 1 x kick plate front front with radius - left and right, 2 x kick plate front sideways, grey RAL 7045 without air slits, preferred option	
255811	PARIS 210	Set of kick plates stand alone unit front, is mounted at the feet, consists of: 1 x kick plate front front, white RAL 9003 with air slits
209047	PARIS 210	Set of kick plates stand alone unit front, is mounted at the feet, consists of: 1 x kick plate front front, white RAL 9003 without air slits, preferred option
255709	PARIS 210	Set of kick plates for a block of 2 cabinets, is mounted at the feet, consists of: 2 x kick plate front front, white RAL9003 with air slits
276751	PARIS 210	Kick plate for a block of 2 front, is mounted at the feet, consists of: 2 x kick plate front front, grey RAL7045 with air slits
203529	PARIS 210	Kick plate for a block of 2 front, is mounted at the feet, consists of: 2 x kick plate front front, white RAL9003 without air slits, preferred option
209277	PARIS 210	Set of kick plates for a block of 2 cabinets, is mounted at the feet, consists of: 2 x kick plate front front, grey RAL7045 without air slits, preferred option
255812	PARIS 210	Kick plate block of 4 front, is mounted at the feet, consists of: 4 x kick plate front front, white RAL9003 with air slits
278692	PARIS 210	Kick plate block of 4 front, is mounted at the feet, consists of: 4 x kick plate front front, grey RAL7045 with air slits
208973	PARIS 210	Kick plate block of 4 front, is mounted at the feet, consists of: 4 x kick plate front front, white RAL9003 without air slits, preferred option
209278	PARIS 210	Kick plate block of 4 front, is mounted at the feet, consists of: 4 x kick plate front front, grey RAL7045 without air slits, preferred option
255813	PARIS 210	Kick plate block of 8 front, is mounted at the feet, consists of: 8 x kick plate front front, white RAL9003 with air slits
208974	PARIS 210	Kick plate block of 8 front, is mounted at the feet, consists of: 8 x kick plate front front, white RAL9003 without air slits, preferred option
255808	PARIS 250	Kick plate front for stand alone unit front, is mounted at the feet, consists of: 1 x kick plate front front, white RAL9003 with air slits
209046	PARIS 250	Kick plate front for stand alone unit front, is mounted at the feet, consists of: 1 x kick plate front front, white RAL9003 without air slits, preferred option
253663	PARIS 250	Set of kick plates for block of 2, is mounted at the feet, consists of: 2 x kick plate front 250 front, white RAL9003 with air slits
276750	PARIS 250	Set of kick plates for block of 2, is mounted at the feet, consists of: 2 x kick plate front 250 front, grey RAL7045 with air slits
203530	PARIS 250	Set of kick plates for block of 2, is mounted at the feet, consists of: 2 x kick plate front 250 front, white RAL9003 without air slits, preferred option
209279	PARIS 250	Set of kick plates for block of 2, is mounted at the feet, consists of: 2 x kick plate front 250 front, grey RAL 7045 without air slits, preferred option
255809	PARIS 250	Set of kick plates for block of 4, is mounted at the feet, consists of: 4 x kick plate front 250 front, white RAL9003 with air slits
208975	PARIS 250	Set of kick plates for block of 4, is mounted at the feet, consists of: 4 x kick plate front 250 front, white RAL9003 without air slits, preferred option
255810	PARIS 250	Set of kick plates for block of 8, is mounted at the feet, consists of: 8 x kick plate front 250 front, white RAL9003 with air slits
208976	PARIS 250	Set of kick plates for block of 8, is mounted at the feet, consists of: 8 x kick plate front 250 front, white RAL9003 without air slits, preferred option
255732	PARIS 145/210/250	Set of kick plates for 1 side wall, white RAL 9003 with air slits
203618	PARIS 145/210/250	Set of kick plates for 1 side wall, white RAL 9003 without air slits, preferred option
209280	PARIS 145/210/250	Set of kick plates for 1 side wall, grey RAL 7045 without air slits, preferred option
265958	PARIS 145/210/250	Set of kick plates for 2 end walls of the block, consists of: 4 x VW, white RAL 9003 with air slits
276269	PARIS 145/210/250	Set of kick plates for 2 end walls of the block, consists of: 4 x VW, grey RAL 7045 with air slits
208977	PARIS 145/210/250	Set of kick plates for 2 end walls of the block, consists of: 4 x VW, white RAL 9003
PRICETAG HOLDER		
231282	PARIS 145/185/210/250	Pricetag label, transparent, length 210 mm, height 40mm, adhesive
253180	PARIS/MIAMI 145/185	Pricetag holder (PA 4), length 1380 mm, adhesive, white RAL 9003
276964	PARIS/MIAMI 145/185	Pricetag holder (PA 4), length 1380 mm, adhesive, blue RAL 5010
276722	PARIS/MIAMI 185	Pricetag holder (PA 2), length 1380 mm, screwed, white RAL 9003
203782	PARIS/MIAMI 185	Pricetag holder (PA 2), length 1380 mm, screwed, grey RAL 7045
286738	PARIS/MIAMI 185	Pricetag holder (PA 3), length 1300 mm, screwed, white RAL 9003
292229	PARIS/MIAMI 185	Pricetag holder (PA 3), length 1300 mm, screwed, grey RAL 7045
297694	PARIS/MIAMI 185	Pricetag holder (PA 3), length 1300 mm, screwed, grey RAL 7024
298006	PARIS/MIAMI 185	Pricetag holder (PA 3), length 1300 mm, screwed, silver RAL 9006
252229	JUMBO 210	Pricetag holder (PA 2), length 2092 mm, screwed, white RAL 9003
203784	JUMBO 210	Pricetag holder (PA 2), length 2092 mm, screwed, grey RAL 7045
265391	JUMBO 210	Pricetag holder (PA 4), length 2092 mm, adhesive, white RAL 9003

278658	JUMBO 250	Pricetag holder (PA 2), length 2492 mm, screwed, white RAL 9003
203786	JUMBO 250	Pricetag holder (PA 2), length 2492 mm, screwed, grey RAL 7045
269342	JUMBO 250	Pricetag holder (PA 4), length 2400 mm, adhesive, white RAL 9003
FIXING BRACKETS / POSITIONING RAILS		
245814	PARIS 145/210/250	Fixing bracket for distance 155 mm
249463	PARIS 145/210/250	Fixing bracket for distance 155 mm, with A cutout for shelf-foot
274584	PARIS/MIAMI 185	Fixing bracket for head unit
251569	PARIS 145/210/250	Positioning plate LxB 500/155 mm
228142	PARIS 210	Positioning plate LxB 2100/155 mm
239727	PARIS 250	Positioning plate LxB 2500/155 mm
MISCELLANEOUS		
270431	Terminal resistance Secop	
270437	Bus-connection 15 m Secop	
270430	Bus-connection 3 m Secop	
230898	Terminal resistance for WURM-controller	
230997	BUS-connection 6-pole for cabinets with electronic Wurm-system	
215143	Plug for external warning	
083801	Ice scraper	
213010	Lubricant stick	

MANHATTAN

BUMPERS		
212860	Bumpers-set 210 consists of: 2 x front wall, 2 x back wall, 3 x side wall, grey RAL 7045	
209120	Bumpers-set 210 consists of: 2 x front wall, 2 x back wall, 3 x side wall, blue RAL 5010	
213236	Bumpers-set 210 consists of: 2 x front wall, 2 x back wall, 3 x side wall, red RAL 3020	
238063	Bumpers-set 210 consists of: 2 x front wall, 2 x back wall, 3 x side wall, yellow RAL 1021	
238056	Bumpers-set 210 consists of: 2 x front wall, 2 x back wall, 3 x side wall, green RAL 6029	
200835	Basket dividers	
269422	MANHATTAN 175/210 AD	(Standard) Grid set
269246	MANHATTAN	Base unit small 3 pcs.
269247	MANHATTAN	Base unit wide 2 pcs.
203679	MANHATTAN	Basket dividers AD 3 Stl.
269246	Base unit small, fully equipped: 3 x 269246, 2 x 269247 (M210), 1x 269246, 3x 269247 (M175)	
269247	Base unit wide, fully equipped: 3 x 269246, 2 x 269247 (M210), 1x 269246, 3x 269247 (M175)	
KICK PLATE		
201489	Kick plate-Set 210, consists of: 1 x VW, 1 x RW, 2 x SW, white RAL 9003	
PRICETAG HOLDER		
200865	Price tag label 940 mm long	
214840	Price tag holder Set, 960 x 70 mm, 3 pcs. pro set	
MISCELLANEOUS		
300042	Set of casters for Manhattan 210 incl. screws	

MALTA

MALTA		
BUMPERS		
297524	Bumpers-Set for MALTA 145, consists of: 1 x front wall, 1 x back wall, 2 x side wall, grey RAL 7045	
265840	Bumpers-Set for MALTA 185, consists of: 1 x front wall, 1 x back wall, 2 x side wall, grey RAL 7045	
270550	Bumpers-Set for MALTA 185, consists of: 1 x front wall, 1 x back wall, 2 x side wall, blue RAL 5010	
253577	Bumpers-Set for MALTA 185, consists of: 1 x front wall, 1 x back wall, 2 x side wall, yellow RAL 1021	
270551	Bumpers-Set for MALTA 185, consists of: 1 x front wall, 1 x back wall, 2 x side wall, green RAL 6029	
274643	Bumpers-Set for MALTA 185, consists of: 1 x front wall, 1 x back wall, 2 x side wall, red RAL 3020	
269657	Bumpers-Set for MALTA 185, consists of: 1 x front wall, 1 x back wall, 2 x side wall, black RAL 9005	
KICK PLATE		
278637	MALTA 145	Kick plate-set, with holes, type A2, consists of: 1 x VW, 1 x RW, 2 x SW, white RAL 9003
211547	MALTA 145	Kick plate-set, without holes, type A4, consists of: 1 x VW, 1 x RW, 2 x SW, white RAL 9003
255106	MALTA 185	Kick plate-set, with holes, type A2, consists of: 1 x VW, 1 x RW, 2 x SW, white RAL 9003,
276763	MALTA 185	Kick plate-set, with holes, type A2, consists of: 1 x VW, 1 x RW, 2 x SW, grey RAL 7045
211570	MALTA 185	Kick plate-set, without holes, type A4, consists of: 1 x VW, 1 x RW, 2 x SW, white RAL 9003
278526	MALTA 185	Kick plate-set "high", with holes, type A2 / H71, consists of: 1 x VW, 1 x RW, 2 x SW, white RAL 9003

ACCESSORIES RANGE

SALZBURG

COVER PLATE FLAT		
247769	SALZBURG 175	Distance 155 mm, white RAL 9003, to be used with art-no. 245721,274351
296338	SALZBURG 175	Distance 155 mm, grey RAL 7045, to be used with art-no. 245721,274351
246702	JUMBO 210	Distance 155 mm, white RAL 9003, to be used with art-no. 274582 (preferred), 245721
274350	JUMBO 210	Distance 155 mm, grey RAL 7045, to be used with art-no. 274351 grey
247812	JUMBO 250	Distance 155 mm, white RAL 9003, to be used with art-no. 274582 (preferred), 245721
274353	JUMBO 250	Distance 155 mm, grey RAL 7045, to be used with art-no. 274351
LIGHT CANOPIES AND COVERS		
229912	SALZBURG 175 (LAK 175)	Lighting unit
229892	JUMBO 210 (LAK 210)	Lighting unit
232132	JUMBO 250 (LAK 250)	Lighting unit
255238	LAK 175	Cover, distance 155 mm, white RAL 9003, to be used with art-no. 229912, 230351
253165	LAK 210	Cover, distance 155 mm, white RAL 9003, to be used with art-no. 229892, 230351
250157	LAK 250	Cover, distance 155 mm, white RAL 9003, to be used with art-no. 232132, 230351
SIDE COVEREN		
230351	Side cover for LAK (1 Pcs.)	Height x width = 830 x 155 mm
245721	Side panel flat left and right (2 pcs.), height 83, distance 155 mm, with air slits, to be used if there is no lighting unit, white RAL 9003, to be used with art-no. 246702, 274350	
274351	Side panel flat left and right (2 pcs.), height 83, distance 155 mm, with air slits, to be used if there is no lighting unit, grey RAL 7045, to be used with art-no. 246702, 274350	
BUMPERS		
246788	SALZBURG 175	Set of bumpers for back wall, consists of: 3 x SSL back, grey RAL 7045
246773	SALZBURG 175	Set of bumpers for back wall, consists of: 3 x SSL back, blue RAL 5010
246783	SALZBURG 175	Set of bumpers for back wall, consists of: 3 x SSL back, green RAL 6029
246778	SALZBURG 175	Set of bumpers for back wall, consists of: 3 x SSL back, yellow RAL 1021
246768	SALZBURG 175	Set of bumpers for back wall, consists of: 3 x SSL back, red RAL 3020
246755	SALZBURG 175	Set of bumpers for back wall, consists of: 3 x SSL back, black RAL9005
246913	SALZBURG 175	Set of bumpers for back wall, consists of: 3 x SSL back, white RAL 9003
246786	SALZBURG 175	Set of bumpers for front wall, consists of: 3 x SSL front, grey RAL 7045
246771	SALZBURG 175	Set of bumpers for front wall, consists of: 3 x SSL front, blue RAL 5010
246781	SALZBURG 175	Set of bumpers for front wall, consists of: 3 x SSL front, green RAL 6029
246776	SALZBURG 175	Set of bumpers for front wall, consists of: 3 x SSL front, yellow RAL 1021
246766	SALZBURG 175	Set of bumpers for front wall, consists of: 3 x SSL front, red RAL 3020
246753	SALZBURG 175	Set of bumpers for front wall, consists of: 3 x SSL front, black RAL 9005
246912	SALZBURG 175	Set of bumpers for front wall, consists of: 3 x SSL front, white RAL 9003
246789	SALZBURG 210	Set of bumpers for back wall, consists of: 3 x SSL back, grey RAL 7045
246774	SALZBURG 210	Set of bumpers for back wall, consists of: 3 x SSL back, blue RAL 5010
246784	SALZBURG 210	Set of bumpers for back wall, consists of: 3 x SSL back, green RAL 6029
246779	SALZBURG 210	Set of bumpers for back wall, consists of: 3 x SSL back, yellow RAL 1021
246769	SALZBURG 210	Set of bumpers for back wall, consists of: 3 x SSL back, red RAL 3020
246756	SALZBURG 210	Set of bumpers for back wall, consists of: 3 x SSL back, black RAL 9005
246903	SALZBURG 210	Set of bumpers for back wall, consists of: 3 x SSL back, white RAL 9003
246787	SALZBURG 210	Set of bumpers for front wall, consists of: 3 x SSL front, grey RAL 7045
246772	SALZBURG 210	Set of bumpers for front wall, consists of: 3 x SSL front, blue RAL 5010
246782	SALZBURG 210	Set of bumpers for front wall, consists of: 3 x SSL front, green RAL 6029
246777	SALZBURG 210	Set of bumpers for front wall, consists of: 3 x SSL front, yellow RAL 1021
246767	SALZBURG 210	Set of bumpers for front wall, consists of: 3 x SSL front, red RAL 3020
246754	SALZBURG 210	Set of bumpers for front wall, consists of: 3 x SSL front, black RAL9005
246902	SALZBURG 210	Set of bumpers for front wall, consists of: 3 x SSL front, white RAL 9003
246842	SALZBURG 250	Set of bumpers for back wall, consists of: 3 x SSL back wall, black RAL9005
246844	SALZBURG 250	Set of bumpers for back wall, consists of: 3 x SSL back wall, red RAL 3020
246846	SALZBURG 250	Set of bumpers for back wall, consists of: 3 x SSL back wall, blue RAL 5010
247756	SALZBURG 250	Set of bumpers for back wall, consists of: 3 x SSL back wall, yellow RAL 1021
246848	SALZBURG 250	Set of bumpers for back wall, consists of: 3 x SSL back wall, grey RAL 7045
251376	SALZBURG 250	Set of bumpers for back wall, consists of: 3 x SSL back wall, white RAL 9003
246841	SALZBURG 250	Set of bumpers for front wall, consists of: 3 x SSL front wall, black RAL9005
246843	SALZBURG 250	Set of bumpers for front wall, consists of: 3 x SSL front wall, red RAL 3020
246845	SALZBURG 250	Set of bumpers for front wall, consists of: 3 x SSL front wall, blue RAL 5010
247755	SALZBURG 250	Set of bumpers for front wall, consists of: 3 x SSL front wall, yellow RAL 1021
246847	SALZBURG 250	Set of bumpers for front wall, consists of: 3 x SSL front wall, grey RAL 7045
251378	SALZBURG 250	Set of bumpers for front wall, consists of: 3 x SSL front wall, white RAL 9003

255004	SALZBURG 250	Set of bumpers for front wall, consists of: 3 x ssl front wall, green RAL 6029
246790	SALZBURG	Set of bumpers for side wall, consists of: 3 x SSL sideways left and right, grey RAL 7045
246775	SALZBURG	Set of bumpers for side wall, consists of: 3 x SSL sideways left and right, blue RAL 5010
246785	SALZBURG	Set of bumpers for side wall, consists of: 3 x SSL sideways left and right, green RAL 6029
246780	SALZBURG	Set of bumpers for side wall, consists of: 3 x SSL sideways left and right, yellow RAL 1021
246770	SALZBURG	Set of bumpers for side wall, consists of: 3 x SSL sideways left and right, red RAL 3020
246757	SALZBURG	Set of bumpers for side wall, consists of: 3 x SSL sideways left and right, black RAL 9005
246904	SALZBURG	Set of bumpers for side wall, consists of: 3 x SSL sideways left and right, white RAL 9003
GRID SYSTEMS AND DIVIDERS		
216820	Wire Basket EKJ 26	to hang in, Salzburg 175 (6 pcs.), Salzburg 210 (7 pcs.), Salzburg 250 (9 pcs.), to be used with basket dividers 216822
273076	Standing basket 25 mm	Salzburg 175 (6 pcs.), Salzburg 210 (7 pcs.), Salzburg 250 (9 pcs.), to be used with basket dividers 250156
217952	Base unit low - height 160 mm	Salzburg 175 (3 pcs.), Salzburg 210 (4 pcs.), Salzburg 250 (5 pcs.)
216502	Base unit high - height 270 mm	Salzburg 175 (3 pcs.), Salzburg 210 (4 pcs.), Salzburg 250 (5 pcs.)
250156	Basket dividers	for standing basket, to be used with art-no.: 273076
216822	Basket dividers	for wire basket EKJ 26 to be used with art-no.: 216820
251486	Divider - Double foot	Silver RAL 9006, height 830 mm
251413	Divider - Single foot	Divider silver RAL 9006, height 830 mm
WATER LISTS/KICK PLATES		
252348	SALZBURG 175	Set of kick plates for a block of 2 front, consists of: 2 x kick plate front
255709	SALZBURG 210	Kick plate front for a block of 2, consists of: 2 x kick plate front
252251	SALZBURG 250	Set of kick plates for a block of 2, consists of: 2 x kick plate front 250
252353	SALZBURG 175/210/250	Set of kick plates for side wall, consists of: 2 x kick plate front side wall left and right
252441	SALZBURG 175/210/250	Set of kick plates for 2 side walls for an island, inkl. distance 155 mm, consists of: 2 x kick plate front for side
FIXING PLATES AND RAILS		
242698	Fixing plate	Distance 155 mm
253168	Fixierplatte I	for outside
253171	Fixierplatte II	(80/155) for inside
251569	SALZBURG 175/210/250	Positioning plate, L x B 500/155 mm
228143	SALZBURG 175	Positioning plate, L x B = 1750 x 155 mm
228142	SALZBURG 210	Positioning plate, L x B = 2100 mm x 155 mm
239727	SALZBURG 250	Positioning plate, L x B 2500/155 mm
MISCELLANEOUS		
231282	Pricetag holder, transparent, length 210 mm, height 40 mm, adhesive	
229574	Clip-on bolt (2 per packaging) for LAK	
213010	Lubricant stick	

SHOWCASE DISPLAY FREEZERS WITH CURVED GLASS SLIDING LIDS



KEY BENEFIT:


- Reinforced insulation (72 mm) for reserve refrigeration and low energy consumption
- One-piece plastic frame
- Robust double castors
- Adjustable thermostat
- External thermometer

OPTIONS

- Illuminated top panel
- Internal light
- Baskets
- Dividers
- Lock
- Inside thermometer
- Lot size dependent: LED interior light, customer-specific design: stickers, frame color etc.



Modern design with rounded corners

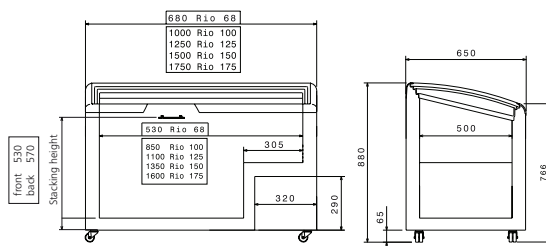

Standard basket capacity (optional):

RIO S 68 G	2
RIO S 100 G	3
RIO S 125 G	4
RIO S 150 G	5
RIO S 175 G	6

	External Dimensions W x D x H mm	Internal Dimensions W x D x H mm	Capacity (Net/Gross Volume)	Temperature Range °C	Refrigerant Type	Rated Output incl. internal light W	Weight Net/Gross kg
RIO S 68 G	680 x 650 x v766/h880	530 x 500 x v610/h720	102 / 132	-14 to -23	R290	280	49/53
RIO S 100 G	1000 x 650 x v766/h880	850 x 500 x v610/h720	190/238	-14 to -23	R290	320	59/63
RIO S 125 G	1250 x 650 x v766/h880	1100 x 500 x v610/h720	258/322	-14 to -23	R290	340	66/71
RIO S 150 G	1500 x 650 x v766/h880	1350 x 500 x v610/h720	327/405	-14 to -23	R290	360	74/79
RIO S 175 G	1750 x 650 x v766/h880	1600 x 500 x v610/h720	396/488	-14 to -23	R290	410	81/87

Also available with refrigerant R404A on request.

SHOWCASE DISPLAY FREEZERS WITH FLAT GLASS SLIDING LIDS



KEY BENEFIT:


- Reinforced insulation (72 mm) for reserve refrigeration and low energy consumption
- One-piece plastic frame
- Robust double castors
- Adjustable thermostat
- External thermometer

OPTIONS

- Illuminated top panel
- Baskets
- Dividers
- Lock
- Inside thermometer
- Lot size dependent: LED interior light, customer-specific design: stickers, frame color etc.



Modern design with rounded corners

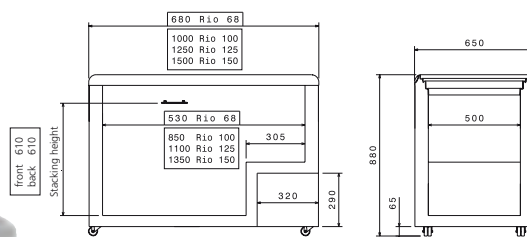

Standard basket capacity (optional):

RIO H 68 G	2
RIO H 100 G	3
RIO H 125 G	4
RIO H 150 G	5

	External Dimensions W x D x H mm	Internal Dimensions W x D x H mm	Capacity (Net/Gross Volume)	Temperature Range °C	Refrigerant Type	Rated Output W	Weight Net/Gross kg
RIO H 68 G	680 x 650 x 880	530 x 500 x 720	117/147	-14 to -23	R290	240	51/55
RIO H 100 G	1000 x 650 x 880	850 x 500 x 720	215/262	-14 to -23	R290	240	63/67
RIO H 125 G	1250 x 650 x 880	1100 x 500 x 720	291/352	-14 to -23	R290	280	71/76
RIO H 150 G	1500 x 650 x 880	1350 x 500 x 720	367/442	-14 to -23	R290	300	79/84

Also available with refrigerant R404A on request.

SHOWCASE DISPLAY FREEZERS WITH FLAT SOLID SLIDING LIDS






KEY BENEFIT:

- Reinforced insulation (72 mm) for reserve refrigeration and low energy consumption
- One-piece plastic frame
- Robust double castors
- Adjustable thermostat
- External thermometer

OPTIONS

- Illuminated top panel
- Baskets
- Dividers
- Lock
- Inside thermometer
- Lot size dependent: LED interior light, customer-specific design: stickers, frame color etc.

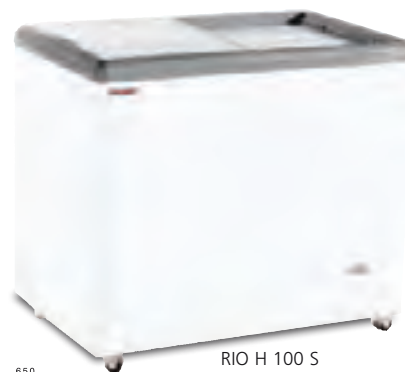

RIO H 100 S

Modern design with rounded corners

Standard basket capacity (optional)

RIO H 68 S	2
RIO H 100 S	3
RIO H 125 S	4
RIO H 150 S	5

	External Dimensions W x D x H mm	Internal Dimensions W x D x H mm	Capacity (Net/Gross Volume)	Temperature Range °C	Refrigerant Type	Rated Output W	Weight Net/Gross kg
RIO H 68 S	680 x 650 x 880	530 x 500 x 700	123 / 141	-14 to -23	R290	240	50 / 54
RIO H 100 S	1000 x 650 x 880	850 x 500 x 700	224 / 253	-14 to -23	R290	240	61 / 65
RIO H 125 S	1250 x 650 x 880	1100 x 500 x 700	302 / 341	-14 to -23	R290	280	69 / 74
RIO H 150 S	1500 x 650 x 880	1350 x 500 x 700	381 / 428	-14 to -23	R290	300	76 / 81

Also available with refrigerant R404A on request.

SHOWCASE DISPLAY FREEZERS WITH FLAT GLASS SLIDING LIDS FOR SCOOPING ICE CREAM



KEY BENEFIT:



- Reinforced insulation (72 mm) for reserve refrigeration and low energy consumption
- One-piece plastic frame
- Robust double castors
- Adjustable thermostat
- External thermometer
- Canopy (for classic scooping ice cream sales)
- Flat glass sliding lids

OPTIONS

- Inside thermometer
- Wire basket for ice cream bins
- Lock
- Lot size dependent: LED interior light, customer-specific design: stickers, frame color etc.
- Internal LED light



SAO PAULO H 125 G



Freezer for scooping ice cream

Capacity ice cream bins 5 liters (optional):

SAO PAULO H 68	3
SAO PAULO H 100	6
SAO PAULO H 125	9
SAO PAULO H 150	10
SAO PAULO H 175	12

	External Dimensions W x D x H mm	Internal Dimensions W x D x H mm	Capacity (Net/Gross Volume)	Temperature Range °C	Refrigerant Type	Rated Output W	Weight Net/Gross kg
SAO PAULO H 68 G	678 x 709 x 1335	530 x 560 x 880*	132 / 164	-6 to -24	R290	240	52 / 57
SAO PAULO H 100 G	998 x 709 x 1335	850 x 560 x 880*	241 / 293	-6 to -24	R290	280	65 / 70
SAO PAULO H 125 G	1248 x 709 x 1335	1100 x 560 x 880*	327 / 394	-6 to -24	R290	300	74 / 80
SAO PAULO H 150 G	1498 x 709 x 1335	1350 x 560 x 880*	412 / 495	-6 to -24	R290	300	83 / 89
SAO PAULO H 175 G	1748 x 709 x 1335	1600 x 560 x 880*	498 / 596	-6 to -24	R290	320	94 / 101

Also available with refrigerant R404A on request.

ACCESSORIES SYSTEM RIO AND SAO PAULO



Standard basket for RIO S



Standard basket for RIO H and SAO PAULO




Wire basket for ice cream bins



Dividers



Inside thermometer

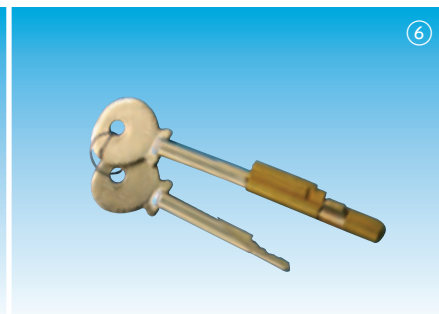

Lock

- ① **Standard basket for RIO S:** improved merchandise presentation, interior design and merchandise access height.
- ② **Standard basket for RIO H and SAO PAULO:** improved merchandise presentation, interior design and merchandise access height.
- ③ **Wire basket for ice cream bins:** for anchoring bins in the unit. Suitable for type SAO PAULO.
- ④ **Dividers:** for customized interior partitioning, optimal space layout and easy loading. Suitable for types RIO, SAO PAULO.
- ⑤ **Interior thermometer:** for temperature control inside the unit. Suitable for types RIO, SAO PAULO. (On request also available with printed loadline)
- ⑥ **Lock:** protection against unauthorized access to merchandise. Suitable for types RIO, SAO PAULO.

Attention: The shown accessories are standard photos. Visual appearance and configuration can slightly vary according to model and specification.

ACCESSORIES ICE CREAM

274511	Lock RIO / SAO PAULO
277901	Inside thermometer RIO / SAO PAULO
231805	Wire basket DK 26 for RIO S
231806	Wire basket DK 26 for RIO H
232877	Dividers TGQ for basket RIO S
234091	Dividers TGQ for basket RIO H
274087	Wire basket for ice cream bins SAO PAULO H, 364 mm
270696	Wire basket for ice cream bins SAO PAULO H, 172 mm
272658	Scooping glass-dome curved for SAO PAULO / RIO H 68
272659	Scooping glass-dome curved for SAO PAULO / RIO H 100
272660	Scooping glass-dome curved for SAO PAULO / RIO H 125
272661	Scooping glass-dome curved for SAO PAULO / RIO H 150
272662	Scooping glass-dome curved for SAO PAULO / RIO H 175
205135	Scooping glass-dome angled for SAO PAULO / RIO H 68
205136	Scooping glass-dome angled for SAO PAULO / RIO H 100
205137	Scooping glass-dome angled for SAO PAULO / RIO H 125
205138	Scooping glass-dome angled for SAO PAULO / RIO H 150
205139	Scooping glass-dome angled for SAO PAULO / RIO H 175

ACAPULCO

KEY BENEFIT:

- Unique, attractive tubular design
- Provides an optimum view of products, through the low access edge
- Low energy consumption
- Adjustable thermostat

OPTIONS

- Temperature display
- Merchandise grates
- Customer-specific labelling (lot size dependent)
- LED-light



Acapulco
Design example

The ACAPULCO has an unique tubular design. It is highly attractive, highly multifunctional and has been carefully developed to further boost your sales. The low access edge makes the product truly effective, especially for children. Furthermore, the curved sliding glass lids are very easy to open due to the smooth manner in which they move.

	External Dimensions W x D x H mm	Capacity (Net/Gross Volume)	Temperature Range °C	Refrigerant Type	Rated Output W	Weight Net/Gross kg
ACAPULCO 800 600/450	800 x 962 x 1005	117 / 183	-14 to -23	R290	430 (ohne Licht)	93 / 109
ACAPULCO 1200 600/450	1200 x 962 x 1005	175 / 275	-14 to -23	R290	430 (ohne Licht)	118 / 134

STORAGE FREEZERS

KEY BENEFIT:

- Aluminium interior container
- Interior lighting integrated in the lid
- Lock

OPTIONS (ex works)

- Additional baskets
- Base unit
- Pressure equalization valve



TM 500



TM 300

Storage freezers in white.

	External Dimensions W x D x H mm	Capacity l	Temperature Range °C	Quantity/Baskets (scope of delivery)	Refrigerant Type	Weight kg
TM 300	920 x 600 x 850*	256	-17 / -24	1	R600A	53
TM 400	1260 x 600 x 850*	373	-17 / -24	2	R600A	61
TM 500	1560 x 600 x 850*	476	-17 / -24	2	R600A	73
TM 600	1700 x 650 x 860*	607	-17 / -24	2	R134A	82

*+45 mm for hinges on rear of cabinets. +35 mm for handle on front of cabinets.



Display Coolers

AIR CURTAIN DISPLAY COOLERS

THE CONCEPT	42
SUSTAINABLE COOLING TECHNOLOGY	43
AHT AC XS AHT AC SLIM 130 AHT AC SLIM 170	44
AHT AC S AHT AC W	45
AHT AC M AHT AC XL	46
ACCESSORIES	47

DISPLAY CABINET – ELEGANT	48
CONVENIENCE – ATLANTA	49

SLIMLINE

MEDIUM SLIM 16 MEDIUM 14	50
----------------------------	----

PLUG IN

MEDIUM RDM 10	51
---------------	----

REMOTE


GIANT AND GIANT SLIM	52
ACCESSORIES	53

MULTIOPTION DISPLAY CABINETS

ACCESSORIES	58
-------------	----



AC – AIR CURTAIN DISPLAY COOLERS – THE CONCEPT

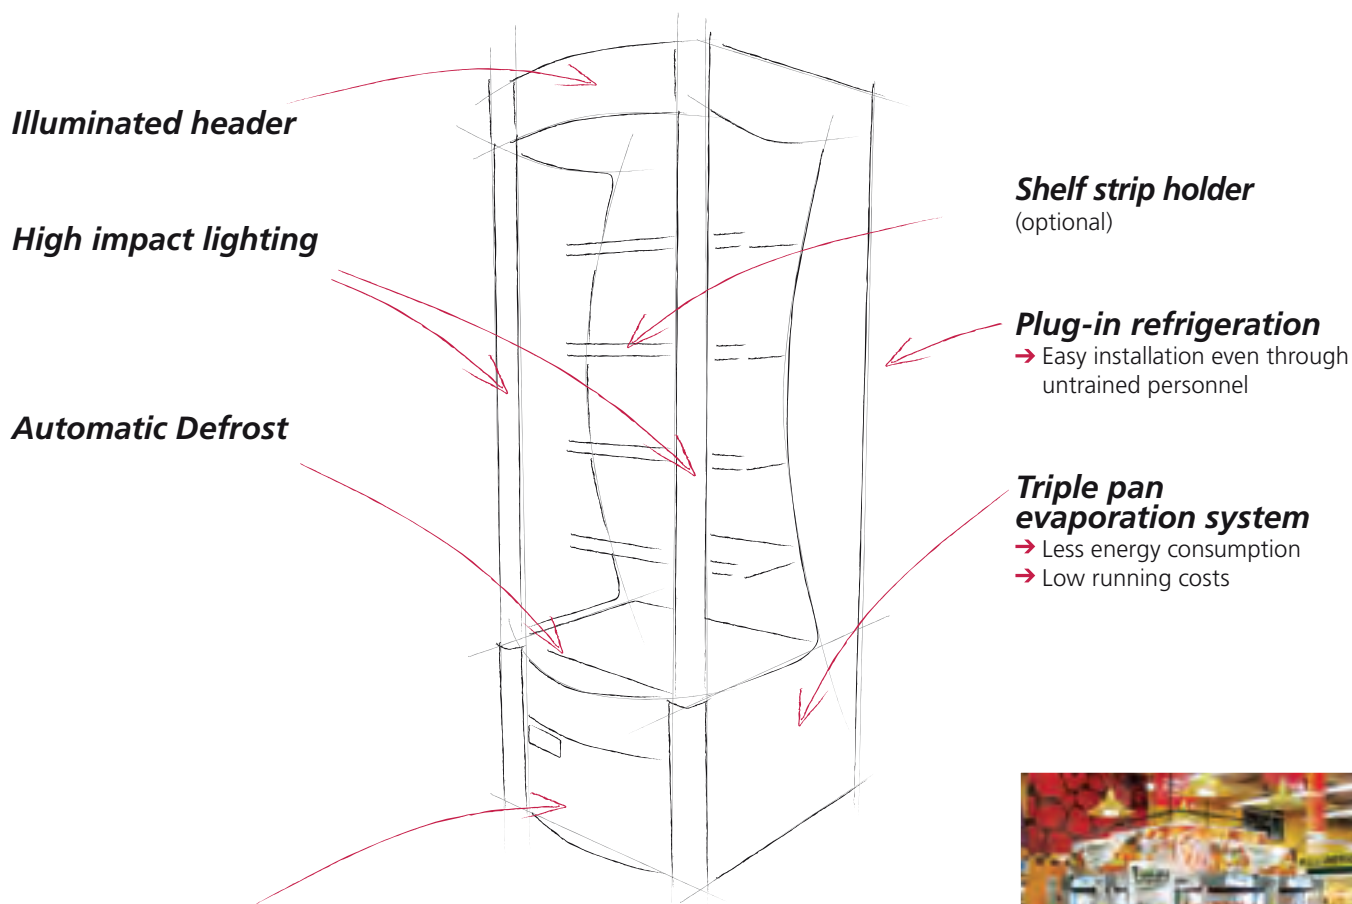

Interchangeable Cooling Cassette (model AHT AC S, W, M, XL and Slim 130+170)



- Cassette replacement within 15 minutes (easy service)
- Cooler does not need to be (re)moved
- No need to empty cooler (except bottom shelf)

**Temperature category
according to EN 441-6: 1994**

Class	max. temperature of the M-package $\leq$	lowest temperature of the M-packages $\geq$
M2	+7 °C	-1 °C

Climate Classes EN 441-4: 1994

Climate classes	Ambient temperature range	Humidity
3	+25 °C	60 %

The cooling capacity of the air curtain display cooler range will vary dependant on the ambient temperature, humidity and requires that the cabinet has been installed and is operated based on the manufacture installation and operating instructions. The manufacturer does not accept any liability for the loss of products due to a cabinet failure.



AC – AIR CURTAIN DISPLAY COOLERS

available
with
R290

Small footprint, maximum product visibility

Eye-catching design – eye-catching advantages. At the POS or in secondary placement: easy to position even in tight spaces!

AHT AC XS

FEATURES

- Very beneficial for “grab-and-go” impulse sales
- Perfect for fresh food and beverages (2 rows of PET-bottles possible)
- Small footprint for placement at check-out counters
- Horizontal LED light
- Illuminated header

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- Two adjustable shelves plus bottom shelf
- Air curtain for optimal cooling performance and low energy consumption

OPTIONS*

- Individual cabinet color
- Personalization

*All options available on request.
Depending on lot size

NEW!
coming in 3rd
quarter of 2013!



AHT AC XS

AHT AC SLIM 130 | AHT AC SLIM 170

FEATURES

- Night blind with intelligent switch for reduced energy consumption
- Optimal/forward product presentation without door
- 2 x LED interior lights
- 1 x LED in illuminated header
- Cassette system for easy maintenance and service

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- Adjustable metal shelves
- Illuminated canopy
- 4 multidirectional castors

OPTIONS*

- Individual cabinet color
- Closed side panels for flexible branding
- Personalization
- Shelf strip holders

*All options available on request.
Depending on lot size



AHT AC SLIM 130

AHT AC SLIM 170

Closed side panels
for flexible branding
(optional)

		AHT AC XS	AHT AC SLIM 130	AHT AC SLIM 170
External dimensions (WxDxH)	[mm]	456x446x945	500x517x1300	500x517x1678
Internal dimensions (WxDxH)	[mm]	374x239x545	430x384x712	430x384x1077
Volume net/gross	[l]	47/60	115/-	175/-
Lighting	LED	1x horizontal	2x vertical + 1x horizontal	2x vertical + 1x horizontal
Capacity	[Pcs.]	60/90 cans (330/250ml)	144 cans (330ml)	192 cans (330ml)
Temperature range	[°C]	+2 to +12	+2 to +7	+2 to +7
Refrigerant type		R134a/R290	R134a/R290	R134a/R290
Max. ambient temperature/humidity	[°C/RH]	25/60	24/55	24/55
Weight net/gross	[kg]	47/50	68/-	75 /-
Loadability 20°/40°/13.6m	[Pcs.]	84/180/208	40/80/96	40/80/96

Ideal for sales campaigns and promotion activities

Placed individually or in groups, AHT AC S and AC W present your products effectively like no other, turning your point of sale into a highly visible sales promotion platform.

AHT AC S | AHT AC W

FEATURES

- Triple pan evaporation system
- Cassette system for easy maintenance and service
- At-front product presentation without door
- Interior lighting
- Night blind to reduce energy consumption
- Energy efficient
- Energy saving control system

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- Three adjustable shelves plus bottom shelf
- Shelf supports can be fixed in inclined position
- 4 wheels
- Space keepers in the back

OPTIONS*

- Individual cabinet color
- Personalization
- Dry shelf system
- Chimney solution
- Illuminated signboard
- Customer-specific shelves and hooks
- Rollerbase
- Shelf strip holders

*All options available on request.
Depending on lot size

**Cooling cassette
interchangeable
within 15 min.**



AHT AC S



AHT AC W

		AHT AC S	AHT AC W
External dimensions (WxDxH)	[mm]	706x766*x1495	914x766*x1495
Internal dimensions (WxDxH)	[mm]	615x565x835	820x400x836
Volume net/gross	[l]	190/245	250/325
Lighting		2 x 14 W vertical	LED (1 horizontal / 4 vertical)
Shelf dimensions (width x depth top/bottom)	[mm]	610 x 320/385	818x390/418
Capacity	[Pcs.]	270 Cans (330 ml)	360 Cans (330 ml)
Temperature range	[°C]	+2 to +7 (3M2)	+2 to +7 (8M2)
Refrigerant type		R404A/R290	R404A/R290
Max. ambient temperature/humidity	[°C/RH]	25/60	24/55
Weight net/gross	[kg]	114/132	125/143
Loadability 20°/40°/13.6m	[Pcs.]	21/45/51	18/36/-

*incl. 50 mm space keeper

AC – AIR CURTAIN DISPLAY COOLERS

available
with
R290

Optimized Power for Your Products

Our models AHT AC M and AC XL prove that appearance and innovative technology can blend into an ideal unit. Perfect visibility from three sides and a brightly lit promotion display make them true eye-catchers and sales professionals.

AHT AC M | AHT AC XL

FEATURES

- Triple pan evaporation system
- Cassette system for easy maintenance and service
- Night blind with intelligent switch for reduced energy consumption
- At-front product presentation without door
- Interior lighting
- Energy efficient
- Energy saving management

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- 4 adjustable shelves plus bottom shelf
- Shelf supports can be fixed in inclined position
- Space keeper in the back
- 4 wheels

OPTIONS*

- Individual cabinet color
- Personalization
- Dry shelf system
- Customer-specific shelves and hooks
- Rollerbase
- Shelf strip holders

*All options available on request.
Depending on lot size

Cooling cassette
interchangeable
within 15 min.




AHT AC M

AHT AC XL

		AHT AC M	AHT AC XL
External dimensions (WxDxH)	[mm]	716x771*x 1973	1195x928* x1973
Internal dimensions (WxDxH)	[mm]	615x565x 1350	1100x700x1290
Volume net/gross	[l]	324/463	720/1060
Lighting		2x28 W and 1x8 W	2x21 W and 2x28W
Shelf dimensions (B x T)	[mm]	610x385	1094x510
Capacity	[Pcs.]	468/225 (330 ml Cans/500ml Bottles)	1224/560 (330 ml Cans/500 ml Bottles)
Temperature range	[°C]	+2 to +7 (8M2)	+2 to +7 (3M2)
Refrigerant type		R404A/R290	R404A
Max. ambient temperature/humidity	[°C/RH]	24/60	25/60
Weight net/gross	[kg]	152/165	227/255
Loadability 20°/40°/13.6m	[Pcs.]	21/45/51	10/21/24

*incl. 50 mm space keeper

INDIVIDUAL ACCESSORIES ON REQUEST

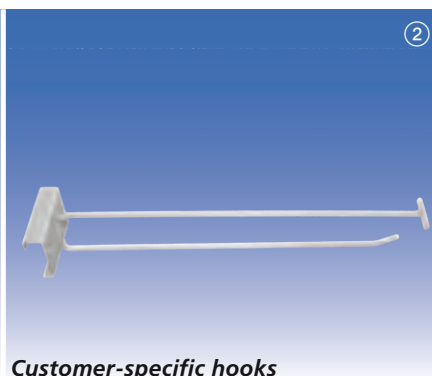


- ① ***Illuminated signboard:*** additional advertising space
- ② ***Customer-specific hooks:*** for individual product packaging
- ③ ***Dry shelf system:*** for complementary products
- ④ ***Chimney solution:*** for diverting waste air upwards and for back-to-back placement
- ⑤ ***Customer-specific shelves***
- ⑥ ***Rollerbase***
- ⑦ ***Shelf strip holders***

DISPLAY CABINET


ELEGANT

FEATURES

- Electronic controller
- Temperature display
- Adjustable legs
- Rear-facing sliding glass doors
- 3 illuminated glass display shelves
- Tiltable front pane
- Choice of exterior colors:



ACCESSORIES page 53

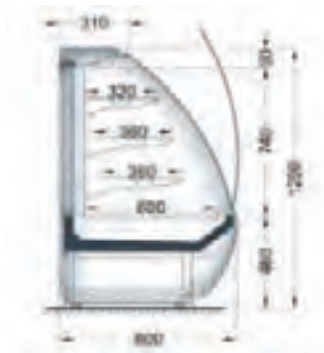

Elegant RDE-01

	External Dimensions W x D x H mm	Net volume l	Shelf Area m ²	Temperature range °C	Refrigerant	Rated Output W	Weight kg
Elegant RDE 01 -60	610x800x1290	161	0,63	3M2 (+2/+4)	R404A	293	210
Elegant RDE 01-90	910x800x1290	241	0,94	3M2 (+2/+4)	R404A	339	260
Elegant RDE 01-140	1410x800x1290	383	1,47	3M2 (+2/+4)	R404A	471	310

Forklift or ramp for unloading must be available on site!

CONVENIENCE DISPLAY CABINET

ATLANTA

FEATURES

- Manual night blind
- Electronic controller
- Temperature display
- Automatic condensate evaporation
- Adjustable legs
- RDA10, 2 display shelves adjustable in height and tilt
- RDA20, 3 display shelves adjustable in height and tilt
- Shelf strip holders
- Top-mounted interior light (single row)
- Plexiglas side panels
- Interior color white (RAL9003)
- Base color black (RAL9005)
- Choice of exterior colors:



9003 7004 7016 1023 3000 5010 6029 9005

ACCESSORIES page 53



Atlanta RDA 10



Atlanta RDA 20



	External Dimensions W x D x H mm	Net volume l	Shelf Area m ²	Temperature range °C	Refrigerant	Rated Output W	Weight kg
Atlanta RDA 10 -125	1250x690x1295	122	0,98	3M2 (+2/+4)	R404A	1122	240
Atlanta RDA 10 -187	1875x690x1295	182	1,46	3M2 (+2/+4)	R404A	1128	350
Atlanta RDA 10-250	2500x690x1295	243	1,95	3M2 (+2/+4)	R404A	1697	420
Atlanta RDA 20 -118	1180x690x1450	151	1,15	3M2 (+2/+4)	R404A	1094	225

Forklift or ramp for unloading must be available on site!

SLIMLINE MULTIDECK DISPLAY WITH GLASS SIDE PANELS

MEDIUM 14 | MEDIUM SLIM 16

FEATURES

- Electronic controller
- Automatic defrost
- 4 shelves, adjustable in height and tilt, with shelf strip holders
- Lighting mounted in top cover
- Manual night blind
- Interior: hot-dipped, powder-coated sheet plate (white – RAL 9003)
- Medium 14: Base in black (RAL 9005)
- Medium Slim 16: Base color identical to chosen exterior color
- Medium Slim 16 CS/CNS: Interior, exterior and base of stainless steel (rear panel: hot-dipped, powder-coated sheet plate)
- Choice of exterior colors:



Medium Slim RDM16



ACCESSORIES page 53



Medium RDM 14

	External Dimensions WxDxH mm	Net volume l	Shelf Area m²	Temperature range °C	Refrigerant	Rated Output W	Weight kg
Medium RDM 14-125	1250 x 860 x 1980	444	1,71	3M2 (+2/+4)	R404A	1316	260
Medium RDM 14-187	1875 x 860 x 1980	667	2,52	3M2 (+2/+4)	R404A	1777	325
Medium Slim RDM 16-95	1030 x 725* x 2000	357	1,41	3M2 (+2/+4)	R404A	1056	180
Medium Slim RDM 16-125	1330 x 725* x 2000	510	1,86	3M2 (+2/+4)	R404A	1316	230
Medium Slim RDM 16-187	1955 x 725* x 2000	706	2,78	3M2 (+2/+4)	R404A	1777	360
Medium Slim RDM 16 95 CS	1030 x 725* x 2000	357	1,41	3M2 (+2/+4)	R404A	1056	190
Medium Slim RDM 16 125 CS	1330 x 725* x 2000	510	1,86	3M2 (+2/+4)	R404A	1316	240
Medium Slim RDM 16 187 CS	1955 x 725* x 2000	706	2,78	3M2 (+2/+4)	R404A	1777	370

*incl. 95 mm space keeper

Forklift or ramp for unloading must be available on site!

PLUG-IN DISPLAY COOLERS WITH OR WITHOUT SIDE PANELS

MEDIUM RDM 10

FEATURES

- Row placement possible
- Electronic controller with temperature display
- Automatic defrost
- 4 shelves, adjustable in height and tilt, with shelf strip holders
- Lighting mounted in top cover
- Manual night blind
- Base in chosen exterior color
- Choice of exterior colors:



9003 7004 7016 1023 3000 5010 6029 9005

ACCESSORIES page 53



Medium RDM 10

	External Dimensions WxDxH mm	Net volume l	Shelf Area m ²	Temperature range °C	Refrigerant	Rated Output W	Weight kg
Medium RDM 10-125	1250 (+2 x 25) x 850 x 2015	601	1,97	3M2 (+2/+4)*	R404A	1332	280
Medium RDM 10-187	1875 (+2 x 25) x 850 x 2015	900	2,95	3M2 (+2/+4)*	R404A	1685	385
Medium RDM 10-250	2500 (+2 x 25) x 850 x 2015	1096	3,94	3M2 (+2/+4)*	R404A	2639	440

* optional 3M1 (0/+2)


Forklift or ramp for unloading must be available on site!

REMOTE MULTIDECK DISPLAY COOLERS

GIANT | GIANT SL

FEATURES

- Unit without side walls (side walls optional, see page 53)
- For connection to central cooling
- 4 adjustable display shelves
- Shelves include upturn and shelf strip holders
- Expansion valve
- Electronic controller
- Overvoltage protection for controller and lighting
- Master security switch
- Lighting mounted in top cover
- Manual night blind
- Choice of refrigerants
- Exterior colors available: RAL 9003, 1023, 3000, 6029, 5010 and 9005
Base: black (RAL 9005)
Bumper rail: gray

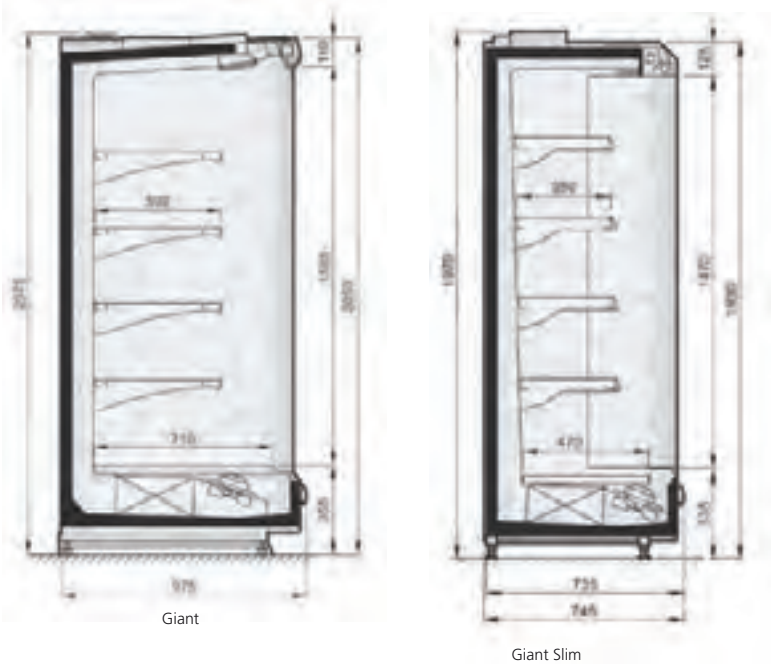

ACCESSORIES page 53



Cooling shelf is row-placeable and delivered without side panels. For connection to **central cooling circuits**.

	External Dimensions W x D x H mm	Shelf Area m²	Temperature range °C	Rated Output (W/ °C VT)	Weight kg
Giant Slim RDK09-1,87	1875 x 745 x 1970	3,49	3M2 (+2/+4)*	2231 / -7	180
Giant Slim RDK09-2,5	2500 x 745 x 1970	4,66	3M2 (+2/+4)*	2975 / -7	300
Giant Slim RDK09-3,75	3750 x 745 x 1970	6,99	3M2 (+2/+4)*	4462 / -7	550
Giant RDG L3-1,87	1875 x 975 x 2075	5,06	3M2 (+2/+4)*	2381 / -7	210
Giant RDG L3-2,5	2500 x 975 x 2075	6,76	3M2 (+2/+4)*	3175 / -7	330
Giant RDG L3-3,75	3750 x 975 x 2075	10,13	3M2 (+2/+4)*	4762 / -7	580

* optional 3M1 (0/+2)

Forklift or ramp for unloading must be available on site!

ACCESSORIES

ELEGANT RDE 01 | ATLANTA RDA 10/20

Rollerbase
 Interior varnishing per meter (non-standard RAL)
 Exterior varnishing per meter (non-standard RAL)
 Product stopper (h=85 mm)
 Per-shelf lighting (T5)
 Special lighting for meat and poultry
 Vertical lattice separators
 Electric defrosting system (3M1)
 Mirrored glass backwall per meter

MEDIUM RDM 14 | MEDIUM SLIM RDM 16

Additional display shelf
 Additional display shelf 300mm
 Product stopper (h=85 mm)
 Per-shelf lighting (T5)
 Special lighting for meat and poultry
 LED interior lighting top
 LED interior lighting top & 4 shelves
 Interior varnishing per meter (non-standard RAL)
 Exterior varnishing per meter (non-standard RAL)
 Basket (instead of shelf)
 Mirrored ceiling per meter (for dark interior colors)
 Glass sliding door with handle
 Hinged door with handle

MEDIUM RDM 10

Glass side panel left
 Glass side panel right
 Tall plexiglas divider
 Additional display shelf 400-1246 mm
 Additional display shelf 400-933.5 mm
 Product stopper (h=85 mm)
 Per-shelf lighting (T5)
 Special lighting for meat and poultry
 LED interior lighting top
 LED interior lighting top & 4 shelves
 Electric defrosting system (3M1)
 Front glass panel (3M1)
 Interior varnishing per meter (non-standard RAL)
 Exterior varnishing per meter (non-standard RAL)
 Mirrored ceiling per meter (for dark interior colors)
 Glass sliding door with handle
 Hinged door with handle

GIANT SLIM RDK 09 | GIANT RDG L3

Panoramic side panel left
 Panoramic side panel right
 Partial glass side panel left
 Partial glass side panel right
 Closed side panel left
 Closed side panel right
 Closed mirrored panel left
 Closed mirrored panel right
 Divider
 Mirrored divider
 Additional display shelf 350 mm
 Additional display shelf 500 mm
 Produce basket (l=933.5 mm)
 Product stopper (h=85 mm)
 Per-shelf lighting (T5)
 Special lighting for meat and poultry
 LED interior lighting top
 LED interior lighting top & 4 shelves
 Electric defrosting system (3M1)
 Front glass panel (3M1)
 Interior varnishing per meter (non-standard RAL)
 Exterior varnishing per meter (non-standard RAL)
 Mirrored ceiling per meter (for dark interior colors)
 Energy-saving fan
 Energy-saving fan for air curtain
 Glass sliding door with handle
 Hinged door with handle
 Electric night blind base module
 Electric night blind extension module

MULTIOPTION DISPLAY CABINETS

FEATURES

- Plug-in cooling shelf (also for remote)
- Optimal product presentation
- Fixed side panels
- Electronic controller with display
- Ventilated cooling with air curtain
- Automatic defrost and hot gas condensate evaporation
- Visible interior and exterior innerliner: CNS AISI 304 (CNS version)
- Innerliner: white powder-coated sheet plate; casing stainless steel (varnished white)
- Environmentally friendly CFC-free insulation
- 4 display shelves (d=400 mm), adjustable in height and tilt; bottom shelf
- Lighting mounted in top cover
- Refrigerant R404A
- VB models ready to plug in, with scroll compressors and low front

OPTIONS

- Night blind (manual or electric)
- Vertical lighting
- Shutter
- Panoramic side panels
- Rear-facing loading doors (glass or solid)
- Per-shelf lighting
- Row placeable (factory-made)
- Front and side panels available in various RAL colors



Multioption white



Special accessory:
glass product stopper



Special accessory: can slides



Special accessory: per-shelf lighting



Multioption VB Slimline Inox

Multioption cooling shelves available in white or stainless steel in standard depth (800 mm) and in Slimline depth (645 mm) for stores with limited space. Door delivery by truck. Forklift or ramp for unloading must be available on site!

MULTIOPTION STANDARD DEPTH (800 MM)

Model	Product code for plug-in unit	Color	External Dimensions W x D x H mm	Shelf area m ²	Temperature range °C	Rated Output		Net weight kg
						KL	EL	
Multioption 065 (+)	FA0111065	white	665 x 800 x 2015	1,28	+3° / +5°	680	980	166
Multioption 065 (+)	FA0112065	Inox	665 x 800 x 2015	1,28	+3° / +5°	680	980	184
Multioption 065 (-)	FA0511065	white	665 x 800 x 2015	1,28	0° / +2°	980	1120	166
Multioption 065 (-)	FA0512065	Inox	665 x 800 x 2015	1,28	0° / +2°	980	1120	184
Multioption 100 (+)	FA0111100	white	960 x 800 x 2015	1,91	+3° / +5°	750	1120	198
Multioption 100 (+)	FA0112100	Inox	960 x 800 x 2015	1,91	+3° / +5°	750	1120	218
Multioption 100 (-)	FA0511100	white	960 x 800 x 2015	1,91	0° / +2°	1035	1370	198
Multioption 100 (-)	FA0512100	Inox	960 x 800 x 2015	1,91	0° / +2°	1035	1370	218
Multioption 120 (+)	FA0111120	white	1250 x 800 x 2015	2,53	+3° / +5°	920	1370	239
Multioption 120 (+)	FA0112120	Inox	1250 x 800 x 2015	2,53	+3° / +5°	920	1370	259
Multioption 120 (-)	FA0511120	white	1250 x 800 x 2015	2,53	0° / +2°	1310	1410	239
Multioption 120 (-)	FA0512120	Inox	1250 x 800 x 2015	2,53	0° / +2°	1310	1410	259
Multioption 150 (+)	FA0111150	white	1510 x 800 x 2015	3,09	+3° / +5°	1250	1410	277
Multioption 150 (+)	FA0112150	Inox	1510 x 800 x 2015	3,09	+3° / +5°	1250	1410	302
Multioption 150 (-)	FA0511150	white	1510 x 800 x 2015	3,09	0° / +2°	1460	1420	277
Multioption 150 (-)	FA0512150	Inox	1510 x 800 x 2015	3,09	0° / +2°	1460	1420	302
Multioption 180 (+)	FA0111180	white	1856 x 800 x 2015	3,83	+3° / +5°	1430	1420	320
Multioption 180 (+)	FA0112180	Inox	1856 x 800 x 2015	3,83	+3° / +5°	1430	1420	353
Multioption 180 (-)	FA0511180	white	1856 x 800 x 2015	3,83	0° / +2°	1910	1500	320
Multioption 180 (-)	FA0512180	Inox	1856 x 800 x 2015	3,83	0° / +2°	1910	1500	353
Multioption 240 (+)	FA0111240	white	2435 x 800 x 2015	5,06	+3° / +5°	1840	2740	410
Multioption 240 (+)	FA0112240	Inox	2435 x 800 x 2015	5,06	+3° / +5°	1840	2740	450
Multioption 240 (-)	FA0511240	white	2435 x 800 x 2015	5,06	0° / +2°	2620	2820	410
Multioption 240 (-)	FA0512240	Inox	2435 x 800 x 2015	5,06	0° / +2°	2620	2820	450
Multioption 300 (+)	FA0111300	white	2955 x 800 x 2015	6,18	+3° / +5°	2500	2810	498
Multioption 300 (+)	FA0112300	Inox	2955 x 800 x 2015	6,18	+3° / +5°	2500	2810	533
Multioption 300 (-)	FA0511300	white	2955 x 800 x 2015	6,18	0° / +2°	2420	2840	498
Multioption 300 (-)	FA0512300	Inox	2955 x 800 x 2015	6,18	0° / +2°	2920	2840	533
Multioption 360 (+)	FA0111360	white	3647 x 800 x 2015	7,46	+3° / +5°	2920	2840	550
Multioption 360 (+)	FA0112360	Inox	3647 x 800 x 2015	7,46	+3° / +5°	2860	2840	585
Multioption 360 (-)	FA0511360	white	3647 x 800 x 2015	7,46	0° / +2°	3820	3000	550
Multioption 360 (-)	FA0512360	Inox	3647 x 800 x 2015	7,46	0° / +2°	3820	3060	585

MULTIOPTION SLIMLINE DEPTH (645 MM)

Model	Product code for plug-in unit	Color	External Dimensions W x D x H mm	Shelf area m ²	Temperature range °C	Rated Output		Net weight kg
						KL	EL	
Multioption Slim 065 (+)	FA0211065	white	665 x 645 x 2015	0,95	+3° / +5°	650	980	146
Multioption Slim 065 (+)	FA0212065	Inox	665 x 645 x 2015	0,95	+3° / +5°	650	980	159
Multioption Slim 065 (-)	FA0611065	white	665 x 645 x 2015	0,95	0° / +2°	845	1120	146
Multioption Slim 065 (-)	FA0612065	Inox	665 x 645 x 2015	0,95	0° / +2°	720	1120	159
Multioption Slim 100 (+)	FA0211100	white	960 x 645 x 2015	1,42	+3° / +5°	720	1120	179
Multioption Slim 100 (+)	FA0212100	Inox	960 x 645 x 2015	1,42	+3° / +5°	985	1370	198
Multioption Slim 100 (-)	FA0611100	white	960 x 645 x 2015	1,42	0° / +2°	985	1370	179
Multioption Slim 100 (-)	FA0612100	Inox	960 x 645 x 2015	1,42	0° / +2°	890	1370	198
Multioption Slim 120 (+)	FA0211120	white	1250 x 645 x 2015	1,88	+3° / +5°	890	1370	209
Multioption Slim 120 (+)	FA0212120	Inox	1250 x 645 x 2015	1,88	+3° / +5°	1280	1410	226
Multioption Slim 120 (-)	FA0611120	white	1250 x 645 x 2015	1,88	0° / +2°	1280	1410	209
Multioption Slim 120 (-)	FA0612120	Inox	1250 x 645 x 2015	1,88	0° / +2°	1220	1410	226
Multioption Slim 150 (+)	FA0211150	white	1510 x 645 x 2015	2,29	+3° / +5°	1220	1410	241
Multioption Slim 150 (+)	FA0212150	Inox	1510 x 645 x 2015	2,29	+3° / +5°	1440	1420	272
Multioption Slim 150 (-)	FA0611150	white	1510 x 645 x 2015	2,29	0° / +2°	1440	1420	241
Multioption Slim 150 (-)	FA0612150	Inox	1510 x 645 x 2015	2,29	0° / +2°	1430	1420	272
Multioption Slim 180 (+)	FA0211180	white	1856 x 645 x 2015	2,84	+3° / +5°	1430	1420	281
Multioption Slim 180 (+)	FA0212180	Inox	1856 x 645 x 2015	2,84	+3° / +5°	1870	1500	303
Multioption Slim 180 (-)	FA0611180	white	1856 x 645 x 2015	2,84	0° / +2°	1870	1500	281
Multioption Slim 180 (-)	FA0612180	Inox	1856 x 645 x 2015	2,84	0° / +2°	1870	1500	303
Multioption Slim 240 (+)	FA0211240	white	2435 x 645 x 2015	3,76	+3° / +5°	1780	2740	362
Multioption Slim 240 (+)	FA0212240	Inox	2435 x 645 x 2015	3,76	+3° / +5°	1780	2740	387

Model	Product code for plug-in unit	Color	External Dimensions W x D x H mm	Shelf area m²	Temperature range °C	Rated Output		Net weight kg
						KL	EL	
Multioption Slim 240 (-)	FA0611240	white	2435 x 645 x 2015	3,76	0° / +2°	2560	2820	362
Multioption Slim 240 (-)	FA0612240	Inox	2435 x 645 x 2015	3,76	0° / +2°	2560	2820	387
Multioption Slim 300 (+)	FA0211300	white	2955 x 645 x 2015	4,58	+3° / +5°	2440	2820	498
Multioption Slim 300 (+)	FA0212300	Inox	2955 x 645 x 2015	4,58	+3° / +5°	2440	2820	533
Multioption Slim 300 (-)	FA0611300	white	2955 x 645 x 2015	4,58	0° / +2°	2880	2840	498
Multioption Slim 300 (-)	FA0612300	Inox	2955 x 645 x 2015	4,58	0° / +2°	2880	2840	533
Multioption Slim 360 (+)	FA0211360	white	3647 x 645 x 2015	5,68	+3° / +5°	2800	2840	550
Multioption Slim 360 (+)	FA0212360	Inox	3647 x 645 x 2015	5,68	+3° / +5°	2800	2840	585
Multioption Slim 360 (-)	FA0611360	white	3647 x 800 x 2015	5,68	0° / +2°	3740	3000	550
Multioption Slim 360 (-)	FA0612360	Inox	3647 x 800 x 2015	5,68	0° / +2°	3740	3000	585

MULTIOPTION VB STANDARD DEPTH (800 MM) (LOW-FRONT VERSION)

Model	Product code for plug-in unit	Color	External Dimensions W x D x H mm	Shelf area m²	Temperature range °C	Rated Output		Weight kg
						KL	EL	
Multioption VB 100 (+)	FA0311100	white	960 x 800 x 2113	2,27	+3° / +5°	1210	1331	198
Multioption VB 100 (+)	FA0312100	Inox	960 x 800 x 2113	2,27	+3° / +5°	1210	1331	218
Multioption VB 100 (-)	FA0711100	white	960 x 800 x 2113	2,27	0° / +2°	1367	1331	198
Multioption VB 100 (-)	FA0712100	Inox	960 x 800 x 2113	2,27	0° / +2°	1367	1331	218
Multioption VB 120 (+)	FA0311120	white	1250 x 800 x 2113	3,01	+3° / +5°	1350	1390	239
Multioption VB 120 (+)	FA0312120	Inox	1250 x 800 x 2113	3,01	+3° / +5°	1350	1390	259
Multioption VB 120 (-)	FA0711120	white	1250 x 800 x 2113	3,01	0° / +2°	1524	1390	239
Multioption VB 120 (-)	FA0712120	Inox	1250 x 800 x 2113	3,01	0° / +2°	1524	1390	259
Multioption VB 150 (+)	FA0311150	white	1510 x 800 x 2113	3,67	+3° / +5°	1436	1462	277
Multioption VB 150 (+)	FA0312150	Inox	1510 x 800 x 2113	3,67	+3° / +5°	1436	1462	302
Multioption VB 150 (-)	FA0711150	white	1510 x 800 x 2113	3,67	0° / +2°	1800	1698	277
Multioption VB 150 (-)	FA0712150	Inox	1510 x 800 x 2113	3,67	0° / +2°	1800	1698	302
Multioption VB 180 (+)	FA0311180	white	1856 x 800 x 2113	4,55	+3° / +5°	1670	1785	320
Multioption VB 180 (+)	FA0312180	Inox	1856 x 800 x 2113	4,55	+3° / +5°	1670	1785	353
Multioption VB 180 (-)	FA0711180	white	1856 x 800 x 2113	4,55	0° / +2°	2400	1758	320
Multioption VB 180 (-)	FA0712180	Inox	1856 x 800 x 2113	4,55	0° / +2°	2400	1758	353
Multioption VB 240 (+)	FA0311240	white	2435 x 800 x 2113	6,02	+3° / +5°	2700	2780	410
Multioption VB 240 (+)	FA0312240	Inox	2435 x 800 x 2113	6,02	+3° / +5°	2700	2780	450
Multioption VB 240 (-)	FA0711240	white	2435 x 800 x 2113	6,02	0° / +2°	3048	2780	410
Multioption VB 240 (-)	FA0712240	Inox	2435 x 800 x 2113	6,02	0° / +2°	3048	2780	450
Multioption VB 300 (+)	FA0311300	white	2955 x 800 x 2113	7,34	+3° / +5°	2872	2924	498
Multioption VB 300 (+)	FA0312300	Inox	2955 x 800 x 2113	7,34	+3° / +5°	2872	2924	533
Multioption VB 300 (-)	FA0711300	white	2955 x 800 x 2113	7,34	0° / +2°	3600	3396	498
Multioption VB 300 (-)	FA0712300	Inox	2955 x 800 x 2113	7,34	0° / +2°	3600	3396	533
Multioption VB 360 (+)	FA0311360	white	3647 x 800 x 2113	9,1	+3° / +5°	3340	3570	550
Multioption VB 360 (+)	FA0312360	Inox	3647 x 800 x 2113	9,1	+3° / +5°	3340	3570	585
Multioption VB 360 (-)	FA0711360	white	3647 x 800 x 2113	9,1	0° / +2°	4800	3516	550
Multioption VB 360 (-)	FA0712360	Inox	3647 x 800 x 2113	9,1	0° / +2°	4800	3516	585


MULTIOPTION VB SLIMLINE DEPTH (645 MM) (LOW-FRONT VERSION)

Model	Product code for plug-in unit	Color	External Dimensions W x D x H mm	Shelf area m²	Temperature range °C	Rated Output		Net weight kg
						KL	EL	
Multioption VB Slim 100 (+)	FA0411100	white	960 x 645 x 2113	1,69	+3° / +5°	1210	1297	179
Multioption VB Slim 100 (+)	FA0412100	Inox	960 x 645 x 2113	1,69	+3° / +5°	1210	1297	198
Multioption VB Slim 100 (-)	FA0811100	white	960 x 645 x 2113	1,69	0° / +2°	1367	1297	179
Multioption VB Slim 100 (-)	FA0812100	Inox	960 x 645 x 2113	1,69	0° / +2°	1367	1297	198
Multioption VB Slim 120 (+)	FA0411120	white	1250 x 645 x 2113	2,23	+3° / +5°	1350	1366	209
Multioption VB Slim 120 (+)	FA0412120	Inox	1250 x 645 x 2113	2,23	+3° / +5°	1350	1366	226
Multioption VB Slim 120 (-)	FA0811120	white	1250 x 645 x 2113	2,23	0° / +2°	1524	1366	209
Multioption VB Slim 120 (-)	FA0812120	Inox	1250 x 645 x 2113	2,23	0° / +2°	1524	1366	226
Multioption VB Slim 150 (+)	FA0411150	white	1510 x 645 x 2113	2,72	+3° / +5°	1436	1416	241
Multioption VB Slim 150 (+)	FA0412150	Inox	1510 x 645 x 2113	2,72	+3° / +5°	1436	1416	272
Multioption VB Slim 150 (-)	FA0811150	white	1510 x 645 x 2113	2,72	0° / +2°	1800	1690	241
Multioption VB Slim 150 (-)	FA0812150	Inox	1510 x 645 x 2113	2,72	0° / +2°	1800	1690	272
Multioption VB Slim 180 (+)	FA0411180	white	1856 x 645 x 2113	3,37	+3° / +5°	1670	1690	281


MULTIOPTION VB SLIMLINE DEPTH (645 MM) (LOW-FRONT VERSION)

Model	Product code for plug-in unit	Color	External Dimensions W x D x H mm	Shelf area m²	Temperature range °C	Rated Output		Net weight kg
						KL	EL	
Multioption VB Slim 180 (+)	FA0412180	Inox	1856 x 645 x 2113	3,37	+3°/+5°	1670	1690	303
Multioption VB Slim 180 (-)	FA0811180	white	1856 x 645 x 2113	3,37	0°/+2°	2400	1690	281
Multioption VB Slim 180 (-)	FA0812180	Inox	1856 x 645 x 2113	3,37	0°/+2°	2400	1690	303
Multioption VB Slim 240 (+)	FA0411240	white	2435 x 645 x 2113	4,46	+3°/+5°	2700	2732	362
Multioption VB Slim 240 (+)	FA0412240	Inox	2435 x 645 x 2113	4,46	+3°/+5°	2700	2732	387
Multioption VB Slim 240 (-)	FA0811240	white	2435 x 645 x 2113	4,46	0°/+2°	3048	2732	362
Multioption VB Slim 240 (-)	FA0812240	Inox	2435 x 645 x 2113	4,46	0°/+2°	3048	2732	387
Multioption VB Slim 300 (+)	FA0411300	white	2955 x 645 x 2113	5,44	+3°/+5°	2872	2832	450
Multioption VB Slim 300 (+)	FA0412300	Inox	2955 x 645 x 2113	5,44	+3°/+5°	2872	2832	485
Multioption VB Slim 300 (-)	FA0811300	white	2955 x 645 x 2113	5,44	0°/+2°	3600	3304	450
Multioption VB Slim 300 (-)	FA0812300	Inox	2955 x 645 x 2113	5,44	0°/+2°	3600	3304	485
Multioption VB Slim 360 (+)	FA0411360	white	3647 x 645 x 2113	6,74	+3°/+5°	3340	3380	507
Multioption VB Slim 360 (+)	FA0412360	Inox	3647 x 645 x 2113	6,74	+3°/+5°	3340	3380	542
Multioption VB Slim 360 (-)	FA0811360	white	3647 x 645 x 2113	6,74	0°/+2°	4800	3380	507
Multioption VB Slim 360 (-)	FA0812360	Inox	3647 x 645 x 2113	6,74	0°/+2°	4800	3380	542

Multioption

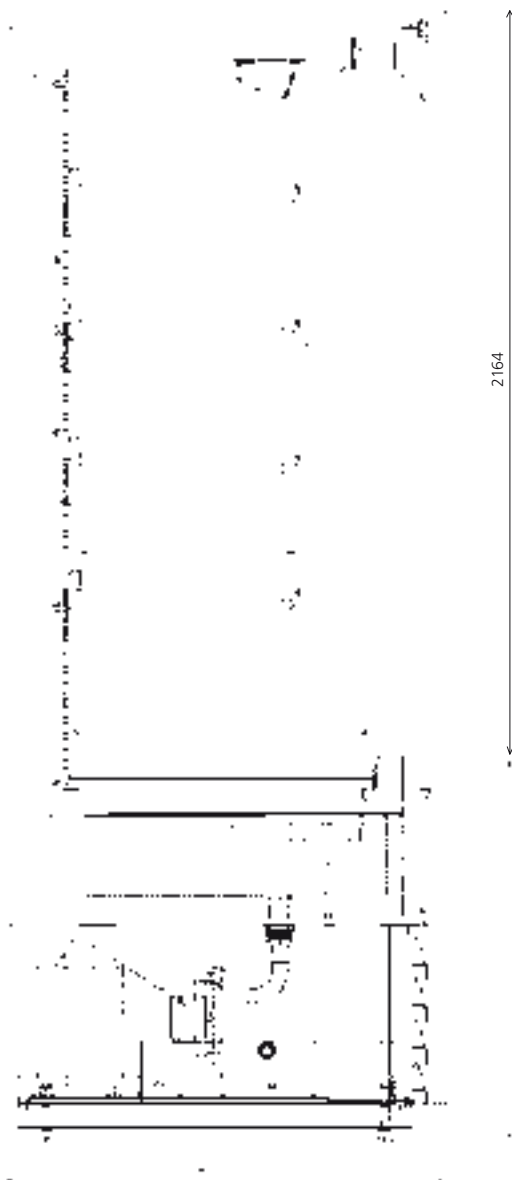

Multioption VB (Low-Front)

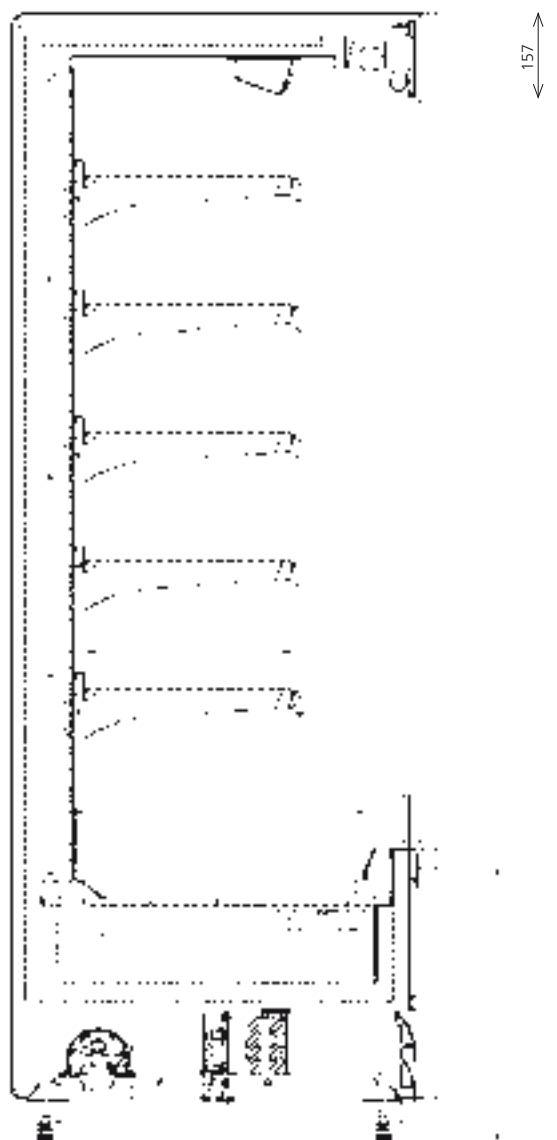

645 - 800

ACCESSORIES FOR MULTIOPTION COOLING SHELVES

	Product code	Product code
Lockable blind in white or gray Attention: height +40 mm, depth +50 mm width blind-frame +30 mm		
M 065	A 004017	A 004009
M 100	A 004000	A 004010
M 120	A 004001	A 004011
M 150	A 004002	A 004012
M 180	A 004003	A 004013
Lockable blind in CNS colors Attention: height +40 mm, depth +50 mm width blind-frame +30 mm		
M 065	A 004200	A 004220
M 100	A 004201	A 004208
M 120	A 004202	A 004209
M 150	A 004203	A 004210
M 180	A 004204	A 004211
Motor blind white or gray with key Attention: height +310mm, depth +20mm		
M 065	not available	not available
M 100	A 005001	A 005005
M 120	A 005002	A 005006
M 150	A 005003	A 005007
M 180	A 005004	A 005008
Motorblind CNS-Colorn with lock Attention: height +310mm, depth +20mm		
M 065	not available	not available
M 100	A 005201	A 005205
M 120	A 005202	A 005206
M 150	A 005203	A 005207
M 180	A 005204	A 005208
Manual sliding doors		
M 065	not available	not available
M 100	A 006601	A 006616
M 120	A 006602	A 006617
M 150	A 006603	A 006618
M 180	A 006604	A 006619
M 240	A 006610	A 006620
M 300	A 006611	A 006621
M 360	A 006612	A 006622
Self-closing insulating doors		
M 065	not available	not available
M 100	A 074001	A 074015
M 120	A 074002	A 074016
M 150	A 074003	A 074017
M 180	A 074004	A 074018
M 240	A 074005	A 074019
M 300	A 074006	A 074020
M 360	A 074007	A 074021
Rear-facing loading doors, solid white Attention: cannot be combined with manual blind!		
M 065	not available	not available
M 100	A 014001	A 014008
M 120	A 014002	A 014009
M 150	A 014003	A 014010
M 180	A 014004	A 014011
M 240*	A 014005	A 014012
M 300*	A 014006	A 014013
M 360*	A 014007	A 014014

	Product code	Product code
Rear-facing loading doors aluminium frame/CNS panel Attention: cannot be combined with manual blind!		
M 065	not available	not available
M 100	A 014201	A 014208
M 120	A 014202	A 014209
M 150	A 014203	A 014210
M 180	A 014204	A 014211
M 240*	A 014205	A 014212
M 300*	A 014206	A 014213
M 360*	A 014207	A 014214
Rear-glass loading doors frame white Attention: cannot be combined with manual blind!		
M 065	not available	not available
M 100	A 015001	A 015008
M 120	A 015002	A 015009
M 150	A 015003	A 015010
M 180	A 015004	A 015011
M 240*	A 015005	A 015012
M 300*	A 015006	A 015013
M 360*	A 015007	A 015014
Rear-facing loading doors aluminium frame/glass pane Attention: cannot be combined with manual blind!		
M 065	not available	not available
M 100	A 015031	A 015035
M 120	A 015032	A 015036
M 150	A 015033	A 015037
M 180	A 015034	A 015038
M 240*	A 015043	A 015046
M 300*	A 015044	A 015047
M 360*	A 015045	A 015048

* with dividing side panel



Special accessory:
rear-facing loading doors

For all Multioption units	
	Product code
Electronic control with RS 484 connector	
(+)	A 075001
(-)	A 076001

	Standard	Slim	VB	VB Slim
	Product code	Product code	Product code	Product code
Interior varnish in RAL color				
M 065	A 019536	A 019507	not available	not available
M 100	A 019500	A 019508	A 019522	A 019529
M 120	A 019501	A 019509	A 019523	A 019530
M 150	A 019502	A 019510	A 019524	A 019531
M 180	A 019503	A 019511	A 019525	A 019532
M 240	A 019504	A 019512	A 019526	A 019533
M 300	A 019505	A 019513	A 019527	A 019534
M 360	A 019506	A 019514	A 019528	A 019535
Exterior varnish in RAL color				
M 065	A 036549	A 036507	not available	not available
M 100	A 036500	A 036508	A 036521	A 026529
M 120	A 036501	A 036509	A 036522	A 026530
M 150	A 036502	A 036510	A 036523	A 026531
M 180	A 036503	A 036511	A 026524	A 026532
M 240	A 036504	A 036512	A 026525	A 026533
M 300	A 036505	A 036513	A 026526	A 026534
M 360	A 036506	A 036514	A 026527	A 026535

Standard, Slim and VB	
	Product code
Manual night blind	
M 065	A 003000
M 100	A 003002
M 120	A 003003
M 150	A 003004
M 180	A 003005
Motor blind	
M 065	not available
M 100	A 053000
M 120	A 053001
M 150	A 053002
M 180	A 053003
Per-shelf lighting	
M 065	A 020000
M 100	A 020001
M 120	A 020002
M 150	A 020003
M 180	(je 2 x M 065)
Per-shelf lighting Natura	
M 065	A 021000
M 100	A 021001
M 120	A 021002
M 150	A 021003
M 180	(je 2 x M 065)
Illuminated front panel	
M 065	A 001000
M 100	A 001001
M 120	A 001002
M 150	A 001003
M 180	A 001004
Reflective side panels	
	A025000
Compressor protection	
	NEU
Castor wheel set	
	A045000
Standard, Slim and VB	
	Product code

Glass product stopper	
M 065	A 022600
M 100	A 022601
M 120	A 022602
M 150	A 022603
M 180	(je 2 x M 065)
Plexiglas product stopper	
M 065	A 002605
M 100	A 002606
M 120	A 002607
M 150	A 002608
M 180	(je 2 x M 065)
Tray slide	
M 065	not available
M 100	A 058200
M 120	A 058201
M 150	A 058202
M 180	A 058203

Standard and VB	
	Product code
Can slides, divided, per shelf	
M 100	A 057200
M 120	A 057201
M 150	A 057202

Slim and VB Slim	
	Product code
Can slides, divided, per shelf	
M 100	A 057204
M 120	A 057205
M 150	A 057206

Standard and VB	
	Product code
Additional shelf, white (400 mm)	
M 065	A011010
M 100	A011000
M 120	A011001
M 150	A011002

Slim and VB Slim	
	Product code
Additional shelf, white (300 mm)	
M 065	A011004
M 100	A011005
M 120	A011006
M 150	A011007

Standard and VB	
	Product code
Additional shelf, stainless steel (400 mm)	
M 065	A011210
M 100	A011200
M 120	A011201
M 150	A011202

Slim and VB Slim	
	Product code
Additional shelf, stainless steel (300 mm)	
M 065	A011004
M 100	A011005
M 120	A011006
M 150	A011007

Slim and VB Slim	
	Product code
Panoramic side panels, 645 mm deep	
	A026602

Standard and VB	
	Product code
Panoramic side panels, 800 mm deep	
	A026600



Upright Coolers & Freezers

PROMOTION

AHT FANCY SLIM	62
AHT 185 C	63

UPRIGHT GLASS DOOR COOLERS

AHT 365 325 C 375 C BLACK HC LED 510 C	64
--	----

DOUBLE DOOR COOLERS

CMVD 97 CMVD 120	65
--------------------	----

EVENT & STORAGE COOLERS

AHT 375 C EVENT AHT 350 SDP	66
-------------------------------	----

GLASS DOOR FREEZERS – SINGLE/DOUBLE DOOR

FR 400 NV 500 NV 1100 NV	67
------------------------------	----

COOLING & FREEZING UPRIGHT CABINETS

SDS 570 F SDS 570 SGDS 580	68
--------------------------------	----

WINE COOLING CABINETS

VKG 571 VINO	69
----------------	----



PROMOTION



Cool dress for success

AHT FANCY SLIM

FEATURES

- Small footprint – low space requirement
- Attractive design with premium finish
- Automatic defrost and condensate evaporation
- Heavy duty ABS plastic shell

SPECIFICATIONS

- R600a
- 2 vertical LED light strips
- Temperature display
- Exterior color black or gray
- Aluminium interior liner
- Lock
- Self-closing door
- Built-in door handle
- 6 chrome shelves
- Shelf strip holders

OPTIONS*

- Branding with stickers
- Illuminated LED header
- Other colors on request

* All options available on request.
Depending on lot size



AHT Fancy Slim

NEW OPTION
Illuminated LED header



Exterior color black or gray

AHT Fancy Slim		
External dimensions (WxDxH)	[mm]	395x476 x1850
Internal dimensions (WxDxH)	[mm]	320x341 x 1400
Volume net/gross	[l]	134,5/-
Capacity 255 ml / 330 ml Cans	[Pcs.]	170/108
Temperature range	[°C]	0 to +10
Refrigerant type		R600a
Max. ambient temperature/humidity	[°C/RH]	32/65
Weight net/gross	[kg]	60/69
Loadability 20"/40"	[Pcs.]	52/110

Low Height – Full Capacity – Smart & Economic

AHT 185 C

FEATURES

- Maximum efficiency and cooling power
- Double paned tempered glass
- Forced air circulation
- Low maintenance condenser
- Automatic defrost and condensate evaporation

SPECIFICATIONS

- 4 adjustable shelves
- ABS plastic interior liner, white
- Electronic temperature control
- Illuminated LED header
- LED interior lighting
- Self-closing door
- Built-in door handle
- Lock

OPTIONS*

- Individual cabinet color
- Glass shelves
- Branding with stickers

* All options available on request.
Depending on lot size



AHT 185 C

AHT 185 C		
External dimensions (WxDxH)	[mm]	524x600 x 1464
Internal dimensions (WxDxH)	[mm]	449x470x981
Net volume	[l]	241
Capacity 250 ml Cans	[Pcs.]	239
Temperature range	[°C]	+1 to +7
Refrigerant type		R600a
Max. ambient temperature/humidity	[°C/RH]	32/56
Number of adjustable lattice shelves		4
Weight net/gross	[kg]	58/63
Loadability 20"/40"	[Pcs.]	51/100

UPRIGHT GLASS DOOR COOLERS

available
with
R600a

available
with
LED

AHT 365 | 325 C | 375 C BLACK HC LED | 510 C

FEATURES

- Automatic defrost and condensate evaporation
- Illuminated promotion display
- Maximum efficiency and cooling power
- CFC-free

SPECIFICATIONS

- White powder-coated steel plate
- ABS plastic innerliner
- Interior lighting
- 5 adjustable shelves
- Integrated door handle
- Lock
- Light switch
- Shelf strip holders
- Analog thermometer

OPTIONS*

- External door handle
- Branding with stickers
- Choice of exterior colors
- LED lighting (standard for AHT 375C)
- R600a (Standard for AHT 375C)
- Closed backwall

* All options available on request.
Depending on lot size

Available with
closed backwall



AHT 365



AHT 325 C



AHT 375 C BLACK HC LED



AHT 510 C

		AHT 365	AHT 325 C	AHT 375 C BLACK HC LED	AHT 510 C
External dimensions (WxDxH)	[mm]	590x610x1885	590x610x1877	590x610x2010	710x610x2035
Internal dimensions (WxDxH)	[mm]	510x470x1565	510x470x1575	510x470x1575	610x505x1660
Volume net/gross	[l]	365/390	364/375	364/375	478/511
Capacity	[Pcs.]	449 Cans (330 ml)	399 Cans (330 ml)	399 Cans (330 ml)	540 Cans (330 ml)
Temperature range	[°C]	+2 to +10	+2 to +10	+2 to +10	+2 and +8
Refrigerant type		R134a	R134a	R600a	R134a
Max. ambient temperature/humidity	[°C/RH]	30/60	30/60	30/60	30/60
Weight net/gross	[kg]	73/77	75/79	80/84	111/115
Loadability 20°/40°/13.6 m	[Pcs.]	27/57/84	27/57/84	27/57/84	27/54/63

DOUBLE DOOR COOLERS

R290



CMVD 97 P+S | 120 P+S

FEATURES

- Illuminated header
- casing: galvanized steel with white finish
- 2 self-closing hinged (P) or sliding (S) doors
- Light switch

SPECIFICATIONS

- Electronic temperature control with digital display
- Automatic defrost and condensate evaporation
- 5 adjustable shelves
- Vertical interior LED lighting
- CFC-free
- R290

OPTIONS*

- Lock
- Branding with stickers
- Shelves may be tilted

* All options available on request.
Depending on lot size



CMVD 97 P ECO



CMVD 120 S ECO

		CMVD 97 P ECO	CMVD 97 S ECO	CMVD 120 P ECO	CMVD 120 S ECO
External dimensions (WxDxH)	[mm]	970x675x2085	970x675x2085	1207x675x2085	1207x675x2085
Internal dimensions (WxDxH)	[mm]	870x500x1475	870x500x1475	1095x500x1475	1095x500x1475
Volume net/gross	[l]	610/640	610/640	780/807	780/807
Capacity	[Pcs.]	572/362	695/356	850/445	405/777
Temperature range	[°C]	0 to +7	0 to +7	0 to +7	0 to +7
Refrigerant type		R290	R290	R290	R290
Max. ambient temperature/humidity	[°C/RH]	32/65	32/65	32/65	32/65
Weight net/gross	[kg]	156/172	156/172	180/200	180/200
Loadability 20°/40°/13.6 m	[Pcs.]	18/36/39	18/36/39	12/28/31	12/28/31

The mobile eye-catcher for all events

AHT 375 C EVENT | AHT 350 SDP

SPECIFICATIONS

- Ventilated Cooling
- Automatic defrost and condensate evaporation
- Adjustable shelves
- ABS plastic interior liner

OPTIONS*

- Lock
- Wheels
- Door handle
- R600a
- LED lighting (AHT 375 C Event)

* All options available on request.
Depending on lot size

Transport protection bar
Ideal for frequent relocation
(e.g. events, promo tours, etc.)



AHT 350 SDP (Wheels optional)



AHT 375 C EVENT (Transport protection)



AHT 375 C Event



AHT 350 SDP

		AHT 375 C Event	AHT 350 SDP
External dimensions (WxDxH)	[mm]	590x625x2010	590x625x1740
Internal dimensions (WxDxH)	[mm]	510x470x1575	510x470x1575
Volume net/gross	[l]	364/375	350/375
Capacity	[Pcs.]	399 Cans (330 ml)	399 Cans (330 ml)
Temperature range	[°C]	+2 to +10	+2 to +10
Refrigerant type		R134a	R134a
Max. ambient temperature/humidity	[°C/RH]	30/60	30/60
Weight net/gross	[kg]	80/84	63/74
Loadability 20°/40°/13.6 m	[Pcs.]	27/57/80	27/57/80

GLAS DOOR FREEZING CABINETS – SINGLE/DOUBLE DOORS

For ideal presentation of frozen foods in gas stations, bake shops etc.

FR 400 NV | 500 NV | 1100 NV

FEATURES

- Ventilated cooling
- Automatic defrost and condensate evaporation
- Interior lighting
- 5 adjustable shelves per door
- Casing: powder-coated steel plate, white
- ABS plastic innerliner
- Heated door frame



FR 400 NV



FR 1100 NV

	External dimensions WxDxH mm	Temperature range °C	Volume gross l	Refrigerant type	Nominal power W	Weight kg
FR 400 NV	670 x 685 x 1990	-15/-25	430	R507	750	123
FR 500 NV	670 x 765 x 1990	-15/-25	470	R507	750	135
FR 1100 NV	1346 x 765 x 1990	-15/-25	1047	R507	1850	234

COOLING & FREEZING CABINETS



SDS 570 F | SDS 570 | SGDS 580

FEATURES

- Digital temperature readout
- External door handle
- Reversible door
- LED interior lighting
- Lock
- 6 evaporator shelves /
6 adjustable shelves in SGDS 580
- Ready to plug in
- CFC-free



SDS 570 F



SDS 570



SGDS 580

	External dimensions WxDxH mm	Internal dimensions WxDxH mm	Temperature range °C	Volume gross l	Refrigerant type	Nominal power W	Weight kg
SDS 570 F	775x755x1870	657 x 580 x 1630	-10 / -25	570	R134a	300	100
SDS 570	775x755x1870	657 x 580 x 1630	0 / +10	570	R134a	300	100
SGDS 580	775x735x1850	657 x 580 x 1630	0 / +10	580	R134a	300	97

WINE COOLING CABINETS

available
with
R600a



CHEST COOLERS &
FREEZERS

DISPLAY COOLERS

UPRIGHT COOLERS &
FREEZERS

VKG 571

FEATURES

- Plug in
- Casing: varnished steel plate, black
- Static cooling
- Compressor with vibration damper
- Replaceable carbon filter
- LED interior lighting
- Real wood shelves
- Insulated glass door in oak or walnut
- Door-hinge changeable



VKG 571

	External dimensions WxDxH mm	Temperature range °C	Volume gross l	Refrigerant type	Nominal power W	Weight kg
VKG 571	595x595x1850	+6 to +16	355	R134a/R600a	190/125	78

VINO

FEATURES

- Plug-in
- 2 different temperature zones
(VINO DELUXE)
- Silent cooling
- Real wood front paneling
- Lockable insulated glass door in oak or walnut
- Vertical interior lighting
- Automatic defrost
- CFC-free



VINO



VINO DELUXE

Attractive wine display coolers for use in gastronomy.

	External dimensions WxDxH mm	Internal dimensions WxDxH mm	Packout	Roste	Refrigerant type	Nominal power W	Weight kg
VINO Eiche	830x480x1900	730x329x1300	120	4	R134A	430	130
VINO Nuss	830x480x1900	730x329x1300	120	4	R134A	430	130
VINO DELUXE Eiche	1200x480x1900	1100x320x1300	120 + 48	4	R134A	488	180
VINO DELUXE Nuss	1200x480x1900	1100x320x1300	120 + 48	4	R134A	488	180



Countertop & Can Coolers

COUNTERTOP COOLERS

AHT 20 C AHT 50 C AHT 100 C	72
AHT 45 AHT 75	73
AHT 18 AHT 61 AHT 88	74

AHT EXTRA COLD

AHT 75 SZ AHT 100 CF	75
------------------------	----

IMPULSE COOLERS

AHT FB 98 HC AHT R 60 HC RC	76
-------------------------------	----

CAN COOLERS

AHT 60 BC AHT 60 BC RC AHT 65 BC AHT 65 BC RC	77
---	----

SHELF COOLERS

SHELF COOLER	78
--------------	----

BACKBAR COOLERS

BB 1 H BB2 H BB 2 S	79
-------------------------	----



For easy placement and optimal sales promotion

AHT 20 C | AHT 50 C | AHT 100 C

FEATURES

- Limited space required
- Illuminated LED header
- High cooling performance
- Environment-friendly refrigerant R600a
- Reversible door
- Built-in door handle (AHT 50/100 C)

OPTIONS*

- Personalization
- Choice of casing color
- Customer-specific shelf solutions
- Illuminated door display

*All options available on request.
Depending on lot size

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- Top-mounted compressor
- Lock
- Adjustable shelves
- 1 shelf: AHT 20 C,
2 shelves: AHT 50 C, AHT 100 C
- Innerliner: ABS plastic gray
- NEW – Electronic thermostat
- NEW – 2 vertical LED strips mounted in door frame
- NEW – 1 LED in canopy



AHT 20 C



AHT 50 C



AHT 100 C

		AHT 20 C	AHT 50 C	AHT 100 C
External dimensions (WxDxH)	[mm]	295x345x545	435x455x700	480x510x805
Internal dimensions (WxDxH)	[mm]	230x257x310	364x337x445	410x392x550
Volume net/gross	[l]	15/17,5	56/61	84/88
Capacity (250/330ml)	[Pcs.]	24/18 Cans	78/50 Cans	108/90 Cans
Max. ambient temperature/humidity	[°C /RH]	32/65	32/65	32/65
Temperature range	[°C]	+2 to +12	+2 to +12	+2 to +12
Refrigerant type		R600a	R600a	R600a
Weight net/gross	[kg]	17/17,5	30/32	38/40
Loadability 20°/40°/13.6 m	[Pcs.]	216/504/540	96/192/312	80/176/192

Premium Design

AHT 45 | AHT 75

FEATURES

- Limited space required
- High cooling performance
- Environment-friendly refrigerant R600a

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- Bottom mounted compressor
- Mechanical thermostat
- Innerliner: ABS plastic gray (AHT 45: aluminium)
- 2 vertical LED strips mounted in door frame
- 2 adjustable shelves
- Lock

OPTIONS*

- Personalization
- Choice of casing color
- Customer-specific shelf solutions
- Illuminated door display

*All options available on request.
Depending on lot size



AHT 45



AHT 75

		AHT 45	AHT 75
External dimensions (WxDxH)	[mm]	430x520x594	480x485x650
Internal dimensions (WxDxH)	[mm]	360x385x495	410x380x550
Volume net/gross	[l]	55/60	67,5/71
Capacity (250/330 ml)	[Pcs.]	66/45 Cans	105/60 Cans
Max. ambient temperature/humidity	[°C / RH]	25/60	25/60
Temperature range	[°C]	+2 to +12	+2 to +12
Refrigerant type		R600a	R600a
Weight net/gross	[kg]	26,5/28,5	30/33
Loadability 20°/40°/13.6 m	[Pcs.]	132/276/312	120/264/288

COUNTERTOP COOLERS



Premium Design

AHT 18 | AHT 61 | AHT 88

FEATURES

- Limited space required
- High cooling performance
- Environment-friendly refrigerant R600a

SPECIFICATIONS

- automatic defrost and condensate evaporation
- 2 vertical & 1 horizontal LED strips mounted in door frame
- Electronic thermostat
- Innerliner: ABS plastic (silver)
- Casing: powder-coated (black)
- Aluminium door frame with built-in handle
- 2 adjustable shelves
- Lock

OPTIONS*

- LCD screen (size: 10.2") in canopy (AHT 61/88)
- Personalization
- Choice of casing color
- Customer-specific shelf solutions
- Illuminated door display

*All options available on request.
Depending on lot size



LCD screen
(optional for AHT 61 and AHT 88)



AHT 18



AHT 61



AHT 88

		AHT 18	AHT 61	AHT 88
External dimensions (WxDxH)	[mm]	295 x 345 x 545	435x455x700	480x510x805
Internal dimensions (WxDxH)	[mm]	230 x 257 x 310	364x337x445	410x392x550
Volume net/gross	[l]	15/17.5	56/61	84/88
Capacity (250/330ml)	[Pcs.]	24/18 Cans	78/-Cans	108/- Cans
Max. ambient temperature/humidity	[°C/RH]	32/65	32/65	32/65
Temperature range	[°C]	+2 to +12	+2 to +12	+2 to +12
Refrigerant type		R600a	R 600a	R 600a
Weight net/gross	[kg]	17/17,5	30/32	38/40
Loadability 20"/40"/13.6 m	[Pcs.]	216/504/540	96/192	80/176



Ice cold refreshed

In general, alcoholic beverages cooled to just below 0°C have the advantage of retaining their ideal drinking temperature even in very warm environments. This allows your customers to enjoy their drinks down to the last drop and makes them come back for more. Our countertop cooler AHT 75 SZ let you offer your customers ice cold refreshment no matter what the circumstances!

AHT 75 SZ

FEATURES

- Designed to serve drinks super cold
- Creates additional promotional opportunities
- Limited space required
- Large LED temperature display
- Environment-friendly refrigerant R600a

SPECIFICATION

- Automatic defrost and condensate evaporation
- Interior lining: Abs plastic
- CFC-free
- 2 adjustable shelves
- 2 LED interior lights
- Lock

OPTIONS*

- Personalization
- Choice of casing color
- Customer-specific shelf solutions

*All options available on request.
Depending on lot size



AHT 75 SZ

AHT 100 CF

FEATURES

- For placement near cash wraps or on checkout counters
- Limited space required
- Ideal for ice cream
- Creates additional promotional opportunities
- R290

OPTIONS*

- Personalization
- Choice of casing color
- Customer-specific shelf solutions

*All options available on request.
Depending on lot size

SPECIFICATION

- Static refrigeration
- Mechanical thermostat
- 2 adjustable shelves
- Aluminium innerliner
- Aluminium door frame
- 1 LED in the canopy
- 1 LED interior light
- manual defrost
- Lock



AHT 100 CF

		AHT 75 SZ	AHT 100 CF
External dimensions (WxDxH)	[mm]	480x485x705	530x480x865
Internal dimensions (WxDxH)	[mm]	410x392x550	410x355x510
Volume net/gross	[l]	72/-	66/-
Capacity	[Pcs.]	105 (250 ml Cans)	-
Max. ambient temperature/humidity	[°C/RH]	32/60	30/55
Temperature range	[°C]	-1 to +1**	-18 to -22
Refrigerant type		R600a	R290
Number of adjustable shelves		2	2
Weight net/gross	[kg]	31/34	46/50
Loadability 20'/40'	[Pcs.]	120/264	80/160

**air temperature may increase during defrost mode

IMPULSE COOLERS



Full transparency for impulse sales

AHT FB 98 HC

FEATURES

- Ideal walk-around display
- Limited space required for easy placement
- Four glass sides for perfect product presentation

SPECIFICATIONS

- High-impact LED lighting
- Energy-efficient transparent sliding lid
- Multi-directional wheels
- Automatic defrost and condensate evaporation

OPTIONS*

- Personalization
- Choice of casing color

*All options available on request.
Depending on lot size

NEW!
coming in
3rd quarter 2013!



AHT FB 98 HC

Rechargeable Chimney Cooler

AHT R 60 HC RC

FEATURES

- Rechargeable cooler maintains product temperature for approx. 10 hrs. without electricity
- Easy and flexible positioning (4 multi directional wheels)
- Transparent full opening lid
- Digital controller and temperature readout
- Interchangeable graphic system

SPECIFICATIONS

- Ventilated cooling
- Automatic defrost and condensate evaporation
- Wire grid divider
- Cable winding hooks

OPTION*

- Personalization

*All options available on request.

NEW!

plug-off and sell –
keeps temperature for
approx. 10hrs without
electricity



AHT R 60 HC RC

		AHT FB 98 HC	AHT R 60 HC RC
External dimensions (WxDxH)	[mm]	598x509x920	480x355x945
Internal dimensions (WxDxH)	[mm]	456x541x375	387x230x585
Volume net/gross	[l]	98/-	52/60
Temperature range	[°C]	0 to +8	0 to +8
Refrigerant type		R600a	R600a
Max. ambient temperature/humidity	[°C/RH]	27/55	32/55
Weight net/gross	[kg]	75/-	34,5/36
Loadability 20'/40'	[Pcs.]	60/126	104/224/343

For impulse sales

AHT 60 BC | 60 BC RC | 65 BC | 65 BC RC

FEATURES


- Slimline can-shaped
- Rechargeable can cooler (RC) maintains products cold for approx. 10 hrs. without electricity
- Easy and flexible positioning (4 multi-directional wheels)
- Wire grid divider
- Thermometer (RC-version only)
- Interchangeable graphic system
- Transparent full opening lid

SPECIFICATIONS

- Ventilated cooling
- Automatic defrost and condensate evaporation
- Galvanised, powder-coated steel with plastic top and bottom ring
- Cable winding channel (AHT 65 BC RC)



high efficient air ventilation
(AHT 60/65 BC)

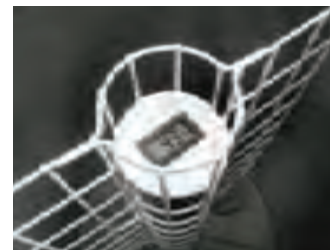

Thermometer (RC-version only)

Interchangeable
graphic system



AHT 60 BC



AHT 60 BC RC



AHT 65 BC



AHT 65 BC RC

		AHT 60 BC	AHT 60 BC RC	AHT 65 BC	AHT 65 BC RC
External dimensions (WxDxH)	[mm]	451x925	453x942,5	548x960	548x960
Internal dimensions (WxDxH)	[mm]	376x540	383x540	390x535	390x535
Volume net/gross	[l]	56/61	57/-	65/77	65/77
Capacity	[Pcs.]	56 Cans (250ml)	60 Cans (330ml)	40 Cans (500ml PET)	73 Cans (330ml)
Temperature range	[°C]	0 to +10	0 to +8	+2 to +7	+2 to +10
Refrigerant type		R600a	R600a	R600a	R600a
Max. ambient temperature/humidity	[°C/RH]	30/60	30/60	30/60	30/60
Weight net/gross	[kg]	26/32	26/32	35/40	35/40
Loadability 20°/40°/13.6 m	[Pcs.]	80/176/192	80/176/192	80/160/-	80/160/-

Place chilled products with complementary food

FEATURES

- Built-in version
- LED interior lighting

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- Air curtain for optimal cooling performance
- Low energy consumption

NEW!

Introduction scheduled for 3rd quarter 2013!



To build into furniture and dry shelves.



SHELF COOLER
(silver)



SHELF COOLER with sliding door
(black)

		SHELF COOLER
External dimensions (WxDxH)	[mm]	688x427x450
Internal dimensions (WxDxH)	[mm]	620x270x280
Volume net/gross	[l]	40/-
Capacity	[Pcs.]	40 Cans (250ml)
Temperature range	[°C]	0 to +8
Refrigerant type		R600a
Max. ambient temperature/humidity	[°C/RH]	27
Weight net/gross	[kg]	30/33
Loadability 20°/40°/13.6 m	[Pcs.]	96/224/256

Under-counter coolers for all configurations

BB 1 H | BB 2 H | BB 2 S

FEATURES

- Adjustable heavy duty shelving
- Air flow and exhaust to the front allows integration of coolers into furniture
- High ambient operating temperature
- Lock (only on hinged doors)

SPECIFICATIONS

- Automatic defrost and condensate evaporation
- Mechanical thermostat
- 2 adjustable shelves per door
- Aluminium innerliner
- LED interior lighting
- H = Hinged door, S = Sliding door



BB 1 H



BB 2 H

		BB 1 H	BB 2 H	BB 2 S
External dimensions (WxDxH)	[mm]	555x495x840	868x495x840	865x495x840
Internal dimensions (WxDxH)	[mm]	471x371x695	781x371x690	781x371x690
Volume net/gross	[l]	118	190	190
Configuration		1 hinged door	2 hinged doors	2 sliding doors
Temperature range	[°C]	0 to +10	0 to +10	0 to +10
Refrigerant type		R600a	R600a	R600a
Rated output	[W]	125	155	155
Max. ambient temperature/humidity	[°C/RH]	32/60	32/60	32/60
Weight net	[kg]	44,2	59,5	59,5
Loadability 20"/40"	[pz.]	70/144	48/100	40/100

CHEST COOLERS &
FREEZERS

DISPLAY COOLERS

UPRIGHT COOLERS &
FREEZERS

COUNTERTOP &
CAN COOLERS

ISLAND COOLERS & SERVE
OVER DISPLAY CABINETS



Island Coolers & Serve Over Display Cabinets

ISLAND COOLERS

STELLA 125	82
STELLA 125 STEP	83
STELLA 70-07 STELLA 90-07 STELLA 70-12 STEP STELLA 90-12 STEP	84
STELLA WITH GLASS SLIDING LID	85
STELLA FOR FRUIT AND VEGETABLES	86
STELLA FOR FISH	87

ISLAND COOLER & FREEZER

PAMIR	88
-------	----

SERVE OVER CABINET

GRACIA 04	89
-----------	----

SERVE OVER CABINET

GRACIA 05	90
-----------	----

ACCESSORIES

91



ISLAND COOLERS

available
with
R290


STELLA 125

FEATURES

- Electronic controller
- Temperature display
- Ventilated cooling
- Automatic defrost and condensate evaporation (with condensate heater)
- Height and tilt of display are adjustable
- Display, base and exterior: black (RAL 9005)
- Surrounding stainless steel bumper
- 4 multidirectional castors for full mobility
- Separately controlled heater for front and rear glass panes



Further RAL colors (optional):



9003 7004 7016 1023 3000 5010 6029 9005



2 STELLA 125 with connection kit (optional)



STELLA 125



Island cooler for impulse sales. Display made of powder-coated, galvanized steel.
Optimal merchandise presentation with glass panes on all sides.

	External dimensions WxDxH mm	Volume net l	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
Stella 125	1250 x 1265 x 925	226	1,16	3M1(-1/+5)	R404A	540	192


Forklift or ramp for unloading must be available on site!

STELLA 125 STEP


FEATURES

- Electronic controller
- Temperature display
- Ventilated cooling
- Automatic defrost and condensate evaporation (with condensate heater)
- Height and tilt of display are adjustable
- Display, base and exterior: black (RAL 9005)
- Surrounding stainless steel bumper
- 4 multidirectional castor wheels for full mobility
- Separately controlled heater for front and rear glass panes

Further RAL colors (optional):



STELLA 125 STEP

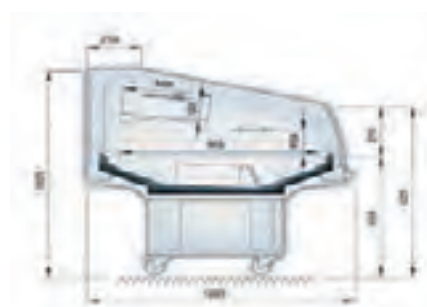

Island cooler for impulse sales. Display made of powder-coated, galvanized steel.
Optimal merchandise presentation with glass panes on all sides.

	External dimensions WxDxH mm	Volume net l	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
Stella 125 Step	1250 x 1225 x 925	162	1,62	3M1(-1/+5)	R404A	553	202

Forklift or ramp for unloading must be available on site!

ISLAND COOLERS

available
with
R290

STELLA 70-07 | 90-07 | 70-12 STEP | 90-12 STEP

FEATURES

- Electronic controller
- Temperature display
- Ventilated cooling
- Automatic defrost and condensate evaporation
- 4 multidirectional castors for full mobility
- Stainless steel bumper
- Display: white (RAL 9003)
- Base: black (RAL 9005)

Further RAL colors (optional):



9003 7004 7016 1023 3000 5010 6029 9005



STELLA 70-07
STELLA 90-07



STELLA 70-12 STEP
STELLA 90-12 STEP



	External dimensions WxDxH mm	Volume net l	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
Stella 70 -07	815x840x925	38	0,48	3M2 (+2/+4)	R404A	262	150
Stella 90 -07	1015x840x925	49	0,62	3M2 (+2/+4)	R404A	338	190
Stella 70 -12 Step	815x795x1125	38	0,59	3M2 (+2/+4)	R404A	271	180
Stella 90 -12 Step	1015x795x1125	49	0,75	3M2 (+2/+4)	R404A	347	230

Forklift or ramp for unloading must be available on site!

ISLAND COOLER WITH GLASS SLIDING LID

available
with
R290

STELLA 125-09


FEATURES

- Electronic controller
- Temperature display
- Automatic defrost and condensate evaporation
- 4 multidirectional castors for full mobility
- Surrounding stainless steel bumper
- Display: white (RAL 9003)
- Frame, front panel and handles: gray (RAL 7037)
- Side panels: gray (RAL 7037)
- Base: black (RAL 9005)

Further RAL colors (optional):



9003 7004 7016 1023 3000 5010 6029 9005

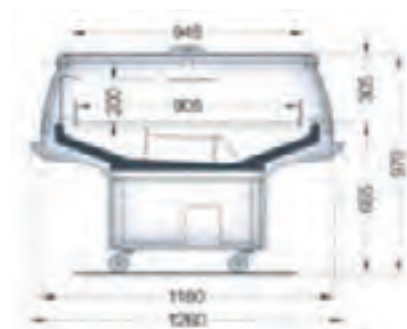

STELLA 125-09 with glass sliding lid

	External dimensions WxDxH mm	Volume net l	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
Stella 125 -09 with glass sliding lid	1250x1260x970	113	1,2	3M1 (-1/+5)	R404A	296	245

Forklift or ramp for unloading must be available on site!

CHEST COOLERS &
FREEZERS

DISPLAY COOLERS

UPRIGHT COOLERS &
FREEZERS

COUNTERTOP &
CAN COOLERS

ISLAND COOLERS & SERVE
OVER DISPLAY CABINETS

ISLAND COOLER WITH SLANTED DISPLAY FOR FRUIT AND VEGETABLES

available
with
R290

STELLA 118-11

FEATURES

- Electronic controller
- Temperature display
- Automatic defrost and condensate evaporation
- 4 multidirectional castors for full mobility
- Display: white (RAL 9003)
- Base: black (RAL 9005)




Further RAL colors (optional):



9003 7004 7016 1023 3000 5010 6029 9005



STELLA 118-11

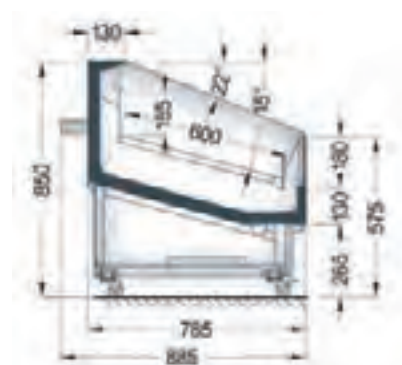

	External dimensions WxDxH mm	Volume net l	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
Stella 118-11	1200x885*x850	70	1,08	3M2 (+2 / +4)	R404A	428	185

*Incl. 100mm wall distance piece.


Forklift or ramp for unloading must be available on site!

STAINLESS STEEL ISLAND COOLER FOR FISH


STELLA FOR FISH

FEATURES

- Electronic controller
- Temperature display
- Display: stainless steel, adjustable tilt
- Automatic defrost and condensate evaporation
- 4 multidirectional castor wheels for full mobility
- Stainless steel front bumper

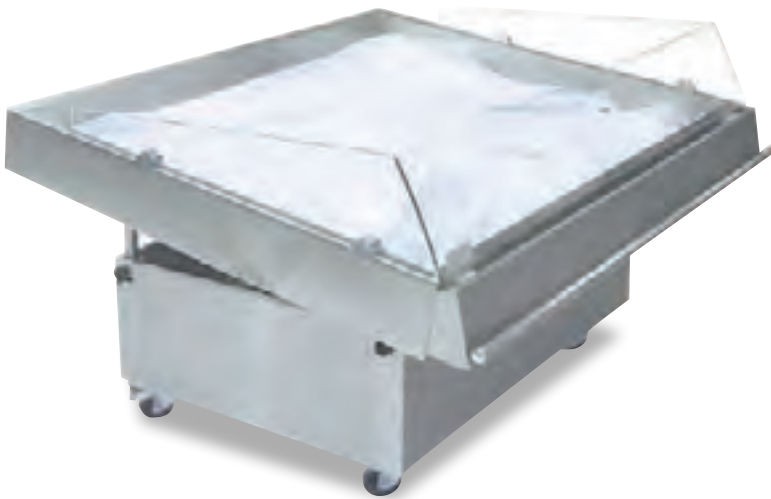

STELLA FOR FISH

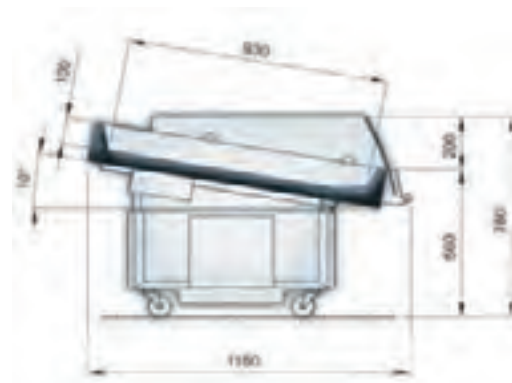

	External dimensions WxDxH mm	Volume net l	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
STELLA FOR FISH	1250x1550x760	111	1,39	3M1 (-1 / +5)	R404A	402	210

Forklift or ramp for unloading must be available on site!

ISLAND COOLER & FREEZER

PAMIR


FEATURES

- Ventilated cooling
- Automatic defrost and condensate evaporation
- Electronic controller
- Adjustable legs
- Casing, base, display: zinc-plated steel
- Base: black (RAL 9005)
- Display: white (RAL 9003)
- Surrounding bumper: light gray

Further RAL colors (optional):




9003 7004 7016 1023 3000 5010 6029 9005

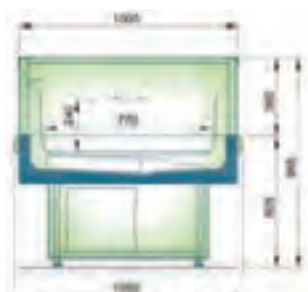

WNP-03-1,0 // WDP-03-1,0



PAMIR WNP-03-1,0 // WDP-03-1,0

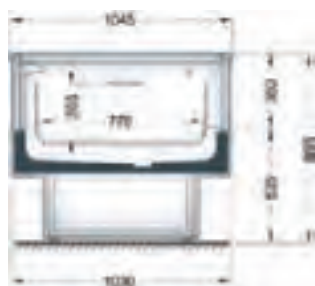

WNP-04



PAMIR WNP-04

	External dimensions BxTxH mm	Display Area m ²	Volume net l	Temperature range °C	Refrigerant type	Rated output W	Weight kg
Pamir 03-WNP-1,0	1050 x 1050 x 965	0,95	166	3L2 (-22/-18°C)	R404a	1281	260
Pamir 03-WDP-1,0	1050 x 1050 x 965	0,95	166	3M1 (-1/+5)	R404a	1281	275
Pamir 04-WNP-1,2	1250 x 1045 x 895	1,12	224	3L1 (-22/-18°C)	R404a	1274	290
Pamir 04-WNP-1,5	1550 x 1045 x 895	1,39	285	3L1 (-22/-18°C)	R404a	1639	300
Pamir 04-WNP-1,2 U	1250 x 1045 x 895	1,12	224	3L1 (-22/-18°C) / 3M1 (-1/+5)	R404a	1274	280
Pamir 04-WNP-1,5 U	1550 x 1045 x 895	1,39	285	3L1 (-22/-18°C) / 3M1 (-1/+5)	R404a	1639	305

Forklift or ramp for unloading must be available on site!

SERVE OVER DISPLAY CABINET (ROW PLACEABLE – IN-LINE & AROUND CORNERS)

GRACIA LDG 04

FEATURES

- Serve Over Cabinet without side walls (see accessories)
- Plexiglass night blind
- Base with doors
- Interior lighting
- Electronic controller with display
- Ventilated cooling
- Service-side stainless steel work surface
- Electronic defrost and automatic condensate evaporation
- Lifting glass lid with gas spring for front-side loading
- Stainless steel display



Further RAL colors (optional):



9003 7004 7016 1023 3000 5010 6029 9005



GRACIA LDG 04

Elegant service counter with rounded front viewing pane.

Gracia	External dimensions WxDxH mm	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
LDG 04-1,25 U	(1250+2 x 40) x 1165 x 1235	0,92	3M1(-1/+5)/3M2 (+2 / +4)	R404A	487	210
LDG 04-1,875 U	(1875+2 x 40) x 1165 x 1235	1,38	3M1(-1/+5)/3M2 (+2 / +4)	R404A	780	225
LDG 04-2,50 U	(2500+2 x 40) x 1165 x 1235	1,83	3M1(-1/+5)/3M2 (+2 / +4)	R404A	1011	360
LDG 04-3,75 U	(3750+2 x 40) x 1165 x 1235	2,75	3M1(-1/+5)/3M2 (+2 / +4)	R404A	1531	432
Inside corner 45°	1225 x 1165 x 1235	0,41	3M1(-1/+5)/3M2 (+2 / +4)	R404A	401	240
Outside corner 45°	1410 x 1165 x 1235	0,92	3M1(-1/+5)/3M2 (+2 / +4)	R404A	408	–
Inside corner 90°	1685 x 1165 x 1235	0,76	3M1(-1/+5)/3M2 (+2 / +4)	R404A	566	–
Outside corner 90°	1950 x 1165 x 1235	1,70	3M1(-1/+5)/3M2 (+2 / +4)	R404A	586	–

Forklift or ramp for unloading must be available on site!

SERVE OVER DISPLAY CABINET

GRACIA LDG 05



FEATURES

- Serve over cabinet without side walls, dark gray (see accessories)
- Plexiglass night blind
- Base with doors
- Interior lighting
- Electronic controller with display
- U version: ventilated cooling
- S version: static refrigeration
- Service-side stainless steel work surface
- Electronic defrost and automatic condensate evaporation
- Stainless steel display
- Bumper: light gray
- Base: black (RAL9005)

Further RAL colors (optional):



9003 7004 7016 1023 3000 5010 6029 9005

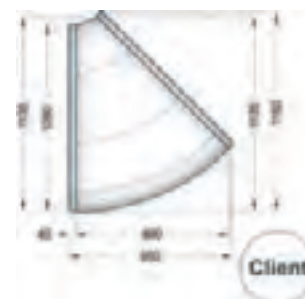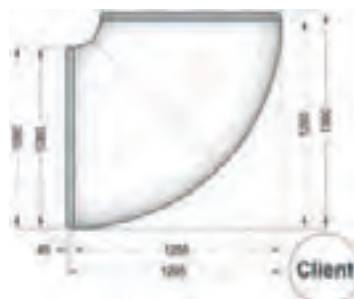

GRACIA LDG/LSG 05

Gracia	External dimensions B x T x H mm	Display Area m ²	Temperature range °C	Refrigerant type	Rated output W	Weight kg
LDG 05-1,2 U	(1125+2x40)x1105x1240	0,84	3M1 (0/+2°C)	R404a	362	145
LDG 05-1,5 U	(1425+2x40)x1105x1240	1,07	3M1 (0/+2°C)	R404a	507	170
LDG 05-1,7 U	(1625+2x40)x1105x1240	1,22	3M1 (0/+2°C)	R404a	507	205
LDG 05-2,0 U	(1925+2x40)x1105x1240	1,44	3M1 (0/+2°C)	R404a	575	280
LDG 05-2,5 U	(2250+2x40)x1105x1240	1,68	3M1 (0/+2°C)	R404a	708	350
LDG 05-3,0 U	(2850+2x40)x1105x1240	2,13	3M1 (0/+2°C)	R404a	1055	390
LSG 05-1,2 S	(1125+2x40)x1105x1240	0,84	3H1 (+4/+8°C)	R404a	426	145
LSG 05-1,5 S	(1425+2x40)x1105x1240	1,07	3H1 (+4/+8°C)	R404a	507	170
LSG 05-1,7 S	(1625+2x40)x1105x1240	1,22	3H1 (+4/+8°C)	R404a	507	205
LSG 05-2,0 S	(1925+2x40)x1105x1240	1,44	3H1 (+4/+8°C)	R404a	677	280
LSG 05-2,5 S	(2250+2x40)x1105x1240	1,68	3H1 (+4/+8°C)	R404a	818	350
LSG 05-3,0 S	(2850+2x40)x1105x1240	2,13	3H1 (+4/+8°C)	R404a	1055	390
Innenecke 45° NW - S	siehe Maßzeichnung	0,14	3H1 (+4/+8°C)	R404a	426	–
Außenecke 45° NZ - U	siehe Maßzeichnung	0,71	3M1 (0/+2°C)	R404a	362	–
Innenecke 90° NW - S	siehe Maßzeichnung	0,27	3H1 (+4/+8)	R404a	852	–
Außenecke 90° NZ - U	siehe Maßzeichnung	1,48	3M1 (0/+2°C)	R404a	442	360

Forklift or ramp for unloading must be available on site!

ACCESSORIES

STELLA

Connection kit row
 Connection kit island
 Casing color (non-standard RAL colors)
 Display color (non-standard RAL colors)
 White inlay grates, set of 2 (620 – 895 mm)
 R290

PAMIR

Night cover (ABS plastic)
 Wire grid dividers (180 x 790)
 Inlay grates (758 x 438) set of 2
 Castors, set of 4
 Special color – display area
 Special color – exterior without base

Night cover (ABS plastic)
 Glass sliding lid
 Wire grid dividers (180 x 790)
 Inlay grates (460 x 758) 1 pc.
 Castors, set of 4
 Special color – display area
 Special color – exterior without base

GRACIA

Left side wall
 Right side wall
 Low divider
 High divider
 Bag rest
 Glass shelf inside display area
 Additional shelf for scale/cash register, fixed
 Additional shelf for scale/cash register, flexible
 Rail for flexible additional shelf
 Lifting glass pane with gas spring for front-side loading
 Special colors
 Plastic bag holder
 Special lighting for fish or poultry
 Power socket

CHEST COOLERS &
FREEZERS

DISPLAY COOLERS

UPRIGHT COOLERS &
FREEZERS

COUNTERTOP &
CAN COOLERS

ISLAND COOLERS & SERVE
OVER DISPLAY CABINETS

STAINLESS STEEL
COOLERS & FREEZERS



Stainless Steel Coolers & Freezers

COOLING & FREEZING CABINETS 550/1100 LITERS, GN 1/1

CM / CN 500 | CM / CN 1000 94

COOLERS 700 LITERS, GN 2/1

CM 700 95

FREEZERS 700 LITERS, GN 2/1

CN 700 96

DOUBLE DOOR COOLERS 1400 LITERS, GN 2/1

CM 1400 97

DOUBLE DOOR FREEZERS 1400 LITERS, GN 2/1

CN 1400 98

2-TEMPERATURE CABINETS 700 LITERS, GN 2/1

CM/CN 700 SS | CM/CM 700 SS 99

STORAGE COOLER FOR FISH

CFF 601 100

BAKERY COOLERS & FREEZERS, EN1/EN2

ABK EN 1/2 | ABF EN 1/2 101

COMMUNITY COOLER

CM CAMP 700 102

UNIT CONFIGURATION OPTIONS

103

COOLING & FREEZING COUNTERS, GN 1/1

TM / TN 2 | 3 | 4 104

WASTE COOLERS | CONDEMNED MATERIAL COOLERS

ARW 105



COOLING & FREEZING CABINETS 550/1100 LITERS, GN 1/1



CM / CN 500 SS | CM / CN 1000 SS

FEATURES

- Electronic digital control
- Ventilated cooling
- Automatic defrost and condensate evaporation
- Coated evaporator outside of interior
- 70 mm all-around insulation (CFC-free)
- Self-closing door
- Magnetic door seal
- 4 adjustable plastic-coated lattice shelves (530x550 mm) per door
- Cylinder lock
- Rounded bottom pan
- Adjustable legs
- Casing and innerliner: stainless steel – chrome nickel steel (zinc-plated rear wall)
- Variant: SV version: heated insulated glass doors
- Depth with door open: 1340 mm

OPTIONS

- Additional shelves and shelf rails
- Castors
- Variant: R version: remote, includes magnetic valve (specify refrigerant with order)
- RS 485 interface



CM 500 SS



CM 1100 SS

Professional Gastronorm cooler and freezer cabinets for use in canteen kitchens and catering.

	External Dimensions W x D x H mm	Internal Dimensions W x D x H mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output W	Weight kg
CM 500 SS	710 x 700 x 2000	570 x 560 x 1460	550	-2 / +8	R404A	425	140
CM 500 SS-SV	710 x 700 x 2000	570 x 560 x 1460	550	+2 / +10	R404A	460	145
CN 500 SS	710 x 700 x 2000	570 x 560 x 1460	550	-18/-24	R404A	600	152
CN 500 SS-SV	710 x 700 x 2000	570 x 560 x 1460	550	-18/-24	R404A	500	145
CM 1100 SS	1420 x 700 x 2000	1280 x 560 x 1460	1100	-2 / +8	R404A	640	220
CN 1100 SS	1420 x 700 x 2000	1280 x 560 x 1460	1100	-18/-24	R404A	700	235



CM 700

FEATURES

- 70 mm all-around insulation (CFC-free)
- Electronic control
- Ventilated cooling
- Automatic defrost and condensate evaporation
- 4 adjustable plastic-coated shelves (GN 2/1)
- Coated evaporator outside of interior
- Adjustable legs
- Rounded bottom pan
- Magnetic door seal
- Self-closing door (mountable on either side)
- Cylinder lock
- Interior lighting
- Variants:
 - SS – casing and innerliner: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - B – casing: white, interior: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - SV – heated insulated glass door
 - R – remote, includes magnetic valve

OPTIONS

- Additional shelves and shelf rails
- Divided door
- RS 485 interface
- Castors



CM 700 SS



CM 700 SS SV

Professional Gastronorm refrigerators for use in canteen kitchens and catering.

	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output* w/o defrost heater! W	Weight kg
CM 700 SS	710x800x2000	570x660x1460	650	-2/+8	R404A	425	150
CM 700 SS-R	710x800x2000	570x660x1460	650	-2/+8	–	120*	145
CM 700 SS-SV	710x800x2000	570x660x1460	650	+2/+10	R404A	425	160
CM 700 B	710x800x2000	570x660x1460	650	-2/+8	R404A	425	150
CM 700 B-R	710x800x2000	570x660x1460	650	-2/+8	–	120*	145
CM 700 B-SV	710x800x2000	570x660x1460	650	+2/+10	R404A	425	160



CN 700

FEATURES

- 70 mm all-around insulation (CFC-free)
- Electronic control
- Ventilated cooling
- Automatic defrost and condensate evaporation
- 4 adjustable plastic-coated lattice shelves (GN 2/1)
- Coated evaporator outside of interior
- Adjustable legs
- Rounded bottom pan
- Magnetic door seal
- Self-closing door (mountable on either side)
- Cylinder lock
- Interior lighting
- Variants:
 - SS – interior and exterior lining: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - B – exterior: white, interior: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - SV – heated insulated glass door
 - R – remote, includes magnetic valve

OPTIONS

- Additional shelves and shelf rails
- Divided door
- RS 485 interface
- Castors



CN 700 SS



CN 700 SS

Professional Gastronorm freezers for use in canteen kitchens and catering.

	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output* w/o defrost heater! W	Weight kg
CN 700 SS	710x800x2000	570x660x1460	650	-18/-24	R404A	600	162
CN 700 SS-R	710x800x2000	570x660x1460	650	-18/-24	–	140 *	150
CN 700 SS-SV	710x800x2000	570x660x1460	650	-18/-24	R404A	700	170
CN 700 B	710x800x2000	570x660x1460	650	-18/-24	R404A	600	162
CN 700 B-R	710x800x2000	570x660x1460	650	-18/-24	–	140 *	150
CN 700 B-SV	710x800x2000	570x660x1460	650	-18/-24	R404A	700	170

DOUBLE DOOR COOLERS 1400 LITER, GN 2/1



CM 1400

FEATURES

- 70 mm all-around insulation (CFC-free)
- Electronic control
- Ventilated cooling
- Automatic defrost and condensate evaporation
- 8 adjustable plastic-coated lattice shelves (GN 2/1)
- Coated evaporator outside of interior
- Adjustable legs
- Rounded bottom pan
- Magnetic door seal
- Self-closing door (mountable on either side)
- Cylinder lock
- Interior lighting
- Variants:
 - SS – interior and exterior lining: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - B – exterior: white, interior: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - SV – heated insulated glass door
 - R – remote, includes magnetic valve

OPTIONS

- Additional shelves and shelf rails
- RS 485 interface
- Castors



CM 1400 SS



CM 1400 SS

Professional Gastronorm double door coolers for use in canteen kitchens and catering.

	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output* w/o defrost heater! W	Weight kg
CM 1400 SS	1420x800x2000	1280x660x1460	1300	-2 / +8	R404A	640	230
CM 1400 SS-R	1420x800x2000	1280x660x1460	1300	-2 / +8	–	150 *	230
CM 1400 SS-SV	1420x800x2000	1280x660x1460	1300	+2 / +10	R404A	700	250
CM 1400 B	1420x800x2000	1280x660x1460	1300	-2 / +8	R404A	640	230
CM 1400 B-R	1420x800x2000	1280x660x1460	1300	-2 / +8	–	210 *	230
CM 1400 B-SV	1420x800x2000	1280x660x1460	1300	+2 / +10	R404A	700	250

DOUBLE DOOR FREEZERS 1400 LITER, GN 2/1



CN 1400

FEATURES

- 70 mm all-around insulation (CFC-free)
- Electronic control
- Ventilated cooling
- Automatic defrost and condensate evaporation
- 8 adjustable plastic-coated shelves (GN 2/1)
- Coated evaporator outside of interior
- Adjustable legs
- Rounded bottom pan
- Magnetic door seal
- Self-closing door (mountable on either side)
- Cylinder lock
- Interior lighting
- Variants:
 - SS – interior and exterior lining: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - B – exterior: white, interior: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
 - SV – heated insulated glass door
 - R – remote, includes magnetic valve

OPTIONS

- Additional shelves and shelf rails
- RS 485 interface
- Castors



CN 1400 SS



CN 1400 SS

Professional Gastronorm 2-door freezers for extra storage capacity.

	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output* w/o defrost heater! W	Weight kg
CN 1400 SS	1420x800x2000	1280x660x1460	1300	-18/-24	R404A	700	245
CN 1400 SS-R	1420x800x2000	1280x660x1460	1300	-18/-24	–	150 *	240
CN 1400 SS-SV	1420x800x2000	1280x660x1460	1300	-18/-24	R404A	900	270
CN 1400 B	1420x800x2000	1280x660x1460	1300	-18/-24	R404A	700	245
CN 1400 B-R	1420x800x2000	1280x660x1460	1300	-18/-24	–	150 *	240
CN 1400 B-SV	1420x800x2000	1280x660x1460	1300	-18/-24	R404A	900	270

2-TEMPERATURE CABINETS 700 LITER, GN 2/1

CM/CN 700 SS | CM/CM 700 SS

FEATURES

- Odor-separated compartments
- 70 mm all-around insulation (CFC-free)
- 2 electronic controls
- Ventilated cooling
- Automatic defrost and condensate evaporation
- 4 adjustable plastic-coated lattice shelves (GN 2/1)
- Coated evaporator outside of interior
- Adjustable legs
- Rounded bottom pan
- Magnetic door seal
- Self-closing doors
- Cylinder lock
- Variant:
 - SS – interior and exterior lining: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall
- Model CM/CN 700SS:
 - Top compartment: cooler
 - Bottom compartment: freezer

OPTIONS

- Additional shelves and shelf rails
- RS 485 interface
- Also available for remote: without compressor, with injection valve
- Castors



CM/CN 700 SS



CM/CM 700 SS

Professional stainless steel cabinets with 2 separately controlled compartments for chilled and/or frozen products.

	External Dimensions W x D x H mm	Internal Dimensions W x D x H mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output W	Weight kg
CM/CN 700 SS	710 x 800 x 2000	2x(570x650x650)	560	-2 bis +8 / -18 bis -22	R404A	720	165
CM/CM 700 SS	710 x 800 x 2000	2x(570x650x650)	560	-2 bis +8 / -2 bis +8	R404A	540	165

STORAGE COOLER FOR FISH

CFF 601

FEATURES

- 70 mm all-around insulation (CFC-free)
- Electronic control
- Ventilated cooling
- Automatic defrost and condensate evaporation
- Coated evaporator outside of interior
- Adjustable legs
- Rounded bottom pan
- Magnetic door seal
- Self-closing door (mountable on either side)
- Cylinder lock
- Interior lighting
- Interior with 12 plastic fish trays 600x400 mm, 70 mm deep, with perforated stainless steel plate
- Casing and innerliner: stainless steel AISI304, chrome nickel steel, zinc-coated rear wall

OPTIONS

- 4 wheels; front two wheels pivoting with parking brake
- RS 485 interface



Plastic fish trays with perforated stainless steel plate



CFF 601

	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Capacity l	Temperature Range°C	Refrigerant	Rated Output W	Weight kg
CFF 601	780 x 680 x 2000	570 x 660 x 1460	505	–4 bis +6	R404A	425	140

BAKERY COOLERS & FREEZERS, EN1/EN2

ABK | ABF

FEATURES

- Casing and innerliner: stainless steel, zinc-coated rear wall
- 70 mm all-around insulation (CFC-free)
- 20 pairs of L-shaped rails for baking sheets size 400x600 mm (EN1) or 800x600 mm (EN2)
- Electronic control
- Self-closing door (mountable on either side)
- Door handle over entire door height
- Door contact switch
- Lock
- Replaceable magnetic door seal
- Rounded bottom pan
- Adjustable legs

OPTIONS

- Castors
- Additional rails



ABK EN1

Euronorm Coolers and freezers for storage of bakery and confectionery products.

	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output W	Weight kg
ABK EN1	780 x 680 x 2000	640 x 540 x 1460	505	-3/+10	R404A	425	140
ABK EN2	780 x 960 x 2000	640 x 820 x 1460	770	-3/+10	R404A	640	170
ABF EN1	780 x 680 x 2000	640 x 540 x 1460	505	-5/-24	R404A	600	150
ABF EN2	780 x 960 x 2000	640 x 820 x 1460	770	-5/-24	R404A	700	180

COMMUNITY COOLER

CM CAMP 700

FEATURES

- Ventilated cooling
- 10 lockable stainless steel compartments
- Electronic digital control
- Evaporator outside of interior
- Automatic defrost and condensate evaporation
- Interior and exterior lining: stainless steel CNS 18/10
- 70 mm all-around insulation (CFC-free)
- Outer door handle over entire door height
- Lockable outer door (mountable on either side)
- Replaceable magnetic door seal
- Adjustable legs

OPTIONS

- Castors



	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output W	Weight kg
CM Camp 700	710x800x2000	570x660x1460	650	-2 bis +8	R404A	425	180

UNIT CONFIGURATION OPTIONS

ACCESSORY

Castors
Divided door (only for 550-Liter and 700-Liter cabinets)
Stainless steel shelves GN 2/1
Additional plastic-coated shelves GN 2/1
Fat filter
U-shaped rails (for GN 2/1 cabinets)
L-shaped rails (for GN /1 cabinets)
Refrigerant R290

CHEST COOLERS &
FREEZERS

DISPLAY COOLERS

UPRIGHT COOLERS &
FREEZERS

COUNTERTOP &
CAN COOLERS

ISLAND COOLERS & SERVE
OVER DISPLAY CABINETS

STAINLESS STEEL
COOLERS & FREEZERS

COOLING & FREEZING COUNTERS, GN 1/1, WITH SIDE-MOUNTED MACHINERY COMPARTMENT

TM | TN

FEATURES

- Casing and innerliner: stainless steel AISI 304
- Plug in, with ventilated cooling
- 70 mm all-around insulation (CFC-free)
- Removable shelf rails for easy cleaning
- Door remains open at 110° for easy loading
- 1 GN 1/1 shelf per door
- Magnetic door seals
- Adjustable legs (110 – 180 mm)
- Automatic defrost and condensate evaporation



TM 2



TM 3

Optional drawers



TM 4

Unit configuration options

Drawers not available for freezer models

Drawers 1/2 +1/2

Drawers 3 x 1/3

	External Dimensions WxDxH mm	Capacity l	Temperature Range °C	Refrigerant	Rated Output W	Weight kg
TM 2	1380x700x850	265	-2 / +8	R404A	350	100
TM 3	1880x700x850	420	-2 / +8	R404A	450	120
TM 4	2380x700x850	575	-2 / +8	R404A	560	150
TN 2	1380x700x850	265	-18 / -24	R404A	400	110
TN 3	1880x700x850	420	-18 / -24	R404A	580	130
TN 4	2380x700x850	575	-18 / -24	R404A	720	160

WASTE / CONDEMNED MATERIAL COOLERS FOR ROLL-IN BINS 120 OR 240 LITERS

ARW 1 | 2 | 3

FEATURES

- 60 mm CFC-free insulation
- Digital-electronic thermostat
- Air-supported stainless steel rear wall evaporator (foam-fixed)
- Automatic defrost and condensate evaporation
- Interior and exterior liner: stainless steel
- Magnetic door seals
- Machinery/installation compartment on right-hand side
- Variant:
R model remote

OPTIONS

- Available with solid floor
- Lockable doors and waste hatches



ARW1PD-R



ARW1RD



ARW2RD



ARW3PD-R

	External Dimensions WxDxH mm	Internal Dimensions WxDxH mm	Temperature Range °C	Waste bin capacity (120 o. 240 l)	Refrigerant	Rated output W	Power con- sumption W	Weight kg
ARW1RD	1100x875x1210	650x760x1100	+2/+12	1	R404A	280	380	120
ARW1PD-R	950x875x1210	650x760x1100	+2/+12	1	R404A	280	130	103
ARW2RD	1750x875x1210	1300x760x1100	+2/+12	2	R404A	338	423	167
ARW2PD-R	1600x875x1210	1300x760x1100	+2/+12	2	R404A	338	130	150
ARW3RD	2400x875x1210	1950x760x1100	+2/+12	3	R404A	449	535	206
ARW3PD-R	2250x875x1210	1950x760x1100	+2/+12	3	R404A	449	130	189



Ice Makers

TYPES OF ICE	108
ICE CUBE MAKERS	109
TUBE ICE MAKERS	112
FLAKE ICE MAKERS	112
CRUSHED ICE MAKERS	113
ICE CHIP MAKERS	114
COLLECTION/STORAGE CONTAINERS	115



TYPES OF ICE



①



②



③



④



⑤

- ① Ice Cube D-13 g
- ② Ice Cube 7 g
- ③ Ice Finger A-20 g
- ④ Ice Flakes
- ⑤ Ice Chips



ICE CUBE MAKERS



CB 184



CB 246



CB 249



CB 316



CB 425



CB 640



CB 955



CB 1265



CB 1565

Ice cube makers (spray system) with built-in container.

A = air-cooled

W = water-cooled

	Dimensions WxD x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
CB 184 A	355 x 404 x 590	R404A	D-13 g	4	21	4,5	230/50	320	28
CB 184 W	355 x 404 x 590	R404A	D-13 g	4	21	20	230/50	320	28
CB 246 A	390 x 460 x 610	R404A	D-13 g	6	24	5,1	230/50	350	35
CB 246 W	390 x 460 x 610	R404A	D-13 g	6	24	14,0	230/50	350	35
CB 249 A	390 x 460 x 690	R404A	D-13 g	9	28	5,1	230/50	370	37
CB 249 W	390 x 460 x 690	R404A	D-13 g	9	28	14	230/50	370	37
CB 316 A	500 x 580 x 690	R404A	D-13 g	16	33	3,3	230/50	370	48
CB 316 W	500 x 580 x 690	R404A	D-13 g	16	33	13	230/50	370	48

	Dimensions WxD x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
CB 416 A	500 x 580 x 690	R404A	D-13 g	16	42	4	230/50	450	52
CB 416 W	500 x 580 x 690	R404A	D-13 g	16	42	15	230/50	450	52
CB 425 A	500 x 580 x 800	R404A	D-13 g	25	46	4	230/50	500	56
CB 425 W	500 x 580 x 800	R404A	D-13 g	25	46	14	230/50	500	56
CB 640 A	738 x 600 x 920	R404A	D-13 g	40	65	2,8	230/50	650	77
CB 640 W	738 x 600 x 920	R404A	D-13 g	40	65	12,8	230/50	650	77
CB 840 A	738 x 600 x 920	R404A	D-13 g	40	80	2,6	230/50	800	86
CB 840 W	738 x 600 x 920	R404A	D-13 g	40	80	14,4	230/50	800	86

	Dimensions WxD x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
CB 955 A	738 x 600 x 1020	R404A	D-13 g	55	90	2,5	230/50	850	89
CB 955 W	738 x 600 x 1020	R404A	D-13 g	55	90	14,2	230/50	850	89
CB 1265 A	840 x 740 x 1075	R404A	D-13 g	65	130	2,8	230/50	1050	113
CB 1265 W	840 x 740 x 1075	R404A	D-13 g	65	130	15,3	230/50	1050	113
CB 1565 A	840 x 740 x 1075	R404A	D-13 g	65	155	2,6	230/50	1400	118
CB 1565 W	840 x 740 x 1075	R404A	D-13 g	65	155	13	230/50	1400	118

ICE CUBE MAKERS

FEATURES

- Suitable for embedment, with ventilation and controls at the front.



IC 18



IC 24



IC 30

Shelf-installable ice cube makers (spray system) with built-in container.

A = air-cooled

W = water-cooled

	Dimensions WxD x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
IC 18 A	540 x 430 x 470	R404A	D-13 g	4	21	4,5	230/50	320	34
IC 24 A	595 x 510 x 502	R404A	D-13 g	6	24	5,1	230/50	350	41
IC 30 A	705 x 625 x 560	R404A	D-13 g	16	33	3,3	230/50	370	52



C 80



C 150



C 300

Ice cube makers (spray system) without container.

A = air-cooled

W = water-cooled

	Suitable Ice Container	Dimensions WxD x H mm	Refrigerant	Ice Type	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
C 80 A	BIN 240 PE BIN 200	862 x 470 x 620	R404A	D-13 g	90	2,2	230/50	850	83
C 80 W	BIN 240 PE BIN 200	862 x 470 x 620	R404A	D-13 g	90	13,5	230/50	850	83
C 150 A	BIN 240 PE BIN 200 BIN 350	862 x 555 x 720	R404A	D-13 g	155	2,6	230/50	1400	118
C 150 W	BIN 240 PE BIN 200 BIN 350	862 x 555 x 720	R404A	D-13 g	155	13	230/50	1400	118
C 300 A	BIN 350	1250 x 580 x 848	R404A	D-13 g	300	2,6	230/50	2600	152
C 300 W	BIN 350	1250 x 580 x 848	R404A	D-13 g	300	14,3	230/50	2600	152

ICE CUBE MAKERS



VM 350



VM 500

Ice cube makers (vertical evaporator system) without container.

A = air-cooled

W = water-cooled

	Suitable Ice Container	Dimensions W x D x H mm	Refrigerant	Ice Type	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V / Hz	Rated Output W	Weight kg
VM 350 A	BIN 200 BIN 240 PE	540 x 544 x 747	R404A	7 g	140	2,8	230/50	1400	73
VM 350 W	BIN 200 BIN 240 PE	540 x 544 x 747	R404A	7 g	140	13,5	230/50	1400	73
VM 500 A	BIN 240 PE BIN 200 BIN 350 DRB 100	770 x 550 x 805	R404A	7 g	200	2,4	230/50	1600	90
VM 500 W	BIN 240 PE BIN 200 BIN 350 DRB 100	770 x 550 x 805	R404A	7 g	200	13	230/50	1600	90
VM 900 A	BIN 240 PE BIN 200 BIN 350 DRB 100	770 x 550 x 805	R404A	7 g	400	1,8	230/50	3000	113
VM 900 W	BIN 240 PE BIN 200 BIN 350 DRB 100	770 x 550 x 805	R404A	7 g	400	13	230/50	3000	113
VM 1700 A	BIN 350	1250 x 645 x 950	R404A	7 g	770	1,4	230/50	4300	186



VB 250



DSS 42



Fresh Maker W



IW 45

A = air-cooled

W = water-cooled

	Dimensions W x D x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V / Hz	Rated Output W	Weight kg
--	-------------------------	-------------	----------	------------	-----------------	------------------------	----------------------------	----------------	-----------

Ice cube makers (vertical evaporator system) with container.

VB 250 A	738 x 600 x 980	R404A	7 g	35	105	2,5	230/50	850	75
VB 250 W	738 x 600 x 980	R404A	7 g	35	105	14,2	230/50	850	75

Ice cube makers with cube dispenser (spray system).

DSS 42 A	500 x 630 x 920	R404A	D-13 g	12	42	4	230/50	450	66
DSS 42 W	500 x 630 x 920	R404A	D-13 g	12	42	15	230/50	450	66

Ice cube makers with cold water dispenser.

Fresh Maker W	540 x 430 x 435	R404A	D-13 g	4	21	37,4	230/50	320	35
IW 45 A	688 x 580 x 800	R404A	D-13 g	25	42	4	230/50	450	71
IW 45 W	688 x 580 x 800	R404A	D-13 g	25	42	15	230/50	450	71

TUBE ICE MAKERS



IMF 28



IMF 35



IMF 58



IMF 80

Tube ice makers (paddle system) with ice container.

A = air-cooled

W = water-cooled

	Dimensions W x D x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
IMF 28 A	390 x 460 x 690	R404A	A-20 g	8	25	4,5	230/50	310	38
IMF 28 W	390 x 460 x 690	R404A	A-20 g	8	25	15,5	230/50	310	38
IMF 35 A	500 x 580 x 690	R404A	A-20 g	15	32	4,4	230/50	310	47
IMF 35 W	500 x 580 x 690	R404A	A-20 g	15	32	13,3	230/50	310	47
IMF 58 A	500 x 580 x 800	R404A	A-20 g	20	45	3,3	230/50	420	54
IMF 58 W	500 x 580 x 800	R404A	A-20 g	20	45	10,5	230/50	420	54
IMF 80 A	738 x 600 x 920	R404A	A-20 g	30	75	3,3	230/50	480	75
IMF 80 W	738 x 600 x 920	R404A	A-20 g	30	75	10,5	230/50	480	75

FLAKE ICE MAKERS



GB 902



GB 1540



GB 1555

Flake ice makers with container.

A = air-cooled

W = water-cooled

	Dimensions W x D x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
GB 902 A	500 x 660 x 690	R404A	Flakes	20	90	1	230/50	550	59
GB 902 W	500 x 660 x 690	R404A	Flakes	20	90	6,3	230/50	550	59
GB 903 A	500 x 660 x 800	R404A	Flakes	30	90	1	230/50	550	67
GB 903 W	500 x 660 x 800	R404A	Flakes	30	90	6,3	230/50	550	67
GB 1540 A	738 x 690 x 920	R404A	Flakes	40	150	1	230/50	650	85
GB 1540 W	738 x 690 x 920	R404A	Flakes	40	150	6,4	230/50	650	85
GB 1555 A	738 x 690 x 1020	R404A	Flakes	55	150	1	230/50	650	94
GB 1555 W	738 x 690 x 1020	R404A	Flakes	55	150	6,4	230/50	650	94

CRUSHED ICE MAKERS

FEATURES

- Brushed stainless steel



TB 852

Crushed ice makers for cocktails, etc.

A = air-cooled W = water-cooled

	Dimensions WxD x H mm	Refrigerant	Ice Type	Storage kg	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
TB 852 A	500 x 660 x 690	R404A	Crushed Ice	20	85	1	230/50	550	59
TB 852 W	500 x 660 x 690	R404A	Crushed Ice	20	85	6,3	230/50	550	59



G 250



G 500



G 1000



G 500 Split

Flake ice makers without container.

A = air-cooled W = water-cooled

	Suitable Ice Container	Dimensions WxD x H mm	Refrigerant	Ice Type	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
G 150 A	BIN 240 PE BIN 200	640 x 470 x 555	R404A	Flakes	150	1	230/50	650	59
G 150 W	BIN 240 PE BIN 200	640 x 470 x 555	R404A	Flakes	150	6,4	230/50	650	59
G 250 A	BIN 240 PE BIN 200 BIN 350 RB 100 DRB 100	640 x 470 x 700	R404A	Flakes	250	1	230/50	1050	82
G 250 W	BIN 240 PE BIN 200 BIN 350 RB 100 DRB 100	640 x 470 x 700	R404A	Flakes	250	5,2	230/50	1050	82
G 500 A	BIN 240 PE BIN 200 BIN 350 BIN 550 VDS RB 100 DRB 100 DRB 500	640 x 470 x 700	R404A	Flakes	500	1	230/50	1700	104
G 500 W	BIN 240 PE BIN 200 BIN 350 BIN 550 VDS RB 100 DRB 100 DRB 500	640 x 470 x 700	R404A	Flakes	500	5,3	230/50	1700	104
G 500 Split	BIN 240 PE BIN 200 BIN 350 BIN 550V DS RB 100 DRB 100 DRB 500	640 x 470 x 700	R404A	Flakes	500	1	230/50	1750	64
G 1000 A	BIN 550V DS DRB 500	934 x 684 x 700	R404A	Flakes	1000	1	380/50	3200	172
G 1000 W	BIN 550V DS DRB 500	934 x 684 x 700	R404A	Flakes	1000	5,3	380/50	3200	172
G 1000 Split	BIN 550V DS	474 x 684 x 700	R404A	Flakes	1000	–	230/50	3500	112

ICE CHIP MAKERS

FEATURES

- Models Muster 350 to 2000 without container
- For placement atop containers (see p. 115)



Muster 350



Muster 800

Ice chip makers

A = air-cooled

W = water-cooled

	Suitable Ice Container	Dimensions W x D x H mm	Refrigerant	Ice Type	Capacity kg/24h	Water Consumption l/kg	Voltage / Frequency V/Hz	Rated Output W	Weight kg
Muster 350 A	BIN 550V DS BIN 350 DRB 100	900 x 588 x 705	R404A	Chips	400	1	230/50	2100	137
Muster 350 W	BIN 550V DS BIN 350 DRB 100	900 x 588 x 705	R404A	Chips	400	7,5	230/50	2100	137
Muster 600 A	BIN 550V DS DRB 500	900 x 588 x 705	R404A	Chips	620	A 1 / W 1	380/50	3000	151
Muster 800 A	BIN 550 VDS DRB 500	1107 x 700 x 880	R404A	Chips	900	1	380/50	4600	241
Muster 800 W	BIN 550 VDS DRB 500	1107 x 700 x 880	R404A	Chips	900	6,9	380/50	4600	241
Muster 1500 A	BIN 550 VDS DRB 500	1107 x 700 x 970	R404A	Chips	1500	1	380/50	6000	306
Muster 2000 A	—	1062 x 832 x 1423	R404A	Chips	2200	1	380/50	7000	460



M 350 Split
(rear view)

Remote ice chip makers (for use with external chiller).

	Suitable Ice Container	Dimensions W x D x H mm	Refrigerant	Ice Type	Capacity kg/24h	Voltage / Frequency V/Hz	Automatic Defrost	Weight kg
M 350 Split	BIN 350 DRB 100	495 x 588 x 705	R404A	Chips	400	230/50	2200/-23	66
M 600 Split	BN 240 PE BIN 550 VDS BIN 200 BIN 350 RB 100 DRB 100 DRB 500	495 x 588 x 705	R404A	Chips	620	230/50	3500/-22	73
M 800 Split	BIN 350 DRB 100 DRB 500 BIN 550 VDS	604 x 700 x 880	R404A	Chips	900	230/50	5000/-23	138
M 1500 Split	BIN 350 BIN 550 VDS DRB 100 DRB 500	604 x 700 x 970	R404A	Chips	1500	230/50	8550/-24	144
M 2000 Split	—	736 x 832 x 1075	R404A	Chips	2200	380/50	12000/-27	300

COLLECTION/STORAGE CONTAINERS



RB 100



BIN 240 PE



BIN 350



DRB 100



BIN 550 VDS

	Suitable for which models	Dimensions WxD x H mm	Capacity kg	Weight kg
BIN 240 PE	C 80-C 150, VM 350, VM 500, V M 900, G 250, G 500	942 x 795 x 1053	240	61
BIN 200	C 150, C 300, VM 500, VM 900, G 250, G 500, Muster 350	870 x 790 x 1000	200	74
BIN 350	C 150, C 300, VM 500, VM 900, VM 1700, G 250, G 500, Muster 350, Muster 600, M 350 Split, M 600 Split	1250 x 790 x 1000	350	105
BIN 550 VDS	G 500 (x2), G 1000, G 500 Split (2x), Muster 350, Muster 600, Muster 800, Muster 1500	1110 x 1060 x 1915	550	163
RB 100	G 250, G 500, G 500 Split	795 x 1060 x 1284	108/17	64
DRB 100	VM 500, VM 900, G 500 Split, G 250, G 500, G 250 (x2), G 500 (x2), Muster 350 600	1560 x 1060 x 1484	2x 108/50	135
DRB 500	M 800, M 800 Split, M 1500, M600 Split, M 1500 Split, G 500 (x2), G 1000, G 500 Split	1560 x 1145 x 1780 (x2)	2x 108/300	129/75

CHEST COOLERS &
FREEZERS

DISPLAY COOLERS

UPRIGHT COOLERS &
FREEZERS

COUNTERTOP &
CAN COOLERS

ISLAND COOLERS & SERVE
OVER DISPLAY CABINETS

STAINLESS STEEL
COOLERS & FREEZERS

ICE MAKERS